

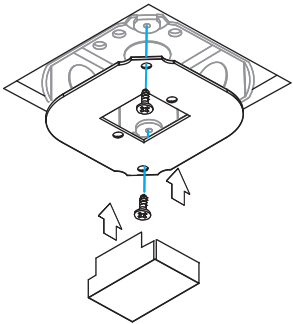



SMART SURFACE TUBED 3.2 for 1xLED 0-10V/MAINS 1%

US_128440XX - US_128441XX - US_128431XX - US_128433XX



FOR OCTAGONAL BOX 4" by 4"
(POUR OCTAGONAL BOX 4 "par 4")





MIN 60°C (140F) SUPPLY CONDUCTORS
LES FILS D'ALIMENTATION 60°C (140F) MIN
CONDUCTORES DE ALIMENTACIÓN 60°C (140F) Min

0-10V 120-277 Vac
50/60 Hz

MAINS 120 Vac
50/60 Hz

NEUTRAL (NEUTRE) = WHITE (BLANC)
GROUND (TERRE) = YELLOW/GREEN (JAUNE/VERT)
LINE (LIGNE) = BLACK (NOIR)

OPTIONAL:
0-10V + = PURPLE (VIOLET)
0-10V - = GREY (GRIS)

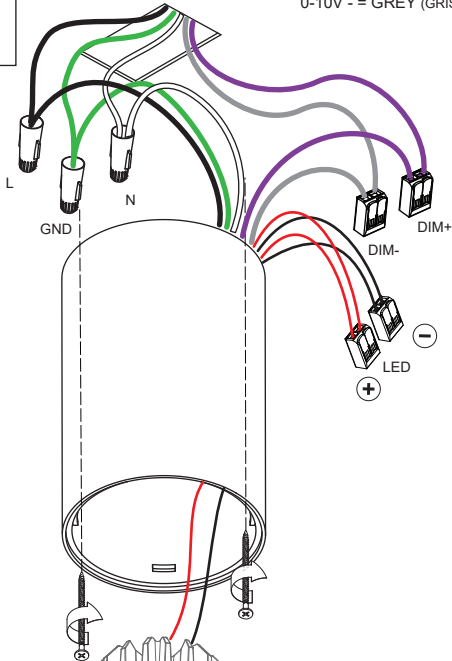

INSTALL SMART 3.2 FIXTURE
(NOT INCLUDED/PAS INCLUS)

CONSTANT CURRENT
+ = RED (ROUGE)
- = BLACK (NOIR)

install : Twist clockwise
uninstall : Twist counterclockwise

