

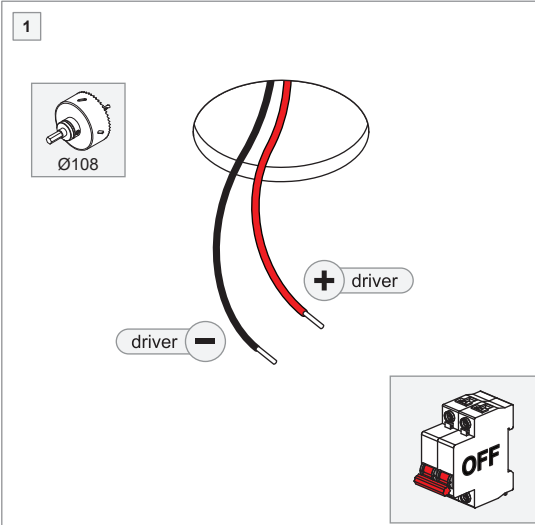
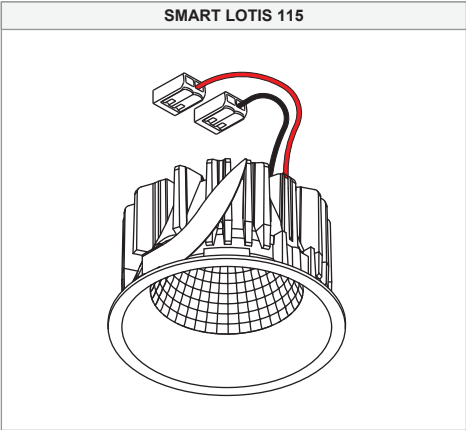
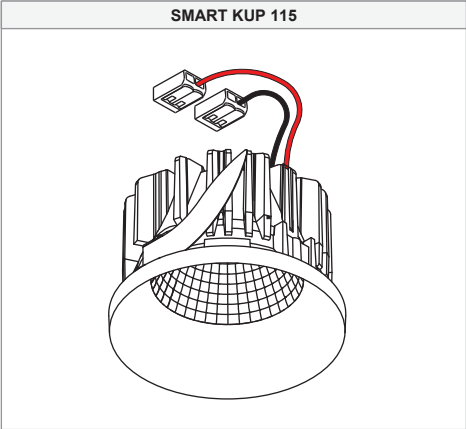
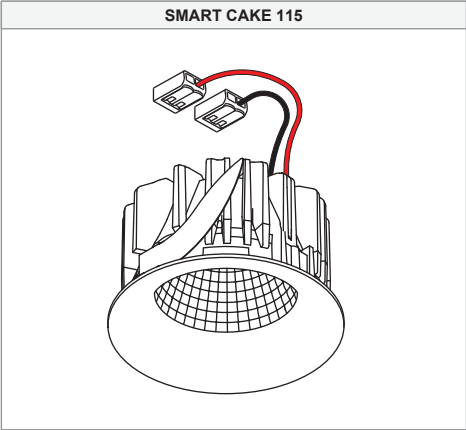


Smart Cake/Kup/Lotis 115 LED DE


127400XX_127401XX_127402XX_127410XX_127411XX_127412XX_127413XX_127414XX_127415XX_127416XX_127417XX_127418XX_127500XX_127501XX_127502XX_127510XX_127511XX_127512XX_127513XX_127514XX_127515XX_127516XX_127517XX_127518XX_127600XX_127601XX_127602XX_127610XX_127611XX_127612XX_127613XX_127614XX_127615XX_127616XX_127617XX_127618XX

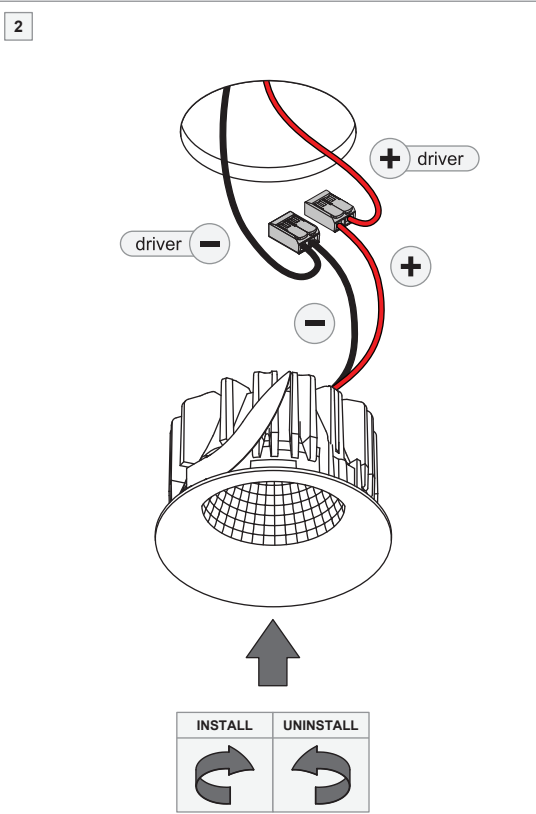

ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	29,1	33,7	11,0
500	29,9	34,7	16,2
700	31,0	35,8	23,4
 RED		 BLACK	
For serial connection, respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.			



⚠ SERIAL CONNECTION:

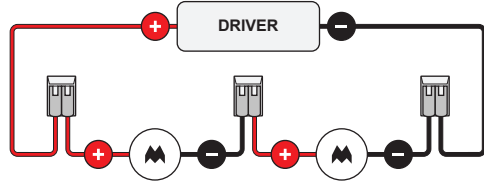

Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!



LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

