


Date
Customer
Project
Type

SLD25 Wall

Formerly SL Nano, SLD25 is our narrowest U-shaped profile. SLD25 poly out, available with a PMMA diffuser on the outside, guarantees a light-filling effect in any room. Available with LEDs. Suitable for surface mounting on the wall or ceiling, also works wonders as a suspended luminaire.



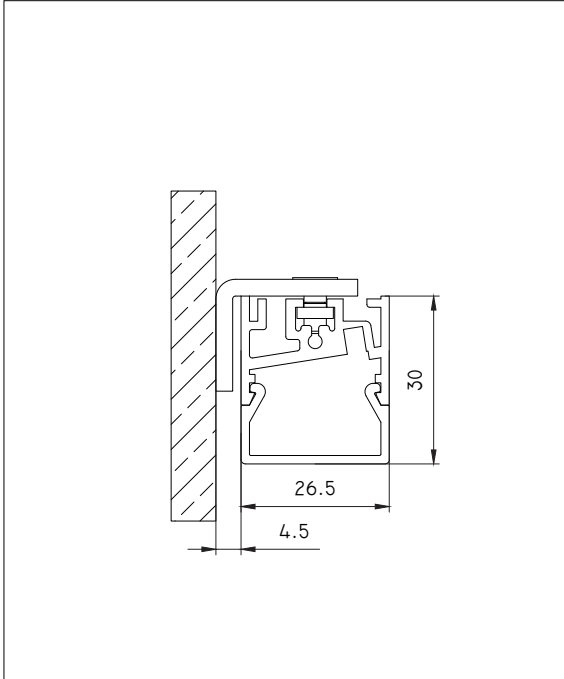

Base Profile

Dimensions	30mm x 26,5mm (h x w)
Base thickness	2mm
Mounting	Wall
Indoor/Outdoor	Indoor
Finish (RAL finish available on request)	Brushed anodised: bronze, champagne, silver bronze Fine structured scratch resistant powder coating: black, white
IP rating	IP20
Glow Wire Test	960°
CRI	90+
Warranty	5 years
Remark	Recommended installation height 185 cm

Diffusor

Type	PMMA (poly out)
------	-----------------

Lighting Modules

Linear Lighting module


LED type	LED strip 24V
Colour temperature	2700K, 3000K, 4000K
Dimming	Non-dimmable, 1-10V, 0-10V, Dali/Pushdim

Finish Information

(RAL finish available on request)




silver bronze
(brushed anodised)




bronze
(brushed anodised)



champagne
(brushed anodised)




white structure
(powder coating)




black structure
(powder coating)

Base Profile




- 93441209** SLD25 PROFILE WHITE STRUC/M
- 93441232** SLD25 PROFILE BLACK STRUC/M
- 93441241** SLD25 PROFILE ANO CHAMPAGNE/M
- 93441282** SLD25 PROFILE ANO BRONZE/M
- 93441284** SLD25 PROFILE ANO SILVER BRONZE/M

Diffuser




- 93440003** SLD25 DIFFUSER OUT/M

Endplate




- 93448118** SLD25 ENDPLATE BRONZE
- 93448117** SLD25 ENDPLATE CHAMPAGNE
- 93448106** SLD25 ENDPLATE SILVER BRONZE
- 93448181** SLD25 ENDPLATE BLACK STRUC
- 93449181** SLD25 ENDPLATE WHITE STRUC


Connection



- 93440050** SLD25 CONNECTION 180°




- 93440060** SLD25 CONNECTION 90°




- 93440504** SLD25 LEDSTRIP 24V CONNECTION WALL


Fixation / Mounting



- 93440861** SLD25 LATERAL WALL BRACK BLSTR
- 93440961** SLD25 LATERAL WALL BRACK WHSTR



- 93000999** SLD25 SURFACE FIXATION HOLE



Linear LED Strip 24V

1000lm/m

	2700K	3000K	4000K
mounted/m	93000540	93000541	93000542

2000lm/m

	2700K	3000K	4000K
mounted/m	93000004	93000005	93000006

Lamp type	LED STRIP - diffuser included		
		1000lm/m	2000lm/m
Delivered lumens	2700K	794lm/m	1390lm/m
	3000K	847lm/m	1420lm/m
	4000K	770lm/m	1352lm/m
Connected load	2700K	10.8W/m	18.9W/m
	3000K	10.8W/m	18.9W/m
	4000K	9.6W/m	16.6W/m
Efficacy	2700K	74lm/W	74lm/W
	3000K	78lm/W	75lm/W
	4000K	80lm/W	81lm/W
Binning	3SDCM		
Lifetime	L80 B10 @50000hrs		

DRIVERS

12405830	LED GEAR 24V 20W
12405930	LED GEAR 24V 120W
12405030	LED GEAR 24V 150W
12402030	LED GEAR 24V 20W 1-10V
12409730	LED DRIVER 24V 60W NON-DIM/0/1-10V
12409830	LED DRIVER 24V 100W NON-DIM/0/1-10V
12409930	LED DRIVER 24V 150W NON-DIM/0/1-10V
13550830	LED GEAR 24V 100W PUSHDIM/DALI
13550930	LED GEAR 24V 150W PUSHDIM/DALI