

Date
Customer
Project
Type

Drupl70 Surface


With a name inspired by the effects of sunlight through droplets of water, this luminaire's high-quality light and anti-glare qualities are key to comfort and productivity in professional settings. Drupl is the perfect solution for office-compliant continuous lighting, around the working space as well as on the ceiling. Drupl combines the benefits of unique optical lenses and highly-performant LEDs with elegant design. Create a uniform light expression in your space with general light down and soft light up.



DRUPL70 SURFACE




DRUPL70 STRAIGHT

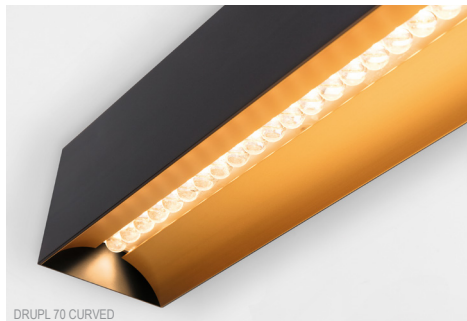


DRUPL70 CURVED




DRUPL70 SHARP

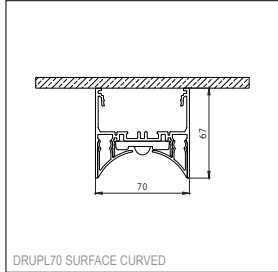

DRUPL70 SURFACE CURVED

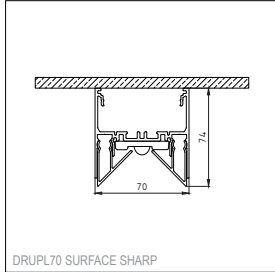

DRUPL70 SURFACE SHARP

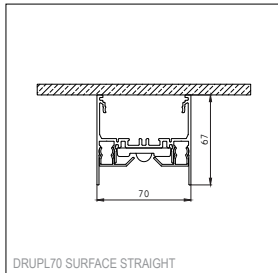

DRUPL70 SURFACE STRAIGHT

Base Profile

Dimensions	67mm x 70mm (h x w)
Base thickness	1.5mm
Mounting	Ceiling
Indoor/Outdoor	Indoor
Finish (RAL finish available on request)	Fine structured scratch resistant powder coating: white structure, black structure Brushed anodised: black matt
IP rating	IP20
Glow Wire Test	960°
CRI	90+
Warranty	5 years

Profile Cover

Finish	Fine structured scratch resistant powder coating: white structure, black structure Brushed anodised: gold, black matt
--------	---

Lenses

Type	PMMA
------	------

Lighting Modules

Linear Lighting

LED type	High power LED line
Colour temperature	2700K, 3000K, 4000K
Dimming	Non-dimmable, Dali/Pushdim Flicker-free (AM dimming)

Finish Information


(RAL finish available on request)



black structure
(powder coating)



black matt
(brushed anodised)




white structure
(powder coating)




gold
(brushed anodised)

Base Profile




- 93540032** DRUPL 70 BASE BLACK STRUC/M
- 93540083** DRUPL 70 BASE BLACK MATT/M
- 93540009** DRUPL 70 BASE WHITE STRUC/M


Profile Cover



- 93540246*** DRUPL 70 CURVED COVER GOLD/M
- 93540232*** DRUPL 70 CURVED COVER BLACK STRUC/M
- 93540283*** DRUPL 70 CURVED COVER BLACK MATT/M
- 93540209*** DRUPL 70 CURVED COVER WHITE STRUC/M




- 93540346*** DRUPL 70 SHARP COVER GOLD/M
- 93540332*** DRUPL 70 SHARP COVER BLACK STRUC/M
- 93540383*** DRUPL 70 SHARP COVER BLACK MATT/M
- 93540309*** DRUPL 70 SHARP COVER WHITE STRUC/M




- 93540446*** DRUPL 70 STRAIGHT COVER GOLD/M
- 93540432*** DRUPL 70 STRAIGHT COVER BLACK STRUC/M
- 93540483*** DRUPL 70 STRAIGHT COVER BLACK MATT/M
- 93540409*** DRUPL 70 STRAIGHT COVER WHITE STRUC/M

Endplate




- 93543181** DRUPL 70 ENDPLATE LOW BLACK STRUC
- 93541183** DRUPL 70 ENDPLATE LOW BLACK MATT
- 93549181** DRUPL 70 ENDPLATE LOW WHITE STRUC



- 93543182** DRUPL 70 ENDPLATE HIGH BLACK STRUC
- 93543183** DRUPL 70 ENDPLATE HIGH BLACK MATT
- 93549182** DRUPL 70 ENDPLATE HIGH WHITE STRUC

Connection




- 93540050** DRUPL 70 CONNECTION 180°


Fixation / Mounting

- 93540162** DRUPL 70 SURFACE FIXATION HOLE

Electrical Supply



- 93540163** DRUPL70 HOLE FOR POWER SUPPLY 3-5P




- 93540164** DRUPL70 HOLE FOR POWER SUPPLY 6-9P

* Should be ordered for both sides

Supplement

93540010	DRUPL 70 RAL SUPPL. BASE/M
93540215	DRUPL 70 RAL SUPPL. CURVED COVER/M
93540188	DRUPL 70 RAL SUPPL. ENDPLATE
93540315	DRUPL 70 RAL SUPPL. SHARP COVER/M
93540415	DRUPL 70 RAL SUPPL. STRAIGHT COVER/M
93000101	DRUPL 70 RAL SET UP CHARGE

* Should be ordered for both sides



NON-DIM	-3-----
DALI/PUSHDIM	-8-----

Linear LED Fortimo LEDline DI

	2700K	3000K	4000K	Module length (mm)	Lens 80°	Lens 120°
2x	9X544502	9X544002	9X544102	560	93540016*	93540018*
3x	9X544503	9X544003	9X544103	840		
4x	9X544504	9X544004	9X544104	1120		
5x	9X544505	9X544005	9X544105	1400		
6x**	9X544506	9X544006	9X544106	1680		
7x**	9X544507	9X544007	9X544107	1960		

Lamp type	MED POWER LED
Delivered lumens**	3499lm/m (2700K) 3596lm/m (3000K) 3705lm/m (4000K)
Connected load**	24,8W/m (2700K, 3000K, 4000K)
Efficacy**	141lm/W (2700K) 145lm/W (3000K) 149lm/W (4000K)
UGR**	18
Binning	3SDCM
Lifetime	L80 B10 @50000hrs.

SUPPLEMENTS

93541000* PROFILE EMERGENCY PACK 3H

*only for 2700K, 3000K, 4000K in 6x and 7x

**values for lens 80°, white sharp cover, calculated via 5x LEDline

Technical values for straight cover white struc - 3000K

* Lens required: ordered quantity must be accoring to number of ledlines

** Emergency available for 6x en 7x