



Nomad 111 2X LED GE

120230XX_B1

1



Electrical specs 2 lamps

ELECTRICAL SPECS LED-FIXTURE


Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	56,6	65,8	21,4
500	58	67,2	31,4
700	59,4	69	45

+ RED **-** BLACK


For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

2


RED +
BLACK -

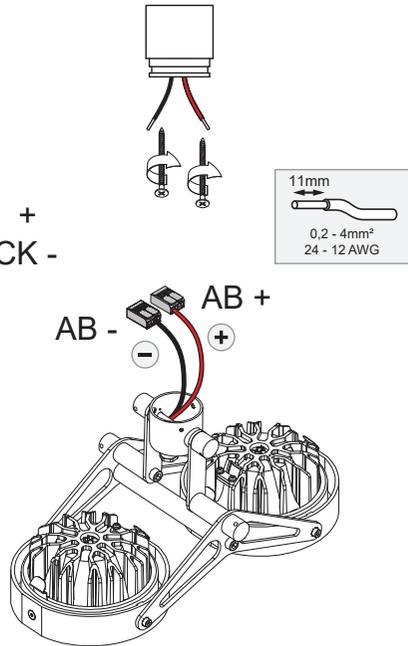

3

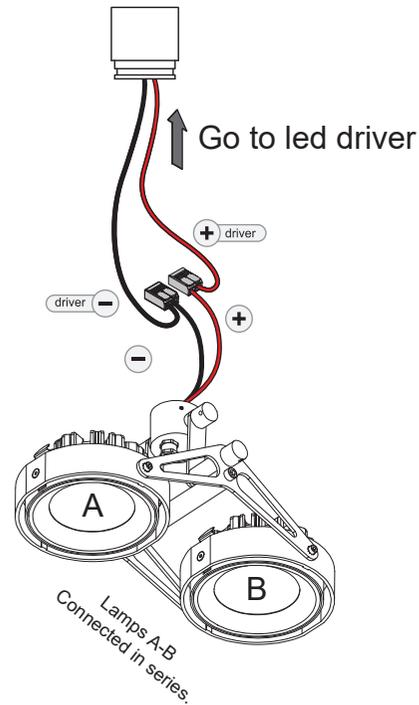

4

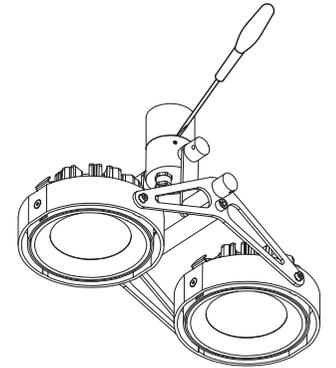

Replace protective shield when broken. The luminaire shall only be used complete with its protective shield. Reference number: 1009392



LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

NOT FOR 12V TRANSFORMER

