
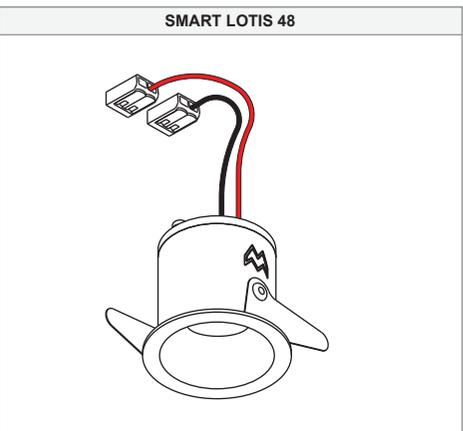
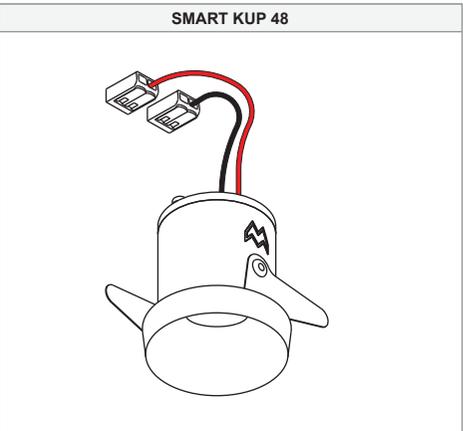


Smart Cake/Kup/Lotis 48 LED DE

128600XX-B1_128601XX-B1_128602XX-B1_128700XX-B1_128701XX-B1_128702XX-B1_128800XX-B1_128801XX-B1_128802XX-B1

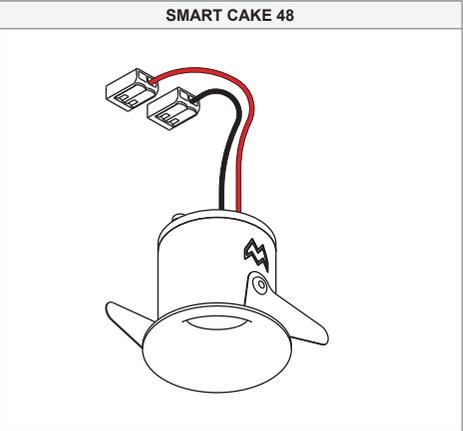

1


driver - + driver

Ø44
gips/gypsum/gypse/gips/yeso/gesso/rinc

Ø46
hout/wood/bois/Holz/madera/legno/древесины

ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	2,7	3,3	1,00
500	2,7	3,3	1,45
+ RED		- BLACK	

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

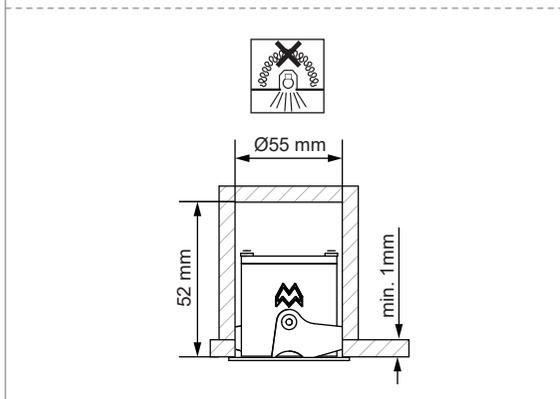


2

driver - + driver

driver - + driver

INSTALL UNINSTALL

3

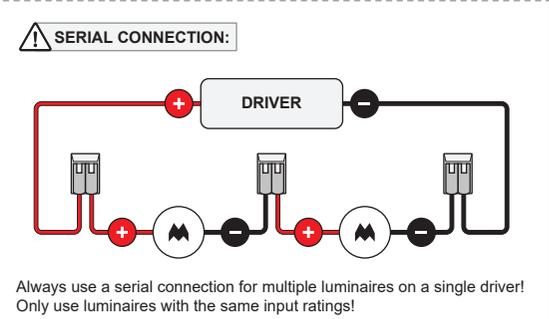

⚡ LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source and/or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

⚡ ESD PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.