



## *Drupl70 Suspended*


With a name inspired by the effects of sunlight through droplets of water, this luminaire's high-quality light and anti-glare qualities are key to comfort and productivity in professional settings. Drupl is the perfect solution for office-compliant continuous lighting, around the working space as well as on the ceiling. Drupl combines the benefits of unique optical lenses and highly-performant LEDs with elegant design. Create a uniform light expression in your space with general light down and soft light up.

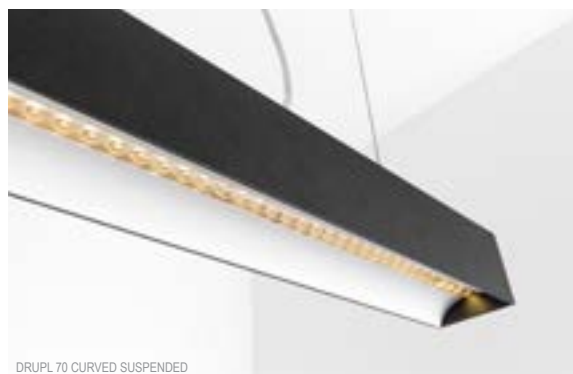


## Drupl70 Suspended

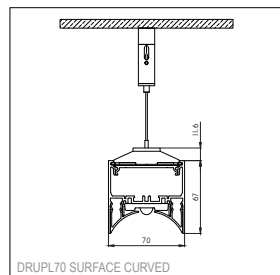

DRUPL70 SURFACE CURVED

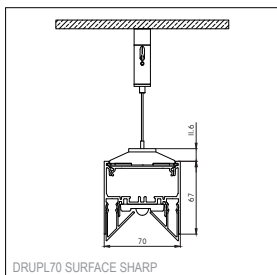

DRUPL70 SURFACE SHARP



DRUPL70 SURFACE STRAIGHT

### Base Profile

|                                             |                                                                                                                       |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Dimensions                                  | 67mm x 70mm (h x w)                                                                                                   |
| Base thickness                              | 1.5mm                                                                                                                 |
| Mounting                                    | Ceiling                                                                                                               |
| Indoor/Outdoor                              | Indoor                                                                                                                |
| Finish<br>(RAL finish available on request) | Fine structured scratch resistant powder coating:<br>white structure, black structure<br>Brushed anodised: black matt |
| IP rating                                   | IP20                                                                                                                  |
| Glow Wire Test                              | 960°                                                                                                                  |
| CRI                                         | 90+                                                                                                                   |
| Warranty                                    | 5 years                                                                                                               |

### Profile Cover

|        |                                                                                                                             |
|--------|-----------------------------------------------------------------------------------------------------------------------------|
| Finish | Fine structured scratch resistant powder coating:<br>white structure, black structure<br>Brushed anodised: gold, black matt |
|--------|-----------------------------------------------------------------------------------------------------------------------------|

### Lenses

|      |      |
|------|------|
| Type | PMMA |
|------|------|

### Lighting Modules

#### Linear Lighting

|                    |                            |
|--------------------|----------------------------|
| LED type           | High power LED line        |
| Colour temperature | 2700K, 3000K, 4000K        |
| Dimming            | Non-dimmable, Dali/Pushdim |

### Finish Information


(RAL finish available on request)



black structure  
(powder coating)



black matt  
(brushed anodised)




white structure  
(powder coating)




gold  
(brushed anodised)

## Base Profile




- 93540032** DRUPL 70 BASE BLACK STRUC/M  
**93540083** DRUPL 70 BASE BLACK MATT/M  
**93540009** DRUPL 70 BASE WHITE STRUC/M




- 93540132** DRUPL 70 TOPCOVER BLACK STRUC/M  
**93540183** DRUPL 70 TOPCOVER BLACK MATT/M  
**93540109** DRUPL 70 TOPCOVER WHITE STRUC/M


## Profile Cover



- 93540246\*** DRUPL 70 CURVED COVER GOLD/M  
**93540232\*** DRUPL 70 CURVED COVER BLACK STRUC/M  
**93540283\*** DRUPL 70 CURVED COVER BLACK MATT/M  
**93540209\*** DRUPL 70 CURVED COVER WHITE STRUC/M




- 93540346\*** DRUPL 70 SHARP COVER GOLD/M  
**93540332\*** DRUPL 70 SHARP COVER BLACK STRUC/M  
**93540383\*** DRUPL 70 SHARP COVER BLACK MATT/M  
**93540309\*** DRUPL 70 SHARP COVER WHITE STRUC/M




- 93540446\*** DRUPL 70 STRAIGHT COVER GOLD/M  
**93540432\*** DRUPL 70 STRAIGHT COVER BLACK STRUC/M  
**93540483\*** DRUPL 70 STRAIGHT COVER BLACK MATT/M  
**93540409\*** DRUPL 70 STRAIGHT COVER WHITE STRUC/M

## Endplate




- 93543181** DRUPL 70 ENDPLATE LOW BLACK STRUC  
**93541183** DRUPL 70 ENDPLATE LOW BLACK MATT  
**93549181** DRUPL 70 ENDPLATE LOW WHITE STRUC



- 93543182** DRUPL 70 ENDPLATE HIGH BLACK STRUC  
**93543183** DRUPL 70 ENDPLATE HIGH BLACK STRUC  
**93549182** DRUPL 70 ENDPLATE HIGH WHITE STRUC


## Connection




- 93540050** DRUPL 70 CONNECTION 180°

\* Should be ordered for both sides


**Fixation / Mounting**



- 93540583** DRUPL 70 CONNECTION COVER FOR SUSP BLACK MATT  
**93540532** DRUPL 70 CONNECTION COVER FOR SUSP BLSTR  
**93540509** DRUPL 70 CONNECTION COVER FOR SUSP WHSTR




- 93540850** DRUPL 70 SUSPENSION BLACK STRUC  
**93540950** DRUPL 70 SUSPENSION WHITE STRUC




- 93001132** HINGE FOR HIGH CONE BLACK STRUC  
**93001109** HINGE FOR HIGH CONE WHITE STRUC


**Electrical Supply**




- 93540163** DRUPL70 HOLE FOR POWER SUPPLY 3-5P




- 93540164** DRUPL70 HOLE FOR POWER SUPPLY 6-9P




- 93003203** POWER FEED KIT 2M 3X1.5MM² BLACK STRUC  
**93002903** POWER FEED KIT 2M 3X1.5MM² WHITE STRUC  
**93003205** POWER FEED KIT 2M 5X1.5 BLACK STRUC  
**93002905** POWER FEED KIT 2M 5X1.5MM² WHITE STRUC  
**93003305** POWER FEED KIT 2M 6X0.75 BLACK STRUC  
**93003304** POWER FEED KIT 2M 6X0.75 WHITE STRUC



- 93003908** POWER FEED KIT 2M 9X0.75MM² BLACK STRUC  
**93003907** POWER FEED KIT 2M 9X0.75MM² WHITE STRUC




- 93003151** CONNECTION BOX 3P FOR TRANSPARANT CABLE BLACK STRUC  
**93002951** CONNECTION BOX 3P FOR TRANSPARANT CABLE WHITE STRUC  
**93003251** CONNECTION BOX 5P FOR TRANSPARANT CABLE BLACK STRUC  
**93003951** CONNECTION BOX 5P FOR TRANSPARANT CABLE WHITE STRUC  
**93003651** CONNECTION BOX 6P FOR TRANSPARENT CABLE BLACK STRUC  
**93003551** CONNECTION BOX 6P FOR TRANSPARENT CABLE WHITE STRUC




- 93005251** CONNECTION BOX 9P FOR TRANSPARENT CABLE BLACK STRUC  
**93005151** CONNECTION BOX 9P FOR TRANSPARENT CABLE WHITE STRUC

## *Drupl70 Suspended*



|                 |                                            |
|-----------------|--------------------------------------------|
| <b>93002152</b> | TRANSPARANT CABLE 3X1.5MM <sup>2</sup> /M  |
| <b>93002252</b> | TRANSPARANT CABLE 5X1.5MM <sup>2</sup> /M  |
| <b>93003452</b> | TRANSPARANT CABLE 6X0.75MM <sup>2</sup> /M |
| <b>93003552</b> | TRANSPARANT CABLE 9X0.75MM <sup>2</sup> /M |

## Drupl70 Suspended



|              |         |
|--------------|---------|
| NON-DIM      | -3----- |
| DALI/PUSHDIM | -8----- |

### Linear LED Fortimo LEDline DI

|      | 2700K    | 3000K    | 4000K    | Module length (mm) | Lens 80°  | Lens 120° |
|------|----------|----------|----------|--------------------|-----------|-----------|
| 2x   | 9X544502 | 9X544002 | 9X544102 | 560                | 93540016* | 93540018* |
| 3x   | 9X544503 | 9X544003 | 9X544103 | 840                |           |           |
| 4x   | 9X544504 | 9X544004 | 9X544104 | 1120               |           |           |
| 5x   | 9X544505 | 9X544005 | 9X544105 | 1400               |           |           |
| 6x** | 9X544506 | 9X544006 | 9X544106 | 1680               |           |           |
| 7x** | 9X544507 | 9X544007 | 9X544107 | 1960               |           |           |

### Linear LED Fortimo LEDline Preset 50% DI

|      | 2700K    | 3000K    | 4000K    | Module length (mm) | Lens 80°  | Lens 120° |
|------|----------|----------|----------|--------------------|-----------|-----------|
| 3x   | 9X546503 | 9X546003 | 9X546103 | 840                | 93540016* | 93540018* |
| 4x   | 9X546504 | 9X546004 | 9X546104 | 1120               |           |           |
| 5x   | 9X546505 | 9X546005 | 9X546105 | 1400               |           |           |
| 6x** | 9X546506 | 9X546006 | 9X546106 | 1680               |           |           |
| 7x** | 9X546507 | 9X546007 | 9X546107 | 1960               |           |           |

|                   |                                             |
|-------------------|---------------------------------------------|
| Lamp type         | MED POWER LED                               |
| Delivered lumens* | 3273lm/m (LENS 80°)<br>3049lm/m (LENS 120°) |
| Connected load*   | 34W/m                                       |
| Efficacy*         | 96lm/W (LENS 80°)<br>90lm/W (LENS 120°)     |
| UGR*              | 18 (LENS 80°)<br>24 (LENS 120°)             |
| Binning           | 3SDCM                                       |
| Lifetime          | L80 B10 @50000hrs.                          |

|                  |                                             |
|------------------|---------------------------------------------|
| Lamp type        | MED POWER LED                               |
| Delivered lumens | 1518lm/m (LENS 80°)<br>1414lm/m (LENS 120°) |
| Connected load   | 4,3W/ledline                                |
| Efficacy         | 84lm/W (LENS 80°)<br>79lm/W (LENS 120°)     |
| UGR              | 16 (LENS 80°)<br>21 (LENS 120°)             |
| Binning          | 3SDCM                                       |
| Lifetime         | L80 B10 @50000hrs.                          |

#### SUPPLEMENTS

93541000\* PROFILE EMERGENCY PACK 3H


\*only for 2700K, 3000K, 4000K in 6x and 7x

Technical values for straight cover white struc - 3000K

\* Lens required: ordered quantity must be according to number of ledlines

\*\* Emergency available for 6x en 7x

Drupl70 Suspended



Linear LED Strip 24V Uplight

1000lm/m

|           |          |          |          |
|-----------|----------|----------|----------|
|           | 2700K    | 3000K    | 4000K    |
| mounted/m | 93000044 | 93000045 | 93000046 |

2000lm/m

|           |          |          |          |
|-----------|----------|----------|----------|
|           | 2700K    | 3000K    | 4000K    |
| mounted/m | 93000029 | 93000030 | 93000031 |

|                  |                               |          |          |
|------------------|-------------------------------|----------|----------|
| Lamp type        | LED STRIP - diffuser included |          |          |
|                  | 1000lm/m                      | 2000lm/m |          |
| Delivered lumens | 2700K                         | 961lm/m  | 1507lm/m |
|                  | 3000K                         | 1137lm/m | 1695lm/m |
|                  | 4000K                         | 1094lm/m | 1702lm/m |
| Connected load   | 2700K                         | 14.4W/m  | 14.4W/m  |
|                  | 3000K                         | 14.4W/m  | 14.4W/m  |
|                  | 4000K                         | 14.4W/m  | 14.4W/m  |
| Efficacy         | 2700K                         | 67lm/W   | 105lm/W  |
|                  | 3000K                         | 79lm/W   | 118lm/W  |
|                  | 4000K                         | 76lm/W   | 118lm/W  |
| Binning          | 3SDCM                         |          |          |
| Lifetime         | L80 B10 @50000hrs.            |          |          |

DRIVERS

|          |                                  |
|----------|----------------------------------|
| 93009520 | LED DRIVER 24V 60W               |
| 93009552 | LED DRIVER 24V 100W              |
| 96009520 | LED DRIVER 24V 60W 1-10V         |
| 98009520 | LED DRIVER 24V 100W DALI/PUSHDIM |

SUPPLEMENTS

|          |                          |
|----------|--------------------------|
| 93541001 | LED STRIP 24V CONNECTION |
|----------|--------------------------|