

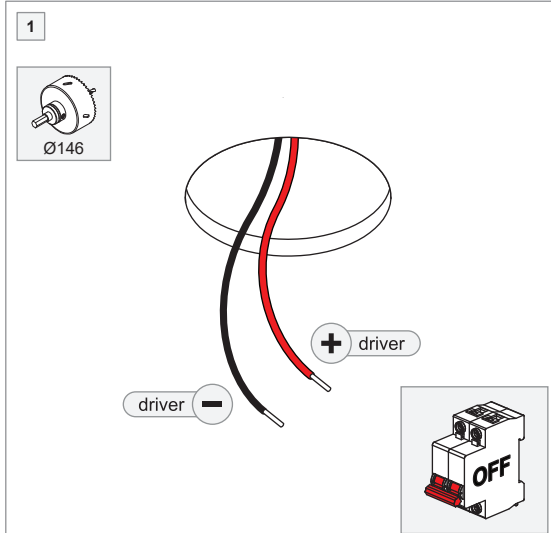
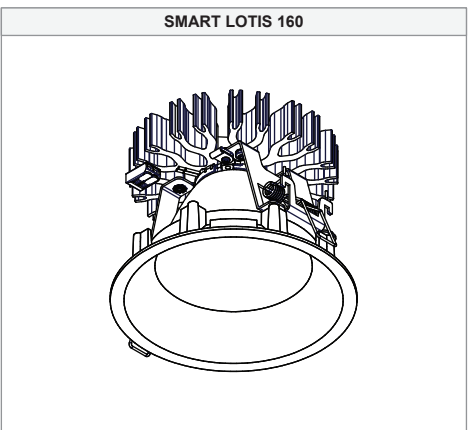
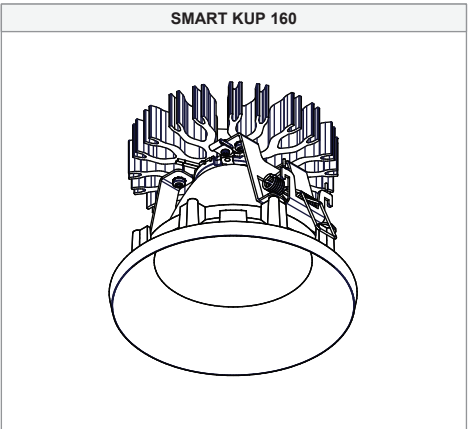
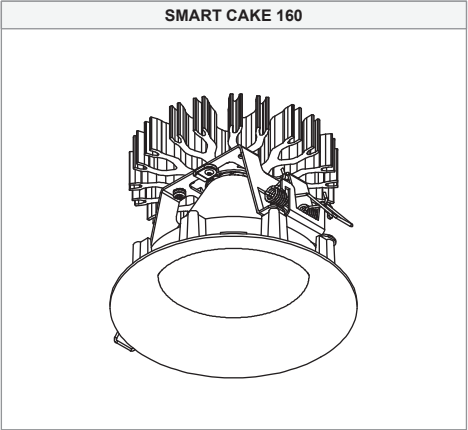
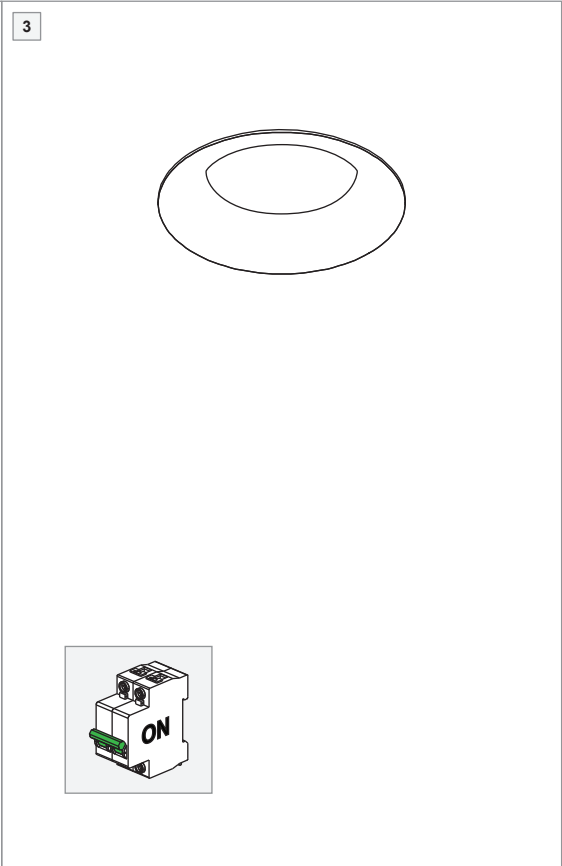
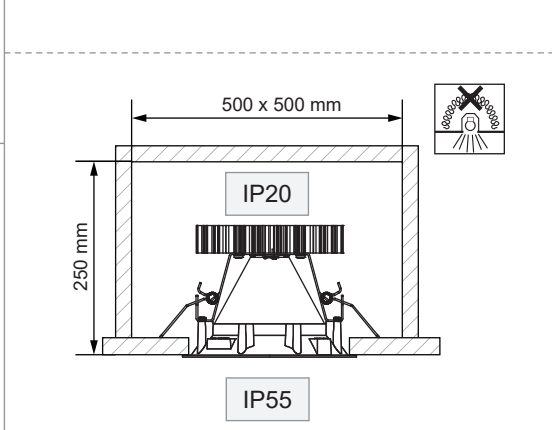


Smart Cake/Kup/Lotis 160 (diffuse) IP55 LED DE

130040XX_130041XX_130042XX_130043XX_130044XX_130045XX_130046XX_130047XX_130048XX_130050XX_130051XX_130052XX_130140XX_130141XX_130142XX_130143XX_130144XX_130146XX_130145XX_130147XX_130148XX_130150XX_130152XX_130151XX_130160XX_130161XX_130162XX_130240XX_130241XX_130242XX_130243XX_130244XX_130245XX_130246XX_130247XX_130248XX_130250XX_130251XX_130252XX_130260XX_130261XX_130262XX

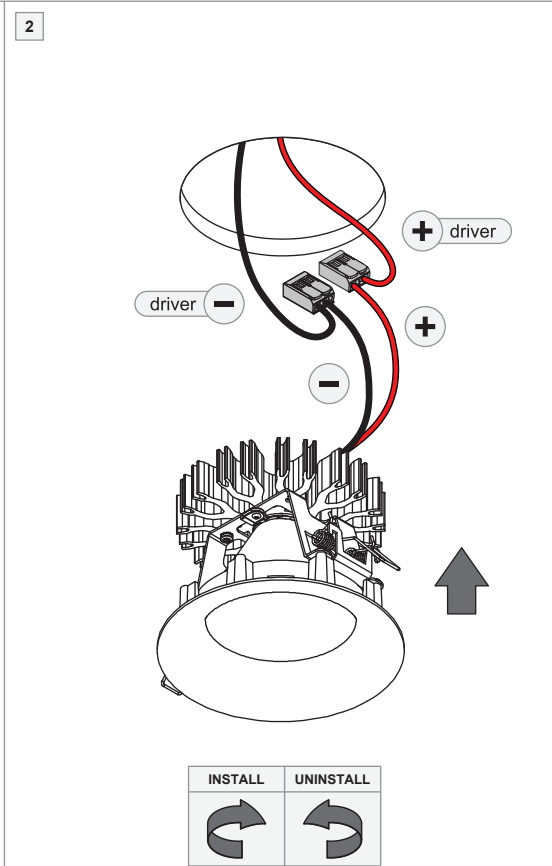

ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
500	30,6	35,4	16,3
700	31,2	36,0	23,3
900	31,8	36,6	30,5
1050	32,1	37,1	36,1
1200	32,5	37,5	41,8
1400	33,0	38,0	49,5
+ RED		- BLACK	
For serial connection, respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.			

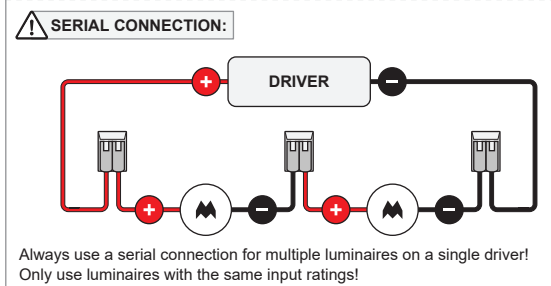

Replace protective shield when broken. The luminaire shall only be used complete with its protective shield. Reference number: 1011467

LIGHT SOURCE - DO NOT TOUCH LED
Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

PREVENTING ELECTROSTATIC DAMAGE
A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.