

Date

Customer

Project


Type

## *SLD25 Suspended*


Formerly SL Nano, SLD25 is our narrowest U-shaped profile. SLD25 poly out, available with a PMMA diffuser on the outside, guarantees a light-filling effect in any room. Available with LEDs. Suitable for surface mounting on the wall or ceiling, also works wonders as a suspended luminaire.



SLD25 SUSPENDED - BRONZE

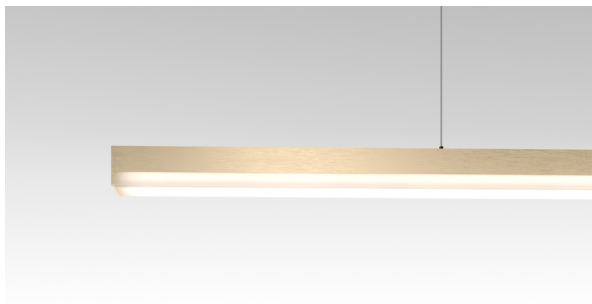


SLD25 SUSPENDED - CHAMPAGNE

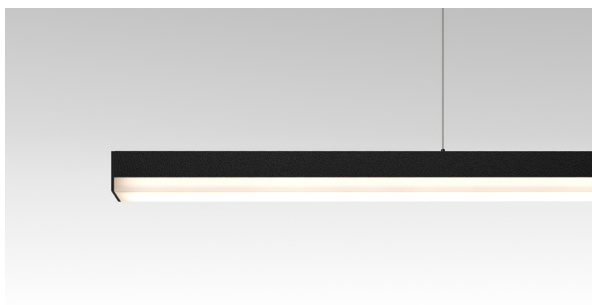

SLD25 SUSPENDED - BLACK STRUCTURE



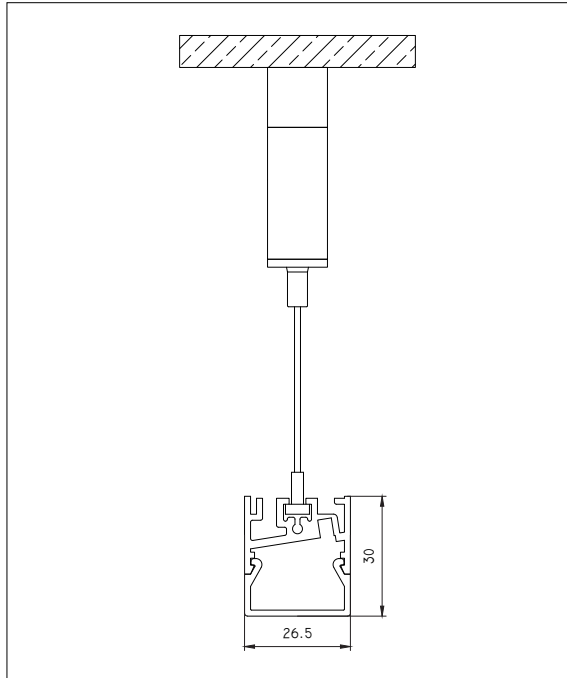

**Base Profile**

Dimensions	30mm x 26,5mm (h x w)
Base thickness	2mm
Mounting	Ceiling
Indoor/Outdoor	Indoor
Finish (RAL finish available on request)	Brushed anodised: bronze, champagne, silver bronze Fine structured scratch resistant powder coating: black, white
IP rating	IP20
Glow Wire Test	960°
CRI	90+
Warranty	5 years

**Diffusor**

Type	PMMA (poly out)
------	-----------------

**Lighting Modules**


**Linear Lighting module**

LED type	LED strip 24V
Colour temperature	2700K, 3000K, 4000K
Dimming	Non-dimmable, 1-10V, 0-10V, Dali/Pushdim


SLD25

**Finish Information**

(RAL finish available on request)




silver bronze  
(brushed anodised)




bronze  
(brushed anodised)



champagne  
(brushed anodised)




white structure  
(powder coating)




black structure  
(powder coating)

**Base Profile**




- 93441209** SLD25 PROFILE WHITE STRUC/M
- 93441232** SLD25 PROFILE BLACK STRUC/M
- 93441241** SLD25 PROFILE ANO CHAMPAGNE/M
- 93441282** SLD25 PROFILE ANO BRONZE/M
- 93441284** SLD25 PROFILE ANO SILVER BRONZE/M


**Connection**



- 93440050** SLD25 CONNECTION 180°




- 93440060** SLD25 CONNECTION 90°




- 93440506** SLD25 LEDSTRIP 24V CONNECTION SUSP

**Diffuser**




- 93440003** SLD25 DIFFUSER OUT/M

**Endplate**




- 93448118** SLD25 ENDPLATE BRONZE
- 93448117** SLD25 ENDPLATE CHAMPAGNE
- 93448106** SLD25 ENDPLATE SILVER BRONZE
- 93448181** SLD25 ENDPLATE BLACK STRUC
- 93449181** SLD25 ENDPLATE WHITE STRUC

**Fixation / Mounting**




- 93000450** SUSPENSION 4M TYPE 2 ALU
- 93000851** SUSPENSION TYPE 2 BLACK STRUC
- 93000850** SUSPENSION TYPE 2 WHITE STRUC




- 93001105** HINGE FOR HIGH CONE ALU
- 93001132** HINGE FOR HIGH CONE BLACK STRUC
- 93001109** HINGE FOR HIGH CONE WHITE STRUC


**Electrical Supply**




- 93003003** POWER FEED KIT 2M 3X0.75MM<sup>2</sup> ALU
- 93003902** POWER FEED KIT 2M 3X0.75MM<sup>2</sup> BLACKSTRUC
- 93003903** POWER FEED KIT 2M 3X0.75MM<sup>2</sup> WHITE STRUC



- 93002151** CONNECTION BOX 3P FOR TRANSPARANT CABLE ALU
- 93003151** CONNECTION BOX 3P FOR TRANSPARANT CABLE BLACK STRUC
- 93002951** CONNECTION BOX 3P FOR TRANSPARANT CABLE WHITE STRUC



- 93003152** TRANSPARANT CABLE 3X0.75MM<sup>2</sup>/M



### Linear LED Strip 24V

1000lm/m

	2700K	3000K	4000K
mounted/m	93000540	93000541	93000542

2000lm/m


	2700K	3000K	4000K
mounted/m	93000004	93000005	93000006

Lamp type	LED STRIP - diffuser included		
		1000lm/m	2000lm/m
Delivered lumens	2700K	794lm/m	1390lm/m
	3000K	847lm/m	1420lm/m
	4000K	770lm/m	1352lm/m
Connected load	2700K	10.8W/m	18.9W/m
	3000K	10.8W/m	18.9W/m
	4000K	9.6W/m	16.6W/m
Efficacy	2700K	74lm/W	74lm/W
	3000K	78lm/w	75lm/W
	4000K	80lm/W	81lm/W
Binning	3SDCM		
Lifetime	L80 B10 @50000hrs		

#### REMOTE DRIVERS

12405830	LED GEAR 24V 20W
12405930	LED GEAR 24V 120W
12405030	LED GEAR 24V 150W
12402030	LED GEAR 24V 20W 1-10V
12409730	LED DRIVER 24V 60W NON-DIM/0/1-10V
12409830	LED DRIVER 24V 100W NON-DIM/0/1-10V
12409930	LED DRIVER 24V 150W NON-DIM/0/1-10V
13550830	LED GEAR 24V 100W PUSHDIM/DALI
13550930	LED GEAR 24V 150W PUSHDIM/DALI

#### SURFACE MOUNTED DRIVERS



93009504	LED DRIVER CONSTANT VOLTAGE 24V SURFACE (FOR SUSPENDED MOUNTING) NON-DIM 100W WHITE STRUCTURE
93009505	LED DRIVER CONSTANT VOLTAGE 24V SURFACE (FOR SUSPENDED MOUNTING) NON-DIM 100W BLACK STRUCTURE
98009504	LED DRIVER CONSTANT VOLTAGE 24V SURFACE (FOR SUSPENDED MOUNTING) DALI/PUSH-DIM 100W WHITE STRUCTURE
98009505	LED DRIVER CONSTANT VOLTAGE 24V SURFACE (FOR SUSPENDED MOUNTING) DALI/PUSH-DIM 100W BLACK STRUCTURE