



Date	
Customer	
Project	
Туре	

Light lines are a beautiful way to highlight the architectural elements of a space. SLD35, formerly SL micro, can easily be your luminaire of choice for this effect. In fact, so can our entire SLD family. Available in ceiling mounted, suspended and recessed versions. SLD35 combined with IP44 ledstrip enables you to extend your light lines into damp indoor locations (such as bathrooms).





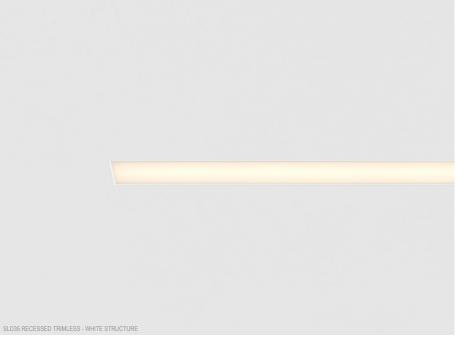



Base Profile SLD35 SLD35 IP Dimensions 35mm x 35mm (h x w) 58-75mm Mounting Depth Base thickness 2mm Mounting Ceiling, Wall Indoor/Outdoor Indoor Finish Anodised: aluminium Brushed anodised: bronze, champagne, silver bronze Fine structured scratch resistant powder coating: black, white

IP rating	IP20	IP44, only with IP44 flexible LED strip	
Glow Wire Test		960°	
CRI		90+	
Warranty		5 years	

Diffusor

Tyne	PMMA
Type	1 1411417 (

Lighting Modules

Linear LED Strip 24V

LED type	LED Strip
Colour temperature	2700K, 3000K, 4000K
Dimming	Non-dimmable, 1-10V, Dali/Pushdim

Linear LED Strip 24V IP44

LED type	LED Strip
Colour temperature	2700K, 3000K, 4000K
Dimming	Non-dimmable, 1-10V, 0-10V, Dali/Pushdim

Finish Information





champagne (brushed anodised)



black structure (powder coating)



(brushed anodised)



(brushed anodised)

white structure (powder coating)






93461305 SLD35 PROFILE ALU/M


93461309 SLD35 PROFILE WHITE STRUC/M
93461332 SLD35 PROFILE BLACK STRUC/M
93461341 SLD35 PROFILE ANO CHAMPAGNE/M
93461382 SLD35 PROFILE ANO BRONZE/M
93461384 SLD35 PROFILE ANO SILVER BRONZE/M





93460012 SLD35 DIFFUSER IN/M





 93460181
 SLD35 ENDPLATE ALU

 93468118
 SLD35 ENDPLATE BRONZE

 93468117
 SLD35 ENDPLATE CHAMPAGNE

 93468106
 SLD35 ENDPLATE SILVER BRONZE


 93468181
 SLD35 ENDPLATE BLACK STRUC

 93469181
 SLD35 ENDPLATE WHITE STRUC





93460050 SLD35 CONNECTION 180°




93460060 SLD35 CONNECTION 90°



93460996 SLD35 TRIMLESS BUILT-IN BRACKET





Linear LED Strip 24V

1000lm/m

	2700K	3000K	4000K
mounted/m	93000540	93000541	93000542

2000lm/m

	2700K	3000K	4000K
mounted/m	93000004	93000005	93000006

Lamp type LED STRIP - diffuser included 1000lm/m 2000lm/m Delivered lumens 2700K 652lm/m 1142lm/m 695lm/m 1166lm/m 3000K 4000K 632lm/m 1110lm/m Connected load 2700K 10.8W/m 18.9W/m 10.8W/m 18.9W/m 4000K 9.6W/m 16.6W/m Efficacy 2700K 60lm/W 60lm/W 3000K 64lm/w 62lm/W 4000K 66lm/W 67lm/W Binning 3SDCM L80 B10 @50000hrs. Lifetime

DRIVERS


12405830	LED GEAR 24V 20W
12402030	LED GEAR 24V 20W 1-10V
12409730	LED DRIVER 24V 60W NON-DIM/0/1-10V
12409830	LED DRIVER 24V 100W NON-DIM/0/1-10V
12409930	LED DRIVER 24V 150W NON-DIM/0/1-10V
12405930	LED DRIVER 24V 120W
12405030	LED DRIVER 24V 150W
13550930	LED DRIVER 24V 150W PUSHDIM/DALI
13550830	LED GEAR 24V 100W PUSHDIM/DALI

SUPPLEMENTS



93470507 SLD35 LEDSTRIP 24V CONNECTION REC





Linear LED Strip 24V IP44

1000lm/m

	2700K	3000K	4000K
mounted/m	93000013	93000014	93000015
not mounted (roll 5m)	93000016	93000017	93000018

2000lm/m

200011111111			
	2700K	3000K	4000K
mounted/m	93000047	93000048	93000049
not mounted (roll 5m)	93000026	93000027	93000028

Lamp type LED STRIP - diffuser included 1000lm/m 2000lm/m Delivered lumens 2700K 691lm/m 1507lm/m 691lm/m 1695lm/m 3000K 4000K 691lm/m 1702lm/m Connected load 2700K 14.4W/m 14.4W/m 14.4W/m 14.4W/m 4000K 14.4W/m 14.4W/m Efficacy 2700K 48lm/W 105lm/W 3000K 48lm/w 118lm/w 4000K 48lm/W 118lm/W Binning 3SDCM L80 B10 @50000hrs. Lifetime

DRIVERS

DIVIVEIVO	
12405830	LED GEAR 24V 20W
13551130	LED GEAR 24V 60W
13551230	LED GEAR 24V 100W
13551330	LED GEAR 24V 150W
12402030	LED GEAR 24V 20W 1-10V
12409730	LED GEAR 24V 60W 1-10V
12409830	LED GEAR 24V 100W 1-10V
12409930	LED GEAR 24V 150W 1-10V
12405930	LED DRIVER 24V 120W
12405030	LED DRIVER 24V 150W
13550930	LED DRIVER 24V 150W PUSHDIM/DALI
13550830	LED GEAR 24V 100W PUSHDIM/DALI

SUPPLEMENTS



93470507 SLD35 LEDSTRIP 24V CONNECTION REC