




TETRIX Straight 62 1xLED SPOT DE

137300XX\_137301XX\_137302XX

TETRIX Straight 62

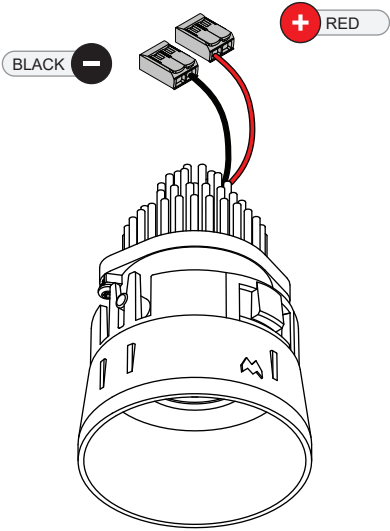


ELECTRICAL SPECS LED-FIXTURE


Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	11,2	13,2	4,1
500	11,2	13,2	6,1
 RED		 BLACK	
For serial connection, respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.			

SHOULD BE USED WITH

TETRIX frame round 74  
135100XX



TRIMLESS RING Ø62  
13515430

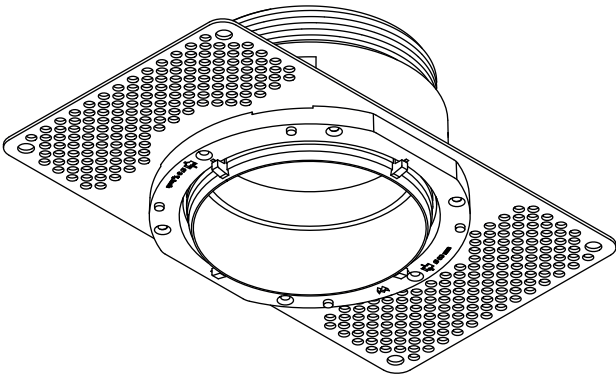


OPTICAL ACCESSORIES


HONEYCOMB Ø33  
13515132




SNOOT Ø32  
135150XX



LC Ø44  
135152XX



LC Ø64  
135153XX



LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check [www.supermodular.com](http://www.supermodular.com) or connect with your sales contact.