

Date
Customer
Project
Type

SLD35 Suspended

Light lines are a beautiful way to highlight the architectural elements of a space. SLD35, formerly SL micro, can easily be your luminaire of choice for this effect. In fact, so can our entire SLD family. Available in ceiling mounted, suspended and recessed versions.



SLD35 SUSPENDED - BRONZE




SLD35 SUSPENDED - BLACK STRUCTURE



SLD35 SUSPENDED - CHAMPAGNE



SLD35 SUSPENDED - SILVER BRONZE

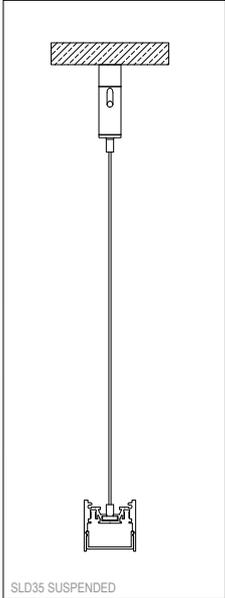

Base Profile

Dimensions	35mm x 35mm (h x w)
Base thickness	2mm
Mounting	Ceiling
Indoor/Outdoor	Indoor
Finish (RAL finish available on request)	Anodised: aluminium Brushed anodised: bronze, champagne, silver bronze Fine structured scratch resistant powder coating: black, white
IP rating	IP20
Glow Wire Test	960°
CRI	90+
Warranty	5 years

Diffusor

Type	PMMA
------	------

Lighting Modules

Linear LED Strip 24V

LED type	LED Strip
Colour temperature	2700K, 3000K, 4000K
Dimming	Non-dimmable, 1-10V, 0-10V, Dali/Pushdim

Finish Information

(RAL finish available on request)



aluminium
(anodised)



bronze
(brushed anodised)




champagne
(brushed anodised)



silver bronze
(brushed anodised)




black structure
(powder coating)




white structure
(powder coating)

Base Profile




- 93461305** SLD35 PROFILE ALU/M
- 93461309** SLD35 PROFILE WHITE STRUC/M
- 93461332** SLD35 PROFILE BLACK STRUC/M
- 93461341** SLD35 PROFILE ANO CHAMPAGNE/M
- 93461382** SLD35 PROFILE ANO BRONZE/M
- 93461384** SLD35 PROFILE ANO SILVER BRONZE/M

Diffuser




- 93460012** SLD35 DIFFUSER IN/M

Endplate




- 93460181** SLD35 ENDPLATE ALU
- 93468118** SLD35 ENDPLATE BRONZE
- 93468117** SLD35 ENDPLATE CHAMPAGNE
- 93468106** SLD35 ENDPLATE SILVER BRONZE
- 93468181** SLD35 ENDPLATE BLACK STRUC
- 93469181** SLD35 ENDPLATE WHITE STRUC

Connection




- 93460050** SLD35 CONNECTION 180°




- 93460060** SLD35 CONNECTION 90°


Fixation / Mounting




- 93000450** SUSPENSION 4M TYPE 2 ALU
- 93000851** SUSPENSION TYPE 2 BLACK STRUC
- 93000850** SUSPENSION TYPE 2 WHITE STRUC




- 93001105** HINGE FOR HIGH CONE ALU
- 93001132** HINGE FOR HIGH CONE BLACK STRUC
- 93001109** HINGE FOR HIGH CONE WHITE STRUC




- 93003003** POWER FEED KIT 2M 3X0.75MM² ALU
- 93003902** POWER FEED KIT 2M 3X0.75MM² BLACKSTRUC
- 93003903** POWER FEED KIT 2M 3X0.75MM² WHITE STRUC



- 93002151** CONNECTION BOX 3P FOR TRANSPARANT CABLE ALU
- 93003151** CONNECTION BOX 3P FOR TRANSPARANT CABLE BLACK STRUC
- 93002951** CONNECTION BOX 3P FOR TRANSPARANT CABLE WHITE STRUC



- 93003152** TRANSPARANT CABLE 3X0.75MM²/M



Linear LED Strip 24V

1000lm/m

	2700K	3000K	4000K
mounted/m	93000540	93000541	93000542

2000lm/m


	2700K	3000K	4000K
mounted/m	93000004	93000005	93000006

Lamp type	LED STRIP - diffuser included		
		1000lm/m	2000lm/m
Delivered lumens	2700K	652lm/m	1142lm/m
	3000K	695lm/m	1166lm/m
	4000K	632lm/m	1110lm/m
Connected load	2700K	10.8W/m	18.9W/m
	3000K	10.8W/m	18.9W/m
	4000K	9.6W/m	16.6W/m
Efficacy	2700K	60lm/W	60lm/W
	3000K	64lm/w	62lm/W
	4000K	66lm/W	67lm/W
Binning	3SDCM		
Lifetime	L80 B10 @50000hrs.		

REMOTE DRIVERS


12405830	LED GEAR 24V 20W
12402030	LED GEAR 24V 20W 1-10V
12409730	LED DRIVER 24V 60W NON-DIM/0/1-10V
12409830	LED DRIVER 24V 100W NON-DIM/0/1-10V
12409930	LED DRIVER 24V 150W NON-DIM/0/1-10V
12405930	LED DRIVER 24V 120W
12405030	LED DRIVER 24V 150W
13550930	LED DRIVER 24V 150W PUSHDIM/DALI
13550830	LED GEAR 24V 100W PUSHDIM/DALI

SUPPLEMENTS



93470506 SLD35 LEDSTRIP 24V CONNECTION SUSP

SURFACE MOUNTED DRIVERS



93009504	LED DRIVER CONSTANT VOLTAGE 24V SURFACE (FOR SUSPENDED MOUNTING) NON-DIM 100W WHITE STRUCTURE
93009505	LED DRIVER CONSTANT VOLTAGE 24V SURFACE (FOR SUSPENDED MOUNTING) NON-DIM 100W BLACK STRUCTURE
98009504	LED DRIVER CONSTANT VOLTAGE 24V SURFACE (FOR SUSPENDED MOUNTING) DALI/PUSH-DIM 100W WHITE STRUCTURE
98009505	LED DRIVER CONSTANT VOLTAGE 24V SURFACE (FOR SUSPENDED MOUNTING) DALI/PUSH-DIM 100W BLACK STRUCTURE