



LED Driver Trailing Edge 200-350mA 4-14W

13551930


WIRING DIAGRAM




⚠ SERIAL CONNECTION, RESPECT POLARITY

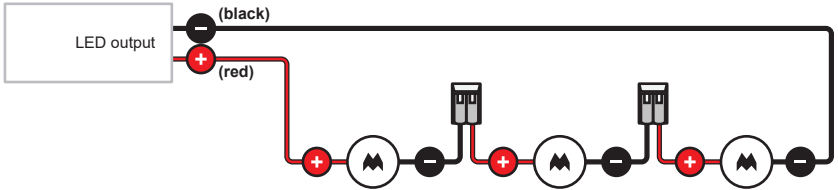

DIMENSIONS

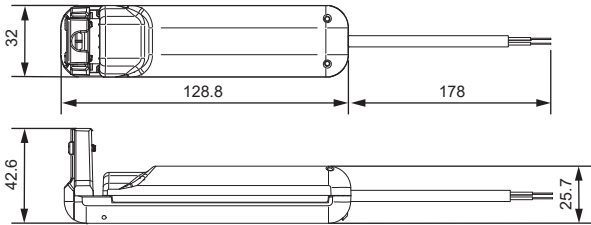

MINIMUM HEIGHT TO TILT IN DRIVER

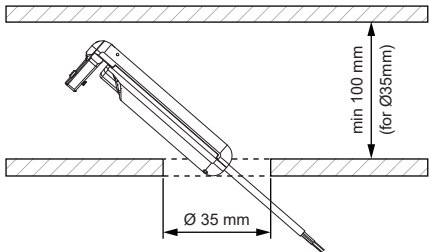

OPERATING WINDOW

|       |         |          |           |   |   |
|-------|---------|----------|-----------|---|---|
| 250mA | 5 - 14W | 20-40Vdc | ON<br>OFF | 1 | 2 |
| 350mA | 7 - 14W | 20-40Vdc | ON<br>OFF | 1 | 2 |

Important: Check dipswitch settings on driver before installation. Refer to fixture installation instruction for maximum drive current and set dipswitches accordingly.

OPERATING MODE

- Hybrid dimming (AM+PWM)

ELECTRICAL CHARACTERISTICS

NOMINAL INPUT VOLTAGE RANGE AC

220 - 240V

INPUT FREQUENCY RANGE

50...60HZ

DC OPERATING RANGE

None

MAXIMUM OUTPUT POWER

14W

TEMPERATURE

T<sub>c</sub> = 83°C

T<sub>a</sub> = -20...+45°C

EFFICIENCY AT FULL LOAD

>78%

TYPICAL CURRENT OUTPUT RIPPLE

≤ 5%

MAXIMUM DRIVERS ON MCB 16A TYPE B

80

Technical datasheet available on request

FIXTURES & ACCESSORIES

For latest version of driver matrix and available accessories check [www.supermodular.com](http://www.supermodular.com) or connect with your sales contact.

