



Passage Semi-Recessed Adjustable 40 1x LED DE


139600XX_139601XX_139602XX_139603XX_139604XX_139605XX_139606XX_139607XX

1




ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	11,2	13,2	4,1
500	11,2	13,2	6,1
700	11,2	13,2	9
 RED		 BLACK	
For serial connection, respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.			


2

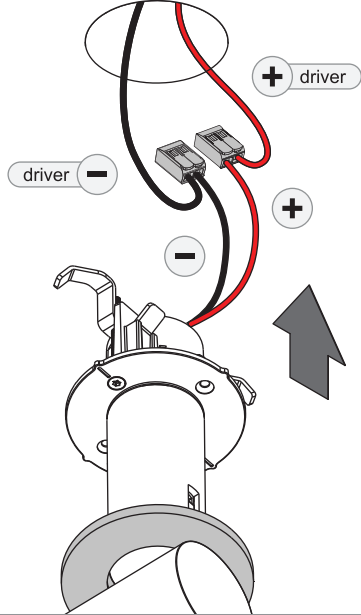


3

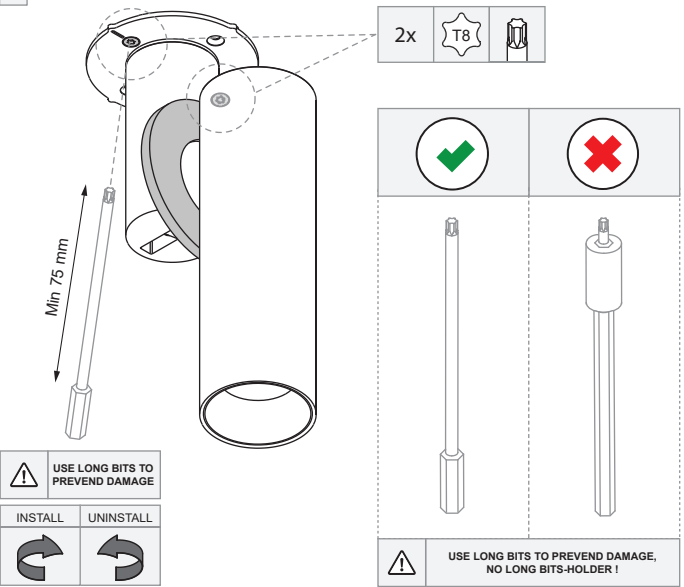



4 SWITCH CLAMPING BRACKETS, DEPENDING ON CEILING THICKNESS

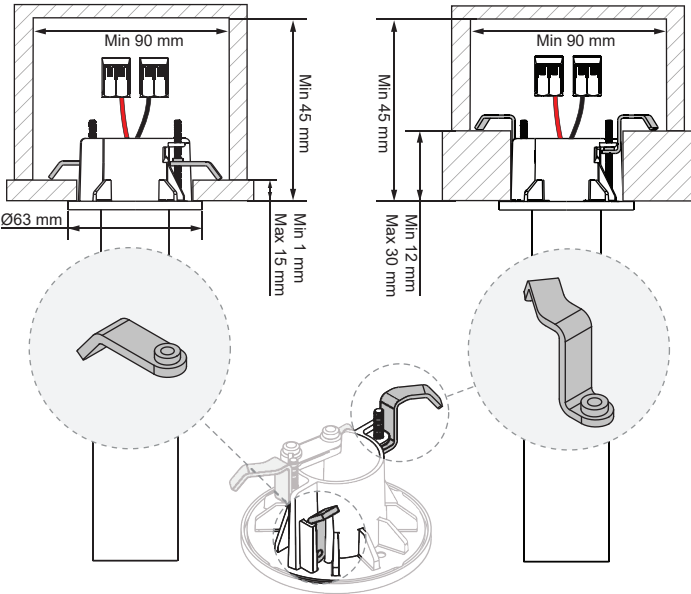

5

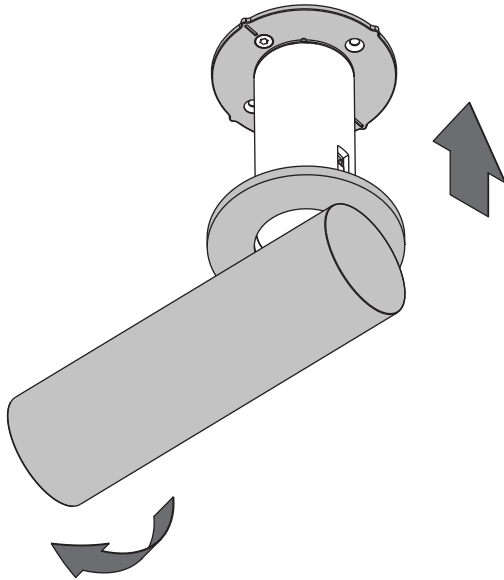

6



LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source and/or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

SERVICEABLE COMPONENTS & ACCESSORIES

For latest version of available accessories or serviceable components check www.supermodular.com or connect with your sales contact.