


Mini multiple trimless for smartrings 4x LED

125380XX-B1_125381XX-B1_125382XX-B1

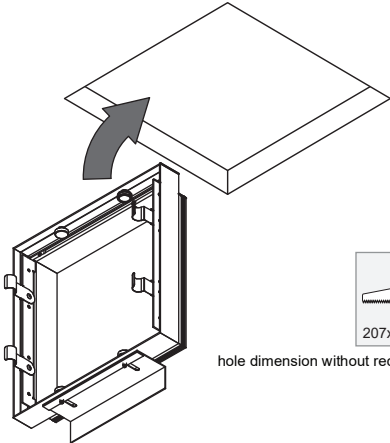

1


Has to be combined with :
10460430 Mini-multiple trimless 4sq recessed frame




207x234.5mm

hole dimension without recessed frame.

ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	13,2	15,0	5,0
500	13,7	15,4	7,2
 RED		 BLACK	
For serial connection, respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.			

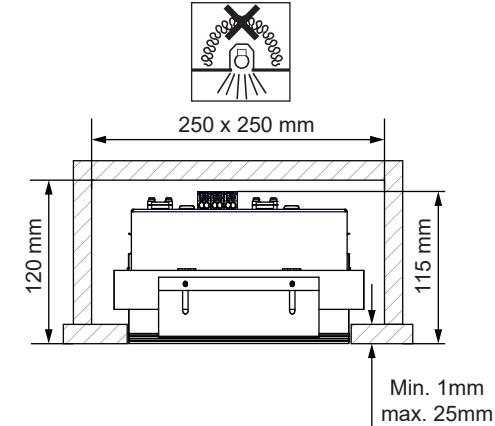

2

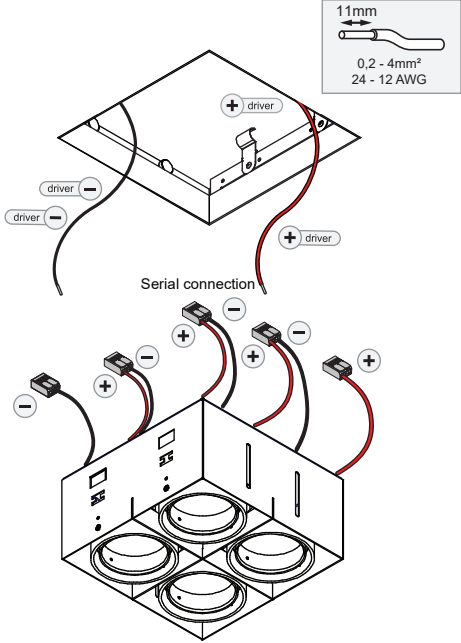



11mm


0,2 - 4mm²


24 - 12 AWG

Serial connection




3

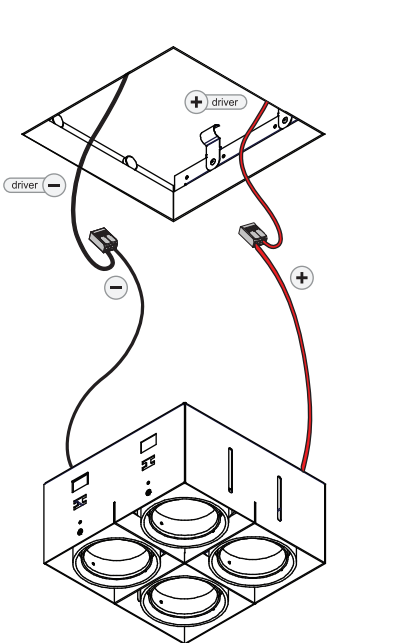




DO NOT TOUCH REFLECTOR





Turn




Push


4







LIGHT SOURCE - DO NOT TOUCH LED
Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE
A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.