Smart Cake/Kup/Lotis 48+ IP55 LED DE

128620XX_128621XX_128622XX_128720XX_128721XX_128722XX_128820XX_128821XX_128822XX

SMART CAKE 48



SMART KUP 48



SMART LOTIS 48



1



gips/gypsum/gypse/gips/yeso/gesso



hout/wood/bois/Holz/madera/legno



ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350 500	7,5 7,8	9,5 9,8	3,0 4,4
+ RED		− BLACK	
For serial connection, respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.			



2

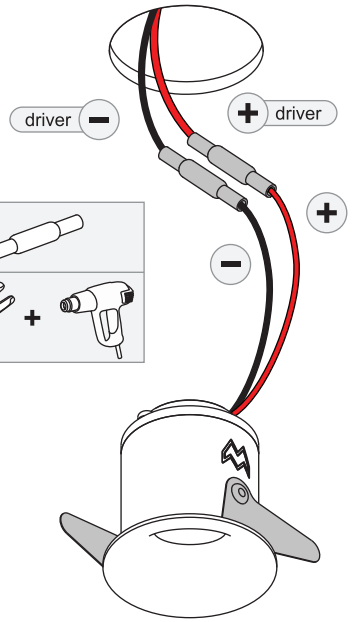





SERIAL CONNECTION:

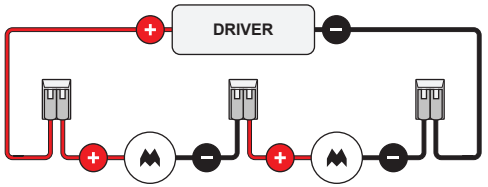

Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!

3





Replace protective shield when broken. The luminaire shall only be used complete with its protective shield. Reference number: 1006610

LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source.The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.