

Smart Kup Tube Wall 3.2

Overview




Smart Kup is one of the 3 forms of the Smart family. The cone of the Smart Kup ends in a fine trim. A trim particular Modular. The same subtle trim is used in several other Modular luminaires

With an outer diameter of 3.2" and an aperture of 3.1 inches (fixed version) or 2.3 inches (adjustable version), the Smart Kup 3.2 is compact yet powerful. Combined with a wall tube (cylinder) that is offered in 1X and 2X, and multiple finishes, the beautiful combinations are yours to discover.


How to Specify (example)

1. Select Lamp Unit → Page 2




Example: **SMART-K-R-3.2-1X-MG-30F-DP-DE-WHS**
Smart Kup 3.2, fix version, microprismatic glass, 3000K, flood, damp rated, white structure

2. Select Tube → Page 3



Example: **SMARU-W-3.2-XL-1X-DP-010P-DI-500-BLS**
Tube Wall 3.2 XL, 1 lamp version, damp rated, 0-10V, ELV & Triac driver included, 500mA, black structure

3. Select Optional Accessories → Page 4



Example: **BP-C-44-SMART-TW-3.2-XL-1X-BLS**
Backplate Cover, for 4"x4" octagonal junction box, Tube Wall 3.2 XL, 1 lamp version, black structure


Example order:

Quantity	Item
1	SMART-K-R-3.2-1X-MG-30F-DP-DE-WHS
1	SMARU-W-3.2-XL-1X-DP-010P-DI-500-BLS
1	BP-C-44-SMART-TW-3.2-XL-1X-BLS


Smart Kup Tube Wall 3.2

Lamp Specifications

- Aperture: 3.1" (fix version), 2.3" (adjustable version)
- Adjustability: 0-25° (adjustable version only)
- Trim material: cast aluminum
- Trim finish: powder coat or wet paint
- Must be combined with Tube



Smart Kup 3.2 (fix version)




Smart Kup Adjustable 3.2 (adjustable version)

Finish Information



Black Structure (BLS)
Powder Coat (Matte)



White Structure (WHS)
Powder Coat (Matte)



Gold (GOMT)
Wet Paint (Matte)




Black (BLBR)
Wet Paint (Brushed)



Bronze (BRBR)
Wet Paint (Brushed)



Champagne (CHBR)
Wet Paint (Brushed)



Silver Bronze (SBBR)
Wet Paint (Brushed)

Ordering Information

SMART-K-R-3.2-1X		-		-		-	DP	-	DE	-				
SMART-K-R-3.2-1X	Smart Kup 3.2 (fix version)	MG	Microprismatic Glass	27	2700K	F	Flood (41°) ⁽²⁾	DP	Damp Location		BLS	Black Structure		
		FG	Frosted Glass ⁽¹⁾	30	3000K	M	Medium (23°)				S	Spot (TBD°) ⁽¹⁾	WHS	White Structure
													GOMT	Gold Matte
													BLBR	Black Brushed
									BRBR	Bronze Brushed				
									CHBR	Champagne Brushed				
									SBBR	Silver Bronze Brushed				

SMART-K-R-A-3.2-1X		-		-		-	DP	-	DE	-		
SMART-K-R-A-3.2-1X	Smart Kup Adjustable 3.2 (adjustable version) ⁽³⁾			27	2700K	F	Flood (40°)	DP	Damp Location		BLS	Black Structure
				30	3000K	M	Medium (22°)				WHS	White Structure
				35	3500K						GOMT	Gold Matte

⁽¹⁾ Frosted Glass can only be combined with a Flood beam angle

⁽²⁾ Frosted Glass version: 38°


⁽³⁾ Adjustable version is always provided without a Glass

⁽⁷⁾ Available soon


Smart Kup Tube Wall 3.2

Tube Specifications

- Tube material: cast aluminum
- Tube finish: powder coat
- Driver: included in the tube
- Suitable for 1 lamp unit (1X versions) or 2 lamp units (2X versions)
- Included: plaster finish plate for installation with a 4"x4" octagonal junction box
- Can optionally be combined with Backplate to cover the junction box
- Weight: 1.8lbs (L versions), 2.7lbs (XL versions)

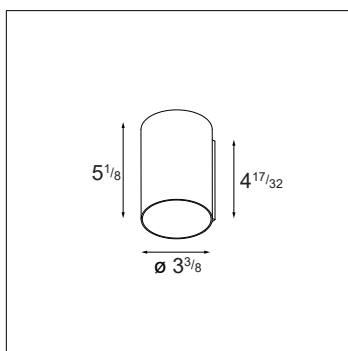

Tube Wall 3.2 L 1X

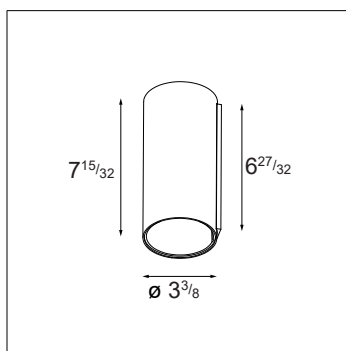


Tube Wall 3.2 XL 1X / 2X

Finish Information



Black Structure (BLS)
Powder Coat (Matte)



White Structure (WHS)
Powder Coat (Matte)

Tube Specifications & Ordering Information

Ordering Code	Version	Finish	Input	Output	Dim ⁽⁵⁾	Connected Load
SMARU-W-3.2-L-1X-DP-010P-DI-500-BLS	Tube Wall 3.2 L 1X	Black Structure	120-277VAC ⁽⁴⁾	500mA DC	0-10V, ELV & Triac - 1%	10.5W
SMARU-W-3.2-L-1X-DP-010P-DI-500-WHS	Tube Wall 3.2 L 1X	White Structure	120-277VAC ⁽⁴⁾	500mA DC	0-10V, ELV & Triac - 1%	10.5W
SMARU-W-3.2-XL-1X-DP-010P-DI-500-BLS	Tube Wall 3.2 XL 1X	Black Structure	120-277VAC ⁽⁴⁾	500mA DC	0-10V, ELV & Triac - 1%	10.5W
SMARU-W-3.2-XL-1X-DP-010P-DI-500-WHS	Tube Wall 3.2 XL 1X	White Structure	120-277VAC ⁽⁴⁾	500mA DC	0-10V, ELV & Triac - 1%	10.5W
SMARU-W-3.2-XL-2X-DP-010P-DI-500-BLS	Tube Wall 3.2 XL 2X	Black Structure	120-277VAC ⁽⁴⁾	500mA DC	0-10V, ELV & Triac - 1%	21.5W
SMARU-W-3.2-XL-2X-DP-010P-DI-500-WHS	Tube Wall 3.2 XL 2X	White Structure	120-277VAC ⁽⁴⁾	500mA DC	0-10V, ELV & Triac - 1%	21.5W

⁽⁴⁾ Dimming via ELV & Triac only compatible at 120VAC input

⁽⁵⁾ Consult the factory for dimmer compatibility


Accessories Specifications

Plaster Finish Plate


- Always included with the Tube
- An additional Plaster Plate can be ordered, to be delivered in advance

Backplate


- Optional
- Covers a 4"x4" octagonal or 3"x2" junction box
- Material: stainless steel
- Finish: powder coat
- Thickness: 0.08"
- Weight: 0.7lbs

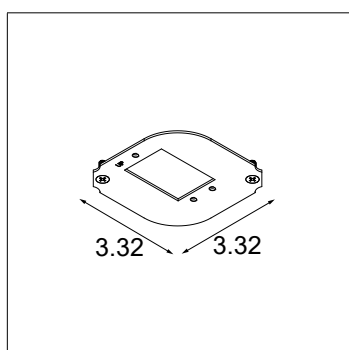


Plaster Plate Tube Wall 3.2 L 1X / XL 2X

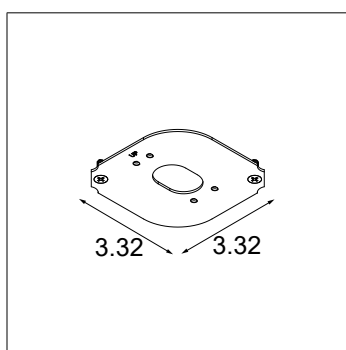

Plaster Plate Tube Wall 3.2 XL 1X

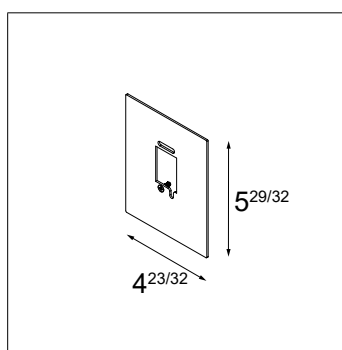

Backplate Tube Wall 3.2 L 1X

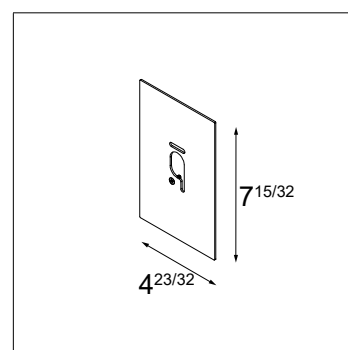


Backplate Tube Wall 3.2 XL 1X / 2X

Finish Information



Black Structure (BLS)
Powder Coat (Matte)



White Structure (WHS)
Powder Coat (Matte)

Ordering Information

PP	-	44	-	
-----------	---	-----------	---	--

PP	Plaster Finish Plate	44	For 4"x4" octagonal junction box	SMART-TW-3.2-L-1X-XL-2X	Tube Wall 3.2 L 1X / XL 2X ⁽⁶⁾
				SMART-TW-3.2-XL-1X	Tube Wall 3.2 XL 1X ⁽⁶⁾

BP-C	-		-		-	
-------------	---	--	---	--	---	--

BP-C	Backplate Cover	44	For 4"x4" octagonal junction box	SMART-TW-3.2-L-1X	Tube Wall 3.2 L 1X ⁽⁶⁾	BLS	Black Structure
		32	For 3"x2" junction box	SMART-TW-3.2-XL-1X	Tube Wall 3.2 XL 1X ⁽⁶⁾	WHS	White Structure
				SMART-TW-3.2-XL-2X	Tube Wall 3.2 XL 2X ⁽⁶⁾		

⁽⁶⁾ Size must match Tube size (page 3)



Smart Kup Tube Wall 3.2

Performance Specifications (per lamp unit)

Lamp Unit	Fix	Adjustable
Weight	0.79lbs	0.89lbs
Adjustability	-	0-25°
Location	damp	damp
CRI*	92, R9: 71	92, R9: 71
Lifetime	L80 B20 @ 50,000 hrs	L80 B20 @ 50,000 hrs
UGR	see website	see website

Electrical (typical)	Fix	Adjustable
Drive Current (mA DC)	500	500
Forward Voltage (V)	14.4	14.4
LED Power (W)	7.2	7.2

* CRI & TM-30 Value for 3000K

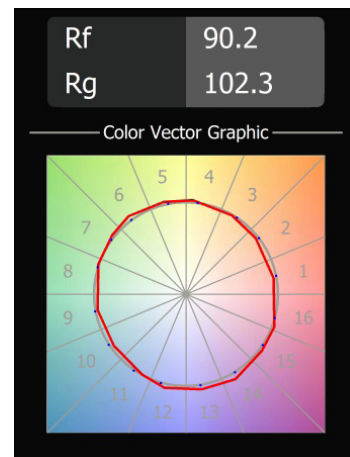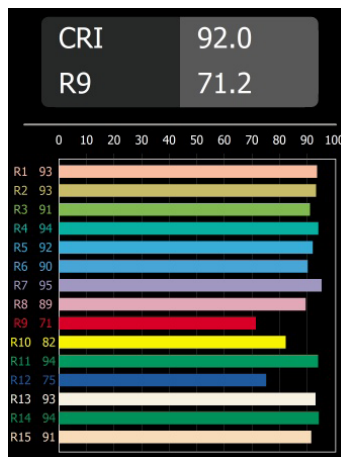

For photometric files see website or contact factory.

Output Specifications (per lamp unit)

Reference Delivered Lumens	CCT	Optics	Drive Current	Finish
Fix				
767 (ref. 3000K, MG F, 500mA WHS)	2700K (0.96) 3000K (1.00) 3500K (1.03)	MG F (1.00) MG M (1.05) MG S (TBD) FG F (0.88)	500mA (1.00)	BLS (0.90) WHS (1.00) GOMT (0.94) BLBR (0.89) BRBR (0.90) CHBR (0.94) SBBR (0.95)
Adjustable				
686 (ref. 3000K, F, 500mA, WHS)	2700K (0.95) 3000K (1.00) 3500K (1.03)	F (1.00) M (1.05)	500mA (1.00)	BLS (0.99) WHS (1.00) GOMT (1.04)

Multipliers are indicated between brackets: ()

Example calculation, to determine typical output for Fix version, 2700K, Microprismatic Glass, Medium, 500mA Black Structure: $767 \times (0.96) \times (1.05) \times (1.00) \times (0.90) = 695$ lumens

Listings and Certifications

- Listed: cULus
- Damp locations
- ADA compliant



Warranty

- Visit <https://www.supermodular.com/en-us/warranty/>