

Smart Lotis Box Surface 3.2

Overview




Smart Lotis is the best known fixture within the Smart family. The deeply recessed cone which holds the light source inspired the designers to create a very versatile spot to be combined with multiple accessories.

With an outer diameter of 3.2" and an aperture of 2.7 inches (fixed version) or 2 inches (adjustable version), the Smart Lotis 3.2 is compact yet powerful. Combined with a surface box that is offered in 1X and 2X and multiple finishes, the beautiful combinations are yours to discover.


How to Specify (example)

1. Select Lamp Unit → Page 2




Example: **SMART-L-R-A-3.2-1X-30F-DP-DE-WHS**
Smart Lotis 3.2, adjustable version, 3000K, flood, damp rated, white structure

2. Select Box → Page 3



Example: **SMARX-S-3.2-2X-010P-DI-500-BLS**
Box Surface 3.2, 2 lamp version, 0-10V, ELV & Triac driver included, 500mA, black structure

3. Select Mask → Page 4



Example: **SMART-M-3.2-2X-WHS**
Mask 3.2, 2 lamp version, white structure


Example order:

Quantity	Item
2	SMART-L-R-A-3.2-1X-30F-DP-DE-WHS
1	SMARX-S-3.2-2X-010P-DI-500-BLS
1	SMART-M-3.2-2X-WHS


Smart Lotis Box Surface 3.2

Lamp Specifications

- Aperture: 2.7" (fix version), 2" (adjustable version)
- Adjustability: 0-25° (adjustable version only)
- Trim material: cast aluminum
- Trim finish: powder coat or wet paint
- Must be combined with Box and Mask



Smart Lotis 3.2 (fix version)

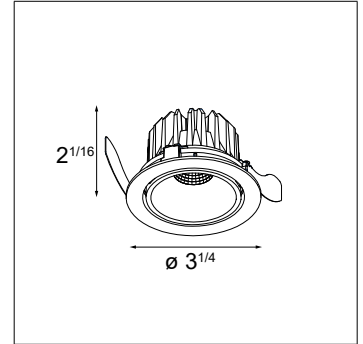


Smart Lotis Adjustable 3.2 (adjustable version)

Finish Information



Black Structure (BLS)
Powder Coat (Matte)




White Structure (WHS)
Powder Coat (Matte)



Gold (GOMT)
Wet Paint (Matte)




Black (BLBR)
Wet Paint (Brushed)



Bronze (BRBR)
Wet Paint (Brushed)



Champagne (CHBR)
Wet Paint (Brushed)



Silver Bronze (SBBR)
Wet Paint (Brushed)

Ordering Information

SMART-L-R-3.2-1X		-		-		-	DP	-	DE	-	
SMART-L-R-3.2-1X	Smart Lotis 3.2 (fix version)	MG	Microprismatic Glass	27	2700K	F	Flood (41°) ⁽²⁾	DP	Damp Location	BLS	Black Structure
		FG	Frosted Glass ⁽¹⁾	30	3000K	M	Medium (23°)			WHS	White Structure
				35	3500K	S	Spot (TBD*) ⁽⁷⁾			GOMT	Gold Matte
										BLBR	Black Brushed
										BRBR	Bronze Brushed
										CHBR	Champagne Brushed
										SBBR	Silver Bronze Brushed
SMART-L-R-A-3.2-1X		-		-		-	DP	-	DE	-	
SMART-L-R-A-3.2-1X	Smart Lotis Adjustable 3.2 (adjustable version) ⁽³⁾			27	2700K	F	Flood (40°)	DP	Damp Location	BLS	Black Structure
				30	3000K	M	Medium (22°)			WHS	White Structure
				35	3500K					GOMT	Gold Matte

⁽¹⁾ Frosted Glass can only be combined with a Flood beam angle

⁽²⁾ Frosted Glass version: 38°


⁽³⁾ Adjustable version is always provided without a Glass

⁽⁷⁾ Available soon


Smart Lotis Box Surface 3.2

Box Specifications

- Box material: extruded aluminum
- Box finish: powder coat
- Driver: included in the box
- Suitable for 1 lamp unit (1X versions) or 2 lamp units (2X versions)
- Box completely covers a 4"x4" octagonal junction box (no covers needed)
- Must be combined with Mask (specify on the next page)
- Weight: 1.7lbs (1X versions), 2.4lbs (2X versions)



Box Surface 3.2 1X




Box Surface 3.2 2X

Finish Information



Black Structure (BLS)
Powder Coat (Matte)



White Structure (WHS)
Powder Coat (Matte)

Box Specifications & Ordering Information

Ordering Code	Version	Finish	Input	Output	Dim ⁽⁵⁾	Connected Load
SMARX-S-3.2-1X-010P-DI-500-BLS	Box Surface 3.2 1X	Black Structure	120-277VAC ⁽⁴⁾	500mA DC	0-10V, ELV & Triac - 1%	10.5W
SMARX-S-3.2-1X-010P-DI-500-WHS	Box Surface 3.2 1X	White Structure	120-277VAC ⁽⁴⁾	500mA DC	0-10V, ELV & Triac - 1%	10.5W
SMARX-S-3.2-2X-010P-DI-500-BLS	Box Surface 3.2 2X	Black Structure	120-277VAC ⁽⁴⁾	500mA DC	0-10V, ELV & Triac - 1%	21.5W
SMARX-S-3.2-2X-010P-DI-500-WHS	Box Surface 3.2 2X	White Structure	120-277VAC ⁽⁴⁾	500mA DC	0-10V, ELV & Triac - 1%	21.5W


⁽⁴⁾ Dimming via ELV & Triac only compatible at 120VAC input

⁽⁵⁾ Consult the factory for dimmer compatibility


Smart Lotis Box Surface 3.2

Mask Specifications

- Mask material: cast aluminum
- Mask finish: power coat or wet paint
- Mask thickness: 0.2"
- Weight: 0.2lbs (1X version), 0.3lbs (2X version)



Mask 3.2 1X




Mask 3.2 2X

Finish Information




Black Structure (BLS)
Powder Coat (Matte)




White Structure (WHS)
Powder Coat (Matte)



Gold (GOMT)
Wet Paint (Matte)



Black (BLBR)
Wet Paint (Brushed)



Bronze (BRBR)
Wet Paint (Brushed)



Champagne (CHBR)
Wet Paint (Brushed)



Silver Bronze (SBBR)
Wet Paint (Brushed)

Ordering Information

SMART-M-3.2 - -

SMART-M-3.2 Mask 3.2	1X	For 1 lamp unit ⁽⁶⁾	BLS	Black Structure
	2X	For 2 lamp units ⁽⁶⁾	WHS	White Structure
			GOMT	Gold Matte
			BLBR	Black Brushed
			BRBR	Bronze Brushed
			CHBR	Champagne Brushed
			SBBR	Silver Bronze Brushed

⁽⁶⁾ Size must match Box size (page 3)


Smart Lotis Box Surface 3.2

Performance Specifications (per lamp unit)

Lamp Unit	Fix	Adjustable
Weight	0.79lbs	0.89lbs
Adjustability	-	0-25°
Location	damp	damp
CRI*	92, R9: 71	92, R9: 71
Lifetime	L80 B20 @ 50,000 hrs	L80 B20 @ 50,000 hrs
UGR	see website	see website

Electrical (typical)	Fix	Adjustable
Drive Current (mA DC)	500	500
Forward Voltage (V)	14.4	14.4
LED Power (W)	7.2	7.2

* CRI & TM-30 Value for 3000K

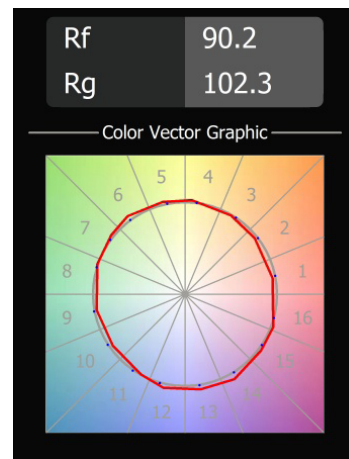

For photometric files see website or contact factory.

Output Specifications (per lamp unit)

Reference Delivered Lumens	CCT	Optics	Drive Current	Finish
Fix				
761 (ref. 3000K, MG F, 500mA WHS)	2700K (0.96) 3000K (1.00) 3500K (1.03)	MG F (1.00) MG M (1.04) MG S (TBD) FG F (0.88)	500mA (1.00)	BLS (0.91) WHS (1.00) GOMT (0.96) BLBR (0.94) BRBR (0.91) CHBR (0.95) SBBR (0.95)
Adjustable				
686 (ref. 3000K, F, 500mA, WHS)	2700K (0.95) 3000K (1.00) 3500K (1.03)	F (1.00) M (1.05)	500mA (1.00)	BLS (0.99) WHS (1.00) GOMT (1.04)

Multipliers are indicated between brackets: ()

Example calculation, to determine typical output for Fix version, 2700K, Microprismatic Glass, Medium, 500mA Black Structure: $761 \times (0.96) \times (1.04) \times (1.00) \times (0.91) = 691$ lumens

Listings and Certifications

- Listed: cULus
- Damp locations



Warranty

- Visit <https://www.supermodular.com/en-us/warranty/>