

Smart Lotis Tube Suspended 3.2

Overview




Smart Lotis is the best known fixture within the Smart family. The deeply recessed cone which holds the light source inspired the designers to create a very versatile spot to be combined with multiple accessories.

With an outer diameter of 3.2" and an aperture of 2.7 inches (fixed version) or 2 inches (adjustable version), the Smart Lotis 3.2 is compact yet powerful. Combined with a suspended tube (cylinder) that has multiple finishes, the beautiful combinations are yours to discover.


How to Specify (example)

1. Select Lamp Unit → Page 2




Example: **SMART-L-R-3.2-1X-MG-30F-DP-DE-GOMT**
Smart Lotis 3.2, fix version, microprismatic glass, 3000K, flood, damp rated, gold

2. Select Tube → Page 3



Example: **SMARU-SP-3.2-XL-1X-DP-LE/TE-DI-500-BLS**
Tube Suspended 3.2 XL, damp rated, ELV & Triac driver included, 500mA, black structure

3. Select Optional Accessories → Page 4



Example: **BP-C-44-SMART-TSS-3.2-XL-BLS**
Backplate Cover, for 4"x4" octagonal junction box, Tube Suspended 3.2 XL, black structure


Example order:

Quantity	Item
1	SMART-L-R-3.2-1X-MG-30F-DP-DE-GOMT
1	SMARU-SP-3.2-XL-1X-DP-LE/TE-DI-500-BLS
1	BP-C-44-SMART-TSS-3.2-XL-BLS


Smart Lotis Tube Suspended 3.2

Lamp Specifications

- Aperture: 2.7" (fix version), 2" (adjustable version)
- Adjustability: 0-25° (adjustable version only)
- Trim material: cast aluminum
- Trim finish: powder coat or wet paint
- Must be combined with Tube

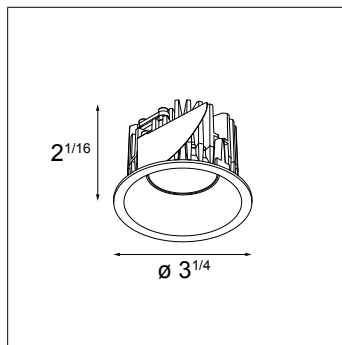

Smart Lotis 3.2 (fix version)

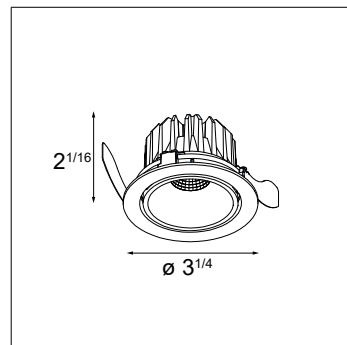


Smart Lotis Adjustable 3.2 (adjustable version)

Finish Information



Black Structure (BLS)
Powder Coat (Matte)



White Structure (WHS)
Powder Coat (Matte)



Gold (GOMT)
Wet Paint (Matte)




Black (BLBR)
Wet Paint (Brushed)



Bronze (BRBR)
Wet Paint (Brushed)



Champagne (CHBR)
Wet Paint (Brushed)



Silver Bronze (SBBR)
Wet Paint (Brushed)

Ordering Information

SMART-L-R-3.2-1X		-		-		-	DP	-	DE	-		
SMART-L-R-3.2-1X	Smart Lotis 3.2 (fix version)	MG	Microprismatic Glass	27	2700K	F	Flood (41°) ⁽²⁾	DP	Damp Location		BLS	Black Structure
		FG	Frosted Glass ⁽¹⁾	30	3000K	M	Medium (23°)				WHS	White Structure
				35	3500K	S	Spot (TBD°) ^(*)				GOMT	Gold Matte
											BLBR	Black Brushed
											BRBR	Bronze Brushed
											CHBR	Champagne Brushed
											SBBR	Silver Bronze Brushed

SMART-L-R-A-3.2-1X		-		-		-	DP	-	DE	-		
SMART-L-R-A-3.2-1X	Smart Lotis Adjustable 3.2 (adjustable version) ⁽³⁾			27	2700K	F	Flood (40°)	DP	Damp Location		BLS	Black Structure
				30	3000K	M	Medium (22°)				WHS	White Structure
				35	3500K						GOMT	Gold Matte

⁽¹⁾ Frosted Glass can only be combined with a Flood beam angle

⁽²⁾ Frosted Glass version: 38°


⁽³⁾ Adjustable version is always provided without a Glass

^(*) Available soon

Smart Lotis Tube Suspended 3.2

Tube Specifications

- Tube material: cast aluminum
- Tube finish: powder coat
- Canopy material: aluminum
- Canopy finish: powder coat (color matches the color of the tube)
- Cable finish: woven fabric
- Cable color: black
- Cable diameter: 0.3"
- Cable length is field adjustable
- Driver: included in the tube
- Suitable for 1 lamp unit
- Included: plaster finish plate for installation with a 4"x4" octagonal junction box
- Can optionally be combined with Backplate to cover the junction box
- Weight: 3.8lbs

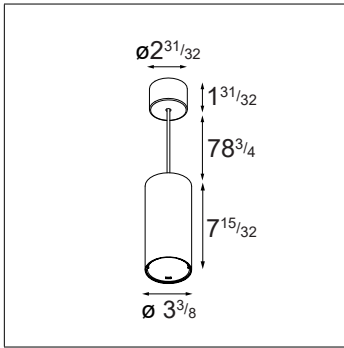


Tube Suspended 3.2 XL 1X

Finish Information



Black Structure (BLS)
Powder Coat (Matte)



White Structure (WHS)
Powder Coat (Matte)

Tube Specifications & Ordering Information

Ordering Code	Version	Finish	Input	Output	Dim ⁽⁴⁾	Connected Load
SMARU-SP-3.2-XL-1X-DP-LE/TE-DI-500-BLS	Tube Suspended 3.2 XL 1X	Black Structure	120VAC	500mA DC	ELV & Triac - 1%	10.5W
SMARU-SP-3.2-XL-1X-DP-LE/TE-DI-500-WHS	Tube Suspended 3.2 XL 1X	White Structure	120VAC	500mA DC	ELV & Triac - 1%	10.5W

⁽⁴⁾ Consult the factory for dimmer compatibility

Smart Lotis Tube Suspended 3.2


Accessories Specifications

Plaster Finish Plate


- Always included with the Tube
- An additional Plaster Plate can be ordered, to be delivered in advance

Backplate

- Optional
- Covers a 4"x4" octagonal or 3"x2" junction box
- Material: stainless steel
- Finish: powder coat
- Thickness: 0.08"
- Weight: 0.7lbs

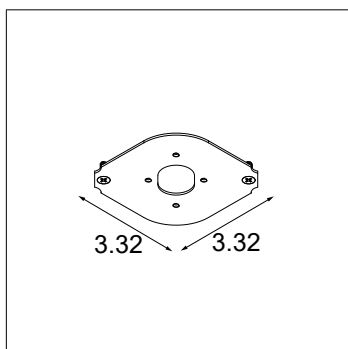

Plaster Plate Tube Suspended 3.2 XL

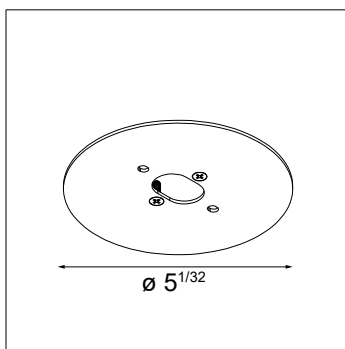


Backplate Tube Suspended 3.2 XL

Finish Information



Black Structure (BLS)
Powder Coat (Matte)



White Structure (WHS)
Powder Coat (Matte)

Ordering Information

PP	-	44	-	SMART-TSS-3.2-4.5
-----------	---	-----------	---	--------------------------

PP	Plaster Finish Plate	44	For 4"x4" octagonal junction box	SMART-TSS-3.2-4.5	Tube Suspended 3.2 XL
-----------	----------------------	-----------	----------------------------------	--------------------------	-----------------------

BP-C	-		-	SMART-TSS-3.2-XL	-	
-------------	---	--	---	-------------------------	---	--

BP-C	Backplate Cover	44	For 4"x4" octagonal junction box	SMART-TSS-3.2-XL	Tube Suspended 3.2 XL	BLS	Black Structure
		32	For 3"x2" junction box			WHS	White Structure



Smart Lotis Tube Suspended 3.2

Performance Specifications (per lamp unit)

Lamp Unit	Fix	Adjustable
Weight	0.79lbs	0.89lbs
Adjustability	-	0-25°
Location	damp	damp
CRI*	92, R9: 71	92, R9: 71
Lifetime	L80 B20 @ 50,000 hrs	L80 B20 @ 50,000 hrs
UGR	see website	see website

Electrical (typical)	Fix	Adjustable
Drive Current (mA DC)	500	500
Forward Voltage (V)	14.4	14.4
LED Power (W)	7.2	7.2

* CRI & TM-30 Value for 3000K

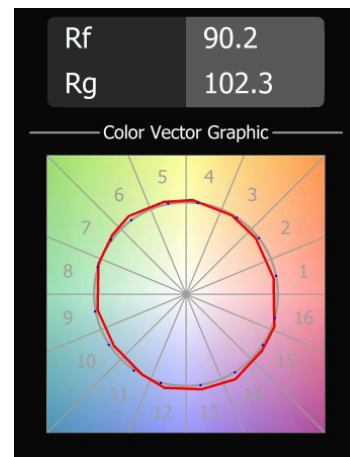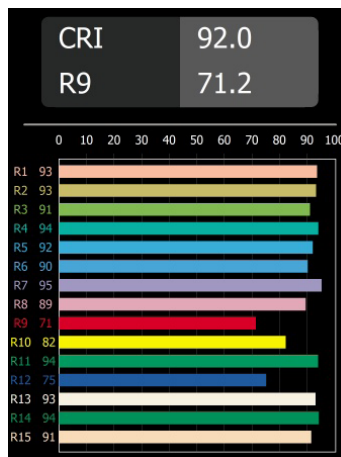

For photometric files see website or contact factory.

Output Specifications (per lamp unit)

Reference Delivered Lumens	CCT	Optics	Drive Current	Finish
Fix				
761 (ref. 3000K, MG F, 500mA WHS)	2700K (0.96) 3000K (1.00) 3500K (1.03)	MG F (1.00) MG M (1.04) MG S (TBD) FG F (0.88)	500mA (1.00)	BLS (0.91) WHS (1.00) GOMT (0.96) BLBR (0.94) BRBR (0.91) CHBR (0.95) SBBR (0.95)
Adjustable				
686 (ref. 3000K, F, 500mA, WHS)	2700K (0.95) 3000K (1.00) 3500K (1.03)	F (1.00) M (1.05)	500mA (1.00)	BLS (0.99) WHS (1.00) GOMT (1.04)

Multipliers are indicated between brackets: ()

Example calculation, to determine typical output for Fix version, 2700K, Microprismatic Glass, Medium, 500mA Black Structure: $761 \times (0.96) \times (1.04) \times (1.00) \times (0.91) = 691$ lumens

Listings and Certifications

- Listed: cULus
- Damp locations



Warranty

- Visit <https://www.supermodular.com/en-us/warranty/>