

## Placebo Suspended - Driver External

### Overview




### Pure shapes with function and form

A playful luminaire, the idea of Placebo quickly became a product family. Placebo isn't just one luminaire. Two shapes, each in 2 sizes, and all 4 offer 2 lighting possibilities. Ball or tube, small or large, many colors, or dress up Placebo with its decorative shades to add presence and volume. It's a family of elements inviting you to mix and match. Placebo is a multitude of playful general lighting luminaires for residential, hospitality and small retail spaces.


### How to Specify (Example)

#### 1. Select suspension body → Page 2




Example: **PLACE-SP-D-2.4-1X-27-DP-DE-CHBA**  
(Placebo Suspended Down 2.4 1x, 2700K, damp rated, driver external, anodized champagne)

#### 2. Select Glass → Page 3




Example: **PLACEBO-GLB-DO-6.1**  
(Placebo Glass Ball down, 6.1")

#### 3. Select Remote Driver → Page 4




Example: **IC-RD-DP-0101-EL-500-10**  
(IC rated, Damp rated, 0-10V, 500mA, 10W)

#### 4. Select Mounting Accessory → Page 5



Example: **BP-C-44-PLACEBO-DE-BLS**  
(Backplate, for 4x4, black)

#### 5. Select Optional Shade → Page 6



Example: **PLACEBO-BEANIE-CH**  
(Placebo Beanie Champagne)


#### Example Order:

Qty.	Item
1	PLACE-SP-D-2.4-1X-27-DP-DE-CHBA
1	PLACEBO-GLB-DO-6.1
1	IC-RD-DP-0101-EL-500-10
1	BP-C-44-PLACEBO-DE-BLS
1	PLACEBO-BEANIE-CH


## Placebo Suspended - Driver External

### Luminaire Specifications & Ordering Information

- Body Material: Aluminum
- Finish: Powder Coat or anodized
- The canopy color is black struc (for all, except white) or white struc (for white Placebo bodies)
- Cable Diameter: 0.18"
- Cable Color: Black
- Cable length can be shortened during installation
- Driver: Remote (ordered separately)
- **Must be combined with glass and mounting accessory**



Placebo Down Suspended

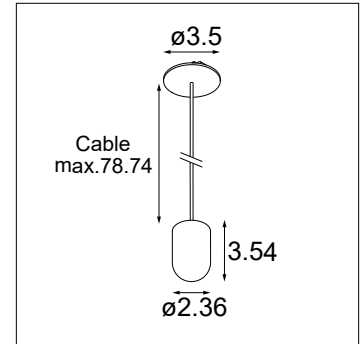

Placebo Up Suspended

### Finish Information




### Ordering Information

				DP	DE		
<b>PLACE-SP-D-2.4-1X</b>	Placebo Suspended Down 2.4 1x	27	2700K	<b>DP</b>	Driver External	<b>WHS</b>	White Structure
<b>PLACE-SP-U-2.4-1X</b>	Placebo Suspended Up 2.4 1x	30	3000K			<b>BLS</b>	Black Structure
		35	3500K			<b>BLBA</b>	Anodized Black
		<b>WD</b>	Warm Dim			<b>BRBA</b>	Anodized Bronze
						<b>CHBA</b>	Anodized Champagne
						<b>SBBA</b>	Anodized Silver Bronze


## Placebo Suspended - Driver External

### Glass Specifications


- Glass selection required for use with Placebo
- Glass components attach mechanically with a twist to lock onto Placebo luminaire
- Glass Material: 3-layer hand blown glass
- For “up” versions, cable is not visible through glass

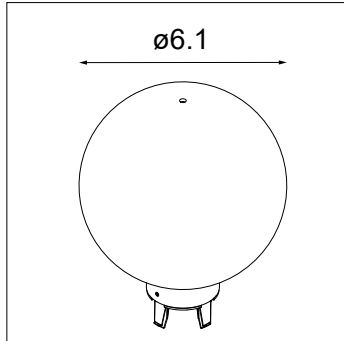


Placebo Glass Ball Up (GLB) Ø6.1"

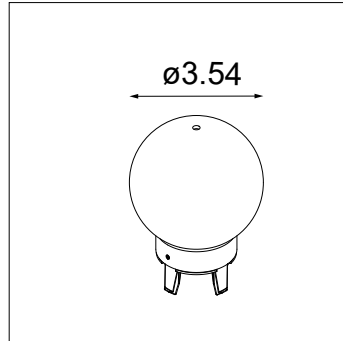


Placebo Glass Ball Up (GLB) Ø3.5"

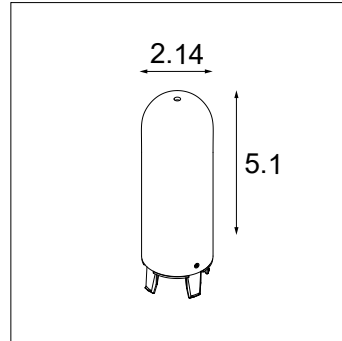


Placebo Glass Tube Up (GLT) 5.1"

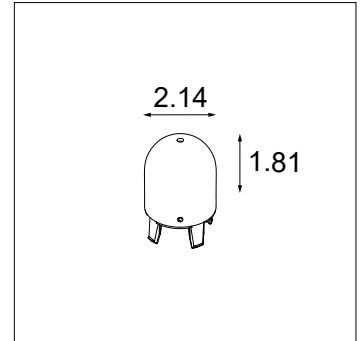


Placebo Glass Tube Up (GLT) 1.8"

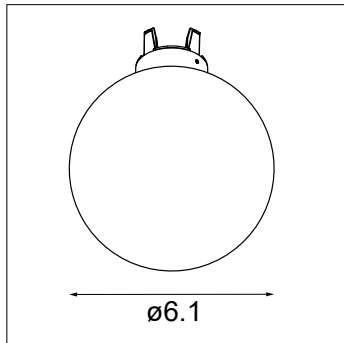


Placebo Glass Ball Down (GLB) Ø6.1"

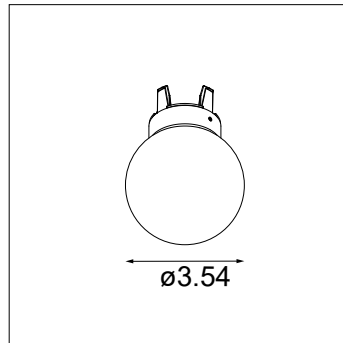

Placebo Glass Ball Down (GLB) Ø3.5"

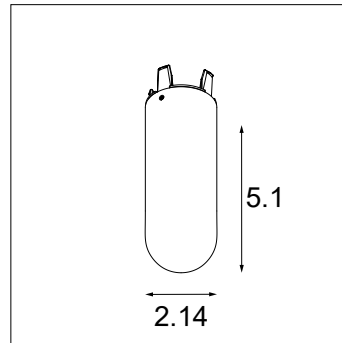

Placebo Glass Tube Down (GLT) 5.1"

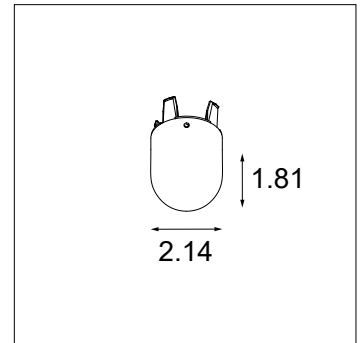

Placebo Glass Tube Down (GLT) 1.8"


### Glass Information & Ordering

SELECTION ↓	ORDERING CODE	WEIGHT	COMPATIBILITY	
			UP	DOWN
	PLACEBO-GLB-DO-3.5	0.39lbs	No	Yes
	PLACEBO-GLB-DO-6.1	1.07lbs	No	Yes
	PLACEBO-GLT-DO-1.8	0.14lbs	No	Yes
	PLACEBO-GLT-DO-5.1	0.37lbs	No	Yes
	PLACEBO-GLB-UP-3.5	0.39lbs	Yes	No
	PLACEBO-GLB-UP-6.1	1.07lbs	Yes	No
	PLACEBO-GLT-UP-1.8	0.14lbs	Yes	No
	PLACEBO-GLT-UP-5.1	0.37lbs	Yes	No

## Placebo Suspended - Driver External

### Remote Driver Specifications

- Remote Driver housing material: Sheet metal (galvanized steel)
- Remote driver housing can be bottom mounted, side mounted or mounted to t-bar grid.



Remote Driver Box

### Remote Driver Information & Ordering

ORDERING CODE	DIMMING TYPE & TYPICAL DIMMING LEVEL**	DESCRIPTION	DRIVER LOCATION			PLACEBO			PLACEBO WARM DIM				
			RECESSED TYPE IC	RECESSED TYPE NON-IC	SURFACE	CABINET	UNDER CABINET	1X	2X	3X	1X	2X	3X
<b>Input: 120-277Vac*</b>													
<b>Output: 350mA</b>													
IC-RD-DP-0101-EL-350-30	0-10V (ELDOLED)	1.0%	IC remote LED driver 350mA 30W 0-10V 1% (ELDOLED) DI	✓	-	✓	✓	✓	✓	✓	✓	✓	-
NON-IC-RD-DP-010P-350-8	ELV/TRIAC/0-10V (ERP)	1.0%	Non-IC remote LED driver 350mA 8W 0-10V/Tre 1% DI	-	✓	✓	✓	✓	✓	-	-	✓	-
NON-IC-RD-DP-010P-350-14	ELV/TRIAC/0-10V (ERP)	1.0%	Non-IC remote LED driver 350mA 14W 0-10V/Tre 1% DI	-	✓	✓	✓	✓	-	✓	-	-	-

\* Dimming via ELV and Triac only compatible at 120VAC

\*\* Consult the factory for dimmer compatibility



## Placebo Suspended - Driver External

### Mounting Accessories Specifications


#### Installation with Junction Box

- Mounting Accessory selection required for use with Placebo
- Backplate / Cover Plate provides a cULus listed option for covering a 4x4 octagonal electrical box
- Plaster Plate provides a cULus listed option for covering a 4x4 octagonal electrical box with plaster finish
- Cover Plate / Plaster Plate Material: Stainless steel
- Cover Plate Finish: Powder Coat
- Cover Plate Thickness: 0.08"
- Cover Plate Weight: 0.7lbs

#### Plate Finish Options

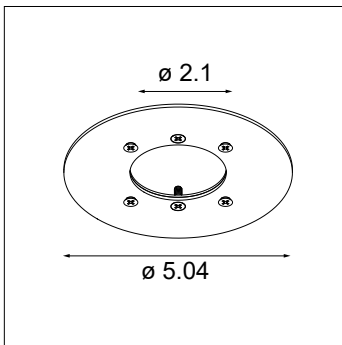


Backplate / Cover Plate




Plaster Plate

#### Installation without Junction Box

- Mounting Accessory required for use with Placebo
- Ceiling Cutout: Ø2-1/8"
- Connection Box Material: Aluminum
- Cover Box Weight: 0.12lbs

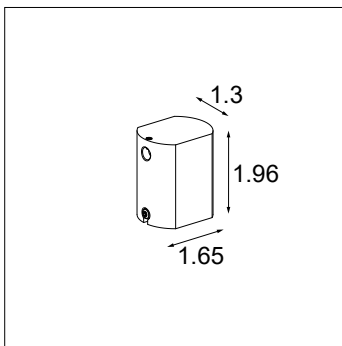

Connection Box  
for installation without junction box

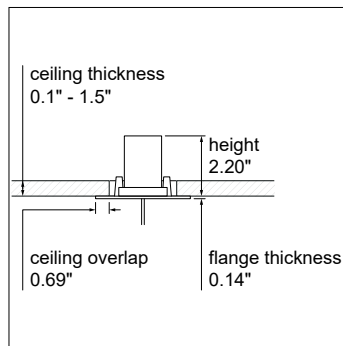

### Accessory Ordering Information

- PLACEBO-DE -


<b>BP-C</b>	Backplate Cover	<b>44</b>	4"x4" Junction Box	Placebo Driver External	<b>WHS</b>	White Structure
<b>PP</b>	Plaster Plate	<b>blank</b>	in case of Connection Box		<b>BLS</b>	Black Structure
<b>CB</b>	Connection Box				<b>blank</b>	in case of Plaster Plate or Connection Box

## Placebo Suspended - Driver External


### Shade Specifications

- Shades are optional (not required for use with Placebo)
- Shade material: Aluminum
- Exterior Finish: Paint or Paint with brushed metallic finish
- Interior Finish: Matte white (RAL 9002) Paint except with Sombrero which only has an exterior finish
- Sombrero only compatible with down Placebo version
- Weight: Douli – 1.1lbs  
Beanie - 1.98lbs  
Sombrero - 0.92lbs


### Finish Information

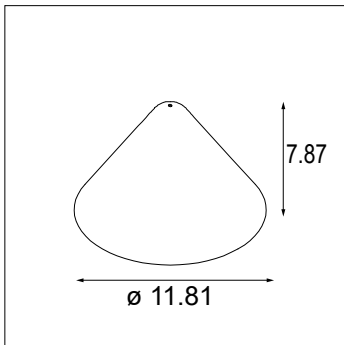

Placebo Douli



Placebo Beanie

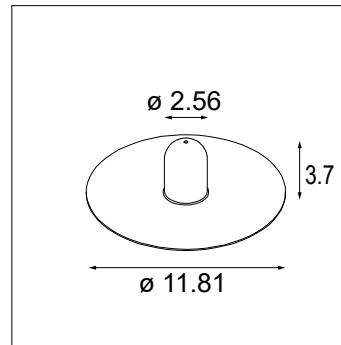

Placebo Sombrero

### Ordering Information

**PLACEBO**

**DOULIE**

**BEANIE**

**SOMBRERO**

**BLMT** Black Matte

**BR** Bronze



**CH** Champagne

**GWMT** Grey White  
Matte

## Placebo Suspended - Driver External

### Performance Specifications (per luminaire)

	Fixed CCT	Warm Dim
Weight		0.71lbs
Location		Damp
CRI*	93, R9: 65	94, R9: 69
Lifetime	L80 B20 @ 50,000 hrs	
UGR	see website	
Electrical (typical)**		
	350mA	350mA
Vf	18V	20.6V
Power**	6.3W	7.4W

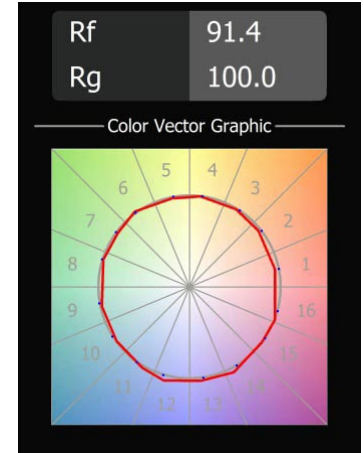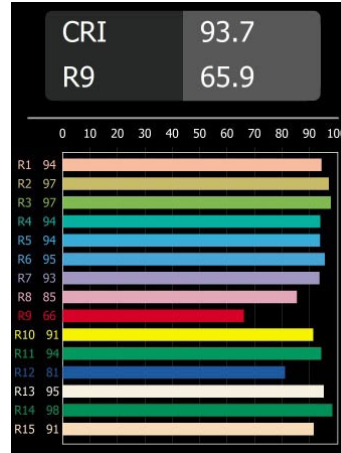

For photometric files see website or contact factory

\* CRI & TM-30 Value for 3000K

\*\* Power figures exclude remote driver

### Output Specifications

Performance is typical per head  
( ) indicates multipliers

Version	Reference Delivered Lumens	CCT	Optics
Down	626 (Ref: 3000K, Glass ball Ø6.1, no shade)	2700K (0.97) 3000K (1.0) 3500K (1.06)	Tube 1.8 (0.72) Tube 1.8 + Somb WHS (0.58) Tube 1.8 + Somb BLS (0.54) Tube 1.8 + Beanie (0.51) Tube 1.8 + Douli (0.50) Tube 5.1 (0.88) Tube 5.1 + Somb WHS (0.85) Tube 5.1 + Somb BLS (0.67) Tube 5.1 + Beanie (0.57) Tube 5.1 + Douli (0.62) Ball 3.5 (0.85) Ball 3.5 + Somb WHS (0.90) Ball 3.5 + Somb BLS (0.72) Ball 3.5 + Beanie (0.76) Ball 3.5 + Douli (0.72) Ball 6.1 (1.0) Ball 6.1 + Somb WHS (0.96) Ball 6.1 + Somb BLS (0.83) Ball 6.1 + Beanie (0.76) Ball 6.1 + Douli (0.75)
Up	626 (Ref: 3000K, Glass ball Ø6.1, no shade)	2700K (0.97) 3000K (1.0) 3500K (1.06)	Tube 1.8 (0.72) Tube 1.8 + Beanie (0.32) Tube 1.8 + Douli (0.16) Tube 5.1 (0.88) Tube 5.1 + Beanie (0.44) Tube 5.1 + Douli (0.39) Ball 3.5 (0.85) Ball 3.5 + Beanie (0.46) Ball 3.5 + Douli (0.31) Ball 6.1 (1.0) Ball 6.1 + Beanie (0.47) Ball 6.1 + Douli (0.42)

Example Calculation

To determine typical output for Down, 2700K, tube 5.1 + Beanie

$626 \times 0.97 \times 0.57 = 346$  lumen

### Listings and Certifications

- Damp location listed
- cUL & UL listed

### Warranty

Visit <https://www.supermodular.com/warranty>