


Overview

Glare-free working light



With a name derived from the verb 'evade', it is clear from the start that Vaeder will run a mile from the merely average. This new fixture feels equally at home in an energy-efficient, ergonomic office environment as in a home office. Its characteristic honeycomb structure in combination with a wafer-thin diffuser reduces glare to a minimum, whilst Vaeder's ground breaking LED lighting results in an energy-efficient and high performing office fixture.

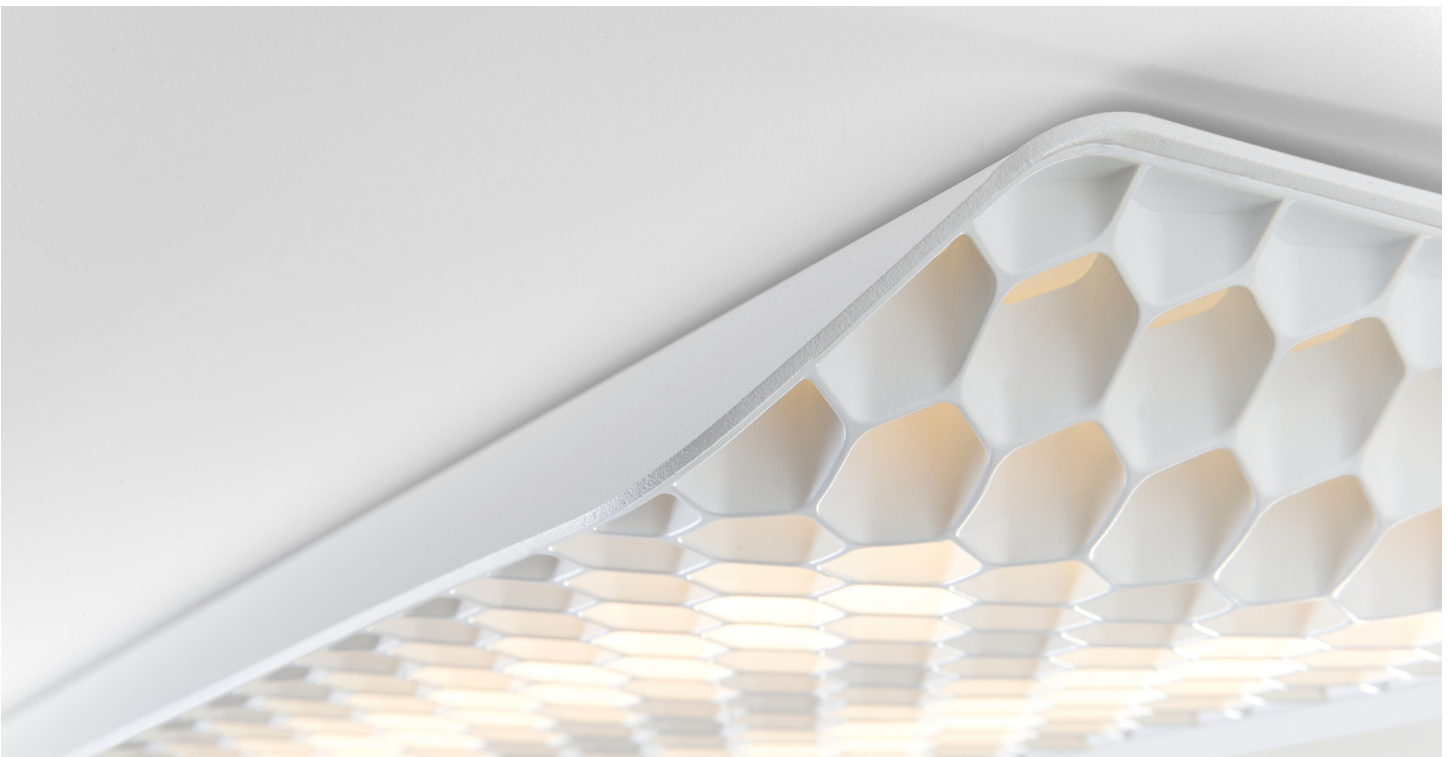


Specifications & Ordering Information

- Shell Material: Aluminum
- Honeycomb material: ABS (UV resistant)
- Finish: Powder coat
- Driver: Included in body
- Suspended version: cable can be adjusted during installation.
- Suspended version: Plaster finish plate for 4x4 octagonal junction box included

Finish Options

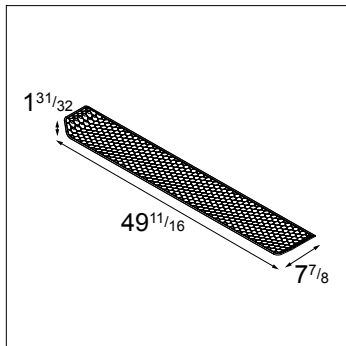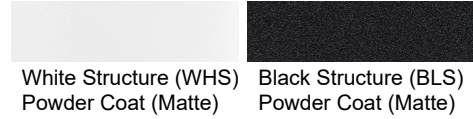

Vaeder Surface

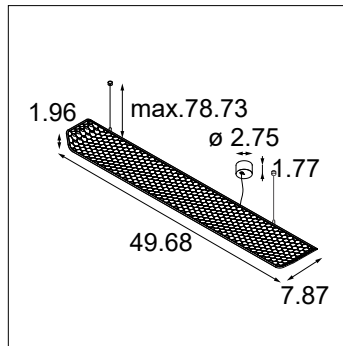

Vaeder Suspended

Ordering Information

- **30** - **DP** - **010V0-EL** - **DI** -

VAEDE-S-1X Vaeder Surface 1x	30 3000K	DP Damp Location	010V0-EL 0-10V dimming 0%	DI Driver Included	BLS-BLMT Black Ext. / Black Int.
VAEDE-SP-1X Vaeder Suspended 1x					BLS-WHMT Black Ext. / White Int.
					WHS-BLMT White Ext. / Black Int.
					WHS-WHMT White Ext. / White Int.

Driver Specifications



DRIVER	INPUT VOLTAGE	DIMMING TYPE	TYPICAL DIMMING LEVEL*	CONNECTED LOAD (TYPICAL)
010V0-EL	120-277VAC	0-10V	0%	37 W

* Consult the factory for dimmer compatibility

Performance Specifications (per fixture)

Weight	Surface - 9.24lbs Suspended - 10.34lbs
Location	Damp
CRI*	92, R9: 58
Lifetime	L80 B10 @ 50.000 hrs
Lumen Output	885lm (Black) 2245lm (White)
UGR	5 (Black) 17 (White)

For photometric files see website or contact factory

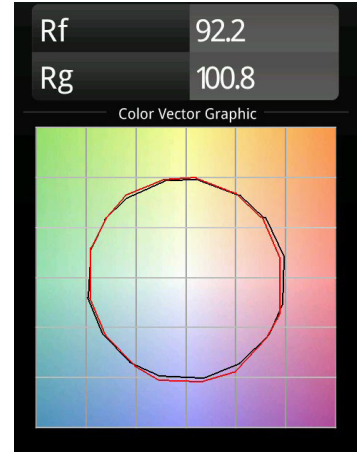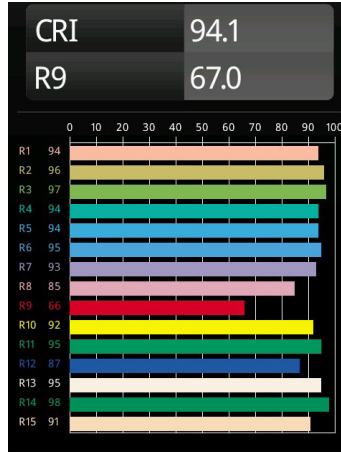

*CRI & TM-30 Value for 3000K

Listings and Certifications

- Damp location listed
- cUL & UL listed

Warranty

Visit <https://www.supermodular.com/warranty>