

Smart Cake Tube Track 48V Suspended 1.9


Overview



Smart Tube Track 48V Suspended is equipped with a 48V track adapter that makes our popular design one of many luminaires joining our Pista magnetic track rail. A long and thin matte black suspension cable holds our design at your perfect height and brings light and personality to your space.


How to Specify (example)

1. Select Tube → Page 2



Example: **SMARU-T48-SP-1.9-1X-DY-0101-WHS**
 Smart Tube Track 48V Suspended, dry rated, 0-10V, white structure

2. Select Lamp Unit → Page 3



Example: **SMART-C-R-1.9-1X-MG-30M-DP-DE-WHS**
 Smart Cake 1.9, microprismatic glass, 3000K, medium, damp rated, white structure


Example order:

| Quantity | Item |
|----------|--|
| 1 | SMARU-T48-SP-1.9-1X-DY-0101-WHS |
| 1 | SMART-C-R-1.9-1X-MG-30M-DP-DE-WHS |

Smart Cake Tube Track 48V Suspended 1.9

Luminaire Specifications

- For use with Pista 48V track systems
- Tube material: cast aluminum
- Tube finish: powder coat
- Cable finish: TPE
- Cable color: black
- Cable diameter: 0.14"
- Cable length is field adjustable
- Suitable for 1 lamp unit
- Upon insertion, fixtures attach magnetically to the track
- Fixtures can be moved in the track by sliding
- Force to remove from track: 13.5lbs

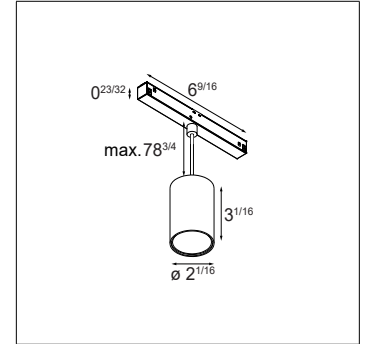


Smart Tube Track 48V Suspended 1x

Finish Information



Black Structure (BLS)
Powder Coat (Matte)



White Structure (WHS)
Powder Coat (Matte)

Pista Track Compatibility

| | Surface Track Suspended Track | Suspended Up / Down Track | | Recessed Flanged Track | Recessed Trimless Track |
|-----------------------------------|----------------------------------|---------------------------|--------------|---------------------------|----------------------------|
| | | Up Portion | Down Portion | | |
| Smart Tube Track 48V Suspended 1x | M | | M | M | M |

See separate track datasheets for track information and accessories


Ordering Information

| | | | | | | | | | |
|-------------------------|-----------------------------------|---|---------------------------|---|------------------------|---|-------------------|---|----------------------------|
| SMARU-T48-SP-1.9 | | - | 1X | - | DY | - | | - | |
| SMARU-T48-SP-1.9 | Smart Tube Track 48V Suspended | | 1X For 1 lamp unit | | DY Dry Location | | 0101 0-10V | | BLS Black Structure |
| | | | | | | | D DALI | | WHS White Structure |

Smart Cake Tube Track 48V Suspended 1.9

Lamp Specifications

- Aperture: 1.9"
- Trim material: cast aluminum
- Trim finish: powder coat or wet paint
- Must be combined with Tube




Smart Cake 1.9

Finish Information



Black Structure (BLS)
Powder Coat (Matte)



White Structure (WHS)
Powder Coat (Matte)



Gold (GOMT)
Wet Paint (Matte)

Ordering Information

| SMART-C-R-1.9-1X | | | | M | | DP | | DE | | | |
|-------------------------|-------------------------|-----------|----------------------|-----------|-------|----------|--------------|-----------|---------------|-------------|-----------------|
| SMART-C-R-1.9-1X | Smart Cake Recessed 1.9 | MG | Microprismatic Glass | 27 | 2700K | M | Medium (28°) | DP | Damp Location | BLS | Black Structure |
| | | | | 30 | 3000K | | | | | WHS | White Structure |
| | | | | 35 | 3500K | | | | | GOMT | Gold Matte |

Smart Cake Tube Track 48V Suspended 1.9

Performance Specifications (per luminaire)

| | |
|----------|----------------------|
| | 1x |
| Weight | 0.7lbs |
| Location | dry |
| CRI* | 92, R9: 60 |
| Lifetime | L80 B20 @ 50,000 hrs |
| UGR | see website |



Electrical (typical)

| Lamp Units | Dim Type | Input Voltage | Connected Load | Dim Level*** |
|--------------|----------|---------------|----------------|--------------|
| 1x Fixed CCT | 0-10V | 48VDC | 6.5W | 1% |
| 1x Fixed CCT | DALI** | 48VDC | 6.5W | 1% |

* CRI & TM-30 Value for 3000K

** Compatible with Casambi Wireless Pista Module. See track datasheets for more details

*** Consult the factory for dimmer compatibility

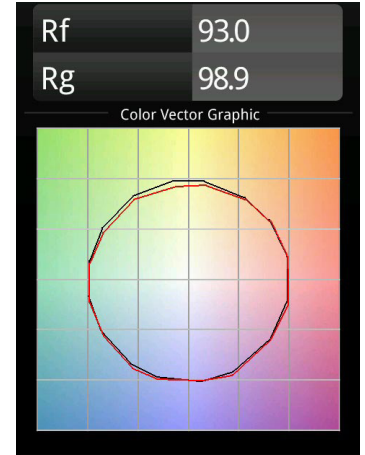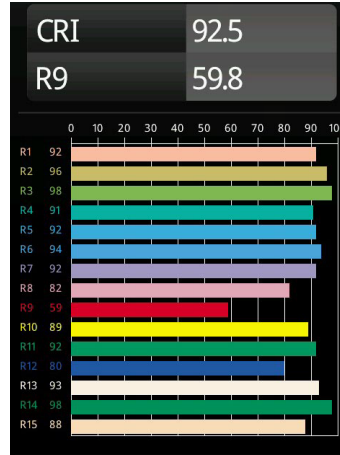

For photometric files see website or contact factory.

Output Specifications (per lamp unit)

| Reference Delivered Lumens | CCT | Optics | Finish |
|------------------------------------|--|-------------|---|
| 216 (ref. 3000K, MG M, 500mA, WHS) | 2700K (0.87) 3000K (1.00) 3500K (0.92) | MG M (1.00) | BLS (0.90) WHS (1.00) GOMT (0.95) |

Multipliers are indicated between brackets: ()

Example calculation, to determine typical output for 2700K, Microprismatic Glass, Medium, Black Structure: $216 \times (0.87) \times (1.00) \times (0.90) = 169$ lumens

Listings and Certifications

- Classified: cULus
- Dry locations



Warranty

- Visit <https://www.supermodular.com/en-us/warranty>