

## *Minude Track 48V Adjustable 1.8*

### **Overview**

#### **Bare and minimalistic, it's all in the twist**

Our new miniature spot is an extremely simple cylinder-shaped light fixture with a lot to show. Endless applications, a variety of rich colors, phenomenal yogic flexibility. A deep-recessed light source for a glare-free light effect. To express a refined and minimalistic look & feel on walls or low ceiling executions, or to add on, as a stylish companion on our Pista track system. This little spot will make a big impression.




## Minute Track 48V Adjustable 1.8


### Luminaire Specifications & Ordering Information

- For use with Pista 48V track systems
- Aperture: 1.7"
- Body Material: Machined aluminum
- Finish: Powder coat or anodized
- Stem is always black
- Fixtures attach magnetically to the track and can be moved by sliding.
- Force to remove from track: 13.5lbs

### Finish Information



Minute 1X

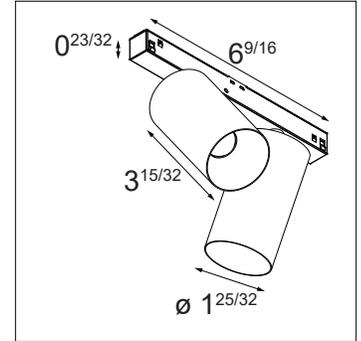

Minute 2X

### Pista Track Compatibility

	SURFACE / SUSPENDED TRACK	SUSPENDED UP / DOWN TRACK		RECESSED FLANGED TRACK	RECESSED TRIMLESS TRACK
		UP PORTION	DOWN PORTION		
Minute 1.8 1X	Ⓜ		Ⓜ	Ⓜ	Ⓜ
Minute 1.8 2X	Ⓜ		Ⓜ	Ⓜ	Ⓜ

See separate track datasheets for track information and accessories

### Ordering Information

MINUD-T48-A-1.8				M	DY		DI							
Minute Track 48V Adjustable 1.8	1X	1 Lamp	27	2700K	M	Lens Medium (25°)	DY	Dry Location	0101	0-10V	DI	Driver Included	WHS	White Structure
	2X	2 Lamp	30	3000K					D	DALI			BLS	Black Structure
			35	3500K									BLBA	Anodized Black
													BRBA	Anodized Bronze
													CHBA	Anodized Champagne
													SBBA	Anodized Silver Bronze

## Minute Track 48V Adjustable 1.8

### Performance Specifications (per luminaire)

	1X	2X
Weight	0.5lbs	0.9lbs
Adjustability	360° x 90°	
Location	Dry	
CRI*	92, R9: 71	
Lifetime	L80 B20 @ 50,000 hrs	
UGR	see website	



#### Electrical (typical)

	Dim Type	Input Voltage	Connected Load	Dimming Level***
1X	0-10V	48VDC	11W	1%
2X	0-10V	48VDC	19.5W	1%
1X	DALI**	48VDC	11W	1%
2X	DALI**	48VDC	19.5W	1%

\* CRI & TM-30 Value for 3000K

\*\* Compatible with Casambi Wireless Pista Module. See track datasheets for more details.

\*\*\* Consult the factory for dimmer compatibility

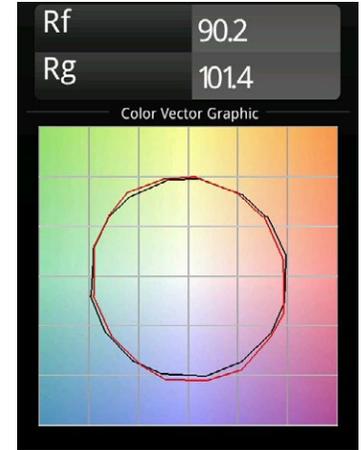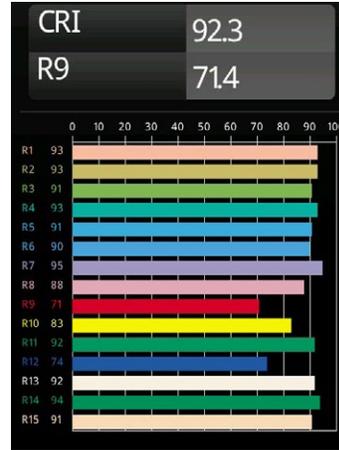

For photometric files see website or contact factory

### Output Specifications

Performance per head  
Reference is 3000K, medium beam, White  
( ) indicates multipliers

Reference Delivered Lumens	CCT	Optics	Finish
610	2700K (0.98) 3000K (1.0) 3500K (1.06)	LM (1.0)	WHS (1.0) BLS (0.97) BLBA (0.98) BRBA (1.0) CHBA (1.01) SBBA (1.0)

#### Example Calculation

To determine typical output for 2700K, Medium in Black:

$$610 \times 0.98 \times 1.0 \times 0.97 = 580 \text{ lumen}$$

### Listings and Certifications

- Dry location listed
- cUL & UL listed

### Warranty

Visit <https://www.supermodular.com/warranty>