

Wink 82 Recessed Ring 110


14203030





Drive Current (mA)	Forward Voltage		Power
	min (Vf)	max (Vf)	(W)
350	16,5	19,2	6,2
500	17,1	19,8	9,2

For serial connection, respect polarity!



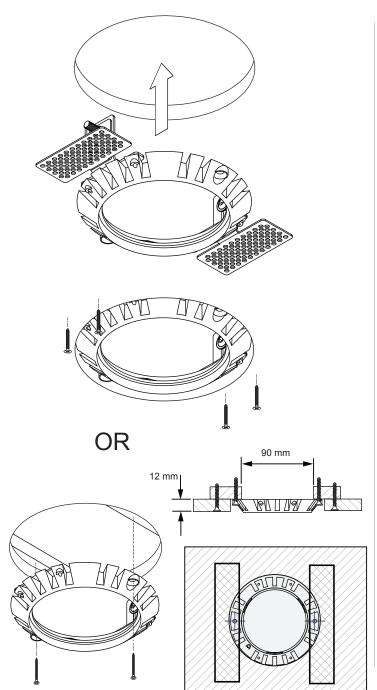







INSTALL

UNINSTALL







Replace protective shield when broken. The luminaire shall only be used complete with its protective shield. Reference number: 1011764 - ASY 1012931




LIGHT SOURCE - DO NOT TOUCH LED Touching the LED can result in permanent damage of the

light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Always be properly grounded when touching leads or circuitry inside the luminaire. Use a wrist strap connected by a ground cord to the housing. Avoid touching the light sources with bare hands.



For latest version of driver matrix and availlable accessories check www.supermodular.com or connect with your sales contact.











