

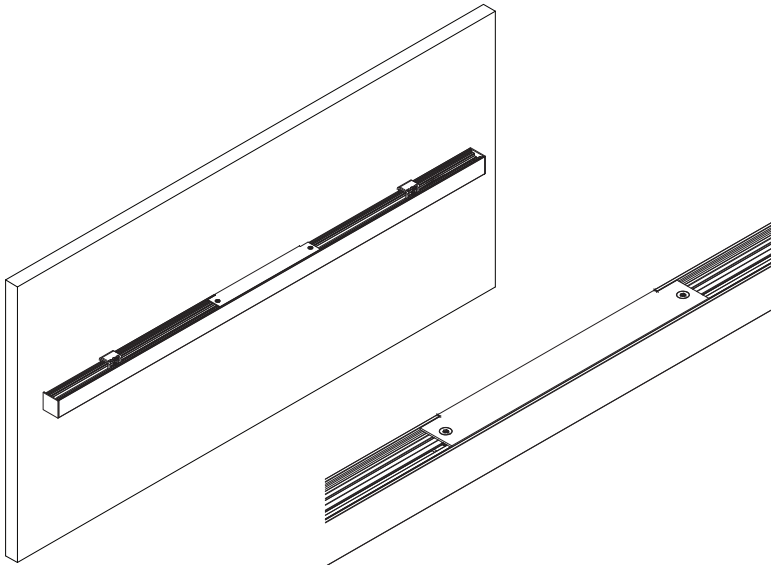
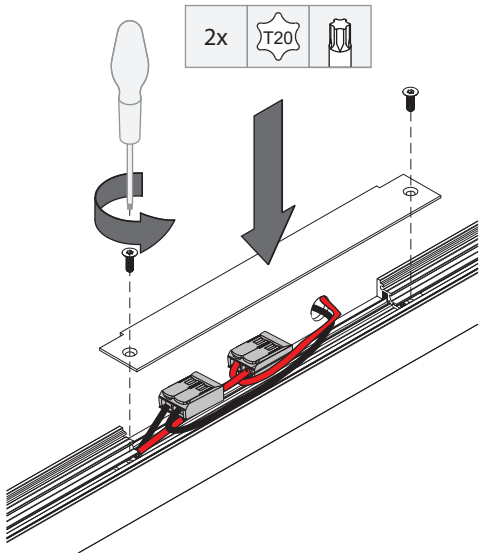



SLD35 LEDSTRIP 24V connection wall


93470504

OPEN PROFILE

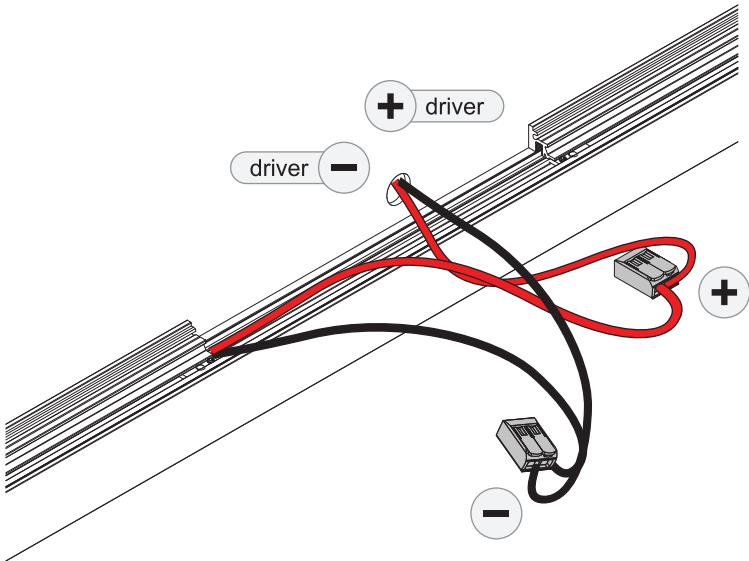

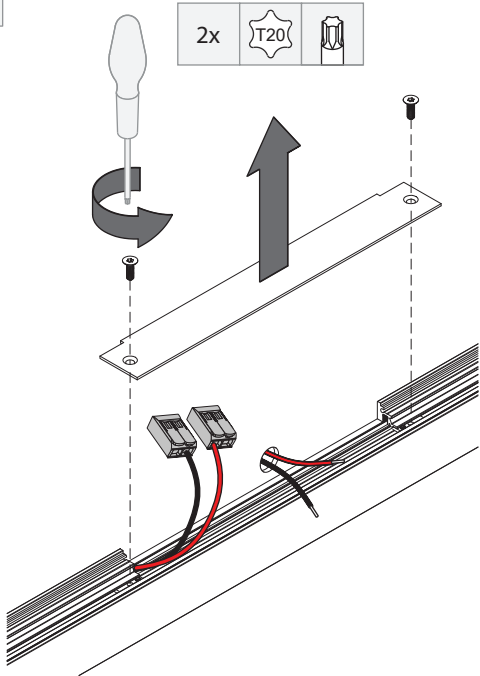



On site conditions (e.g. heat, humidity, ...) can lead to expansion of the diffusor. Therefor onsite shortening of the diffusor can be required



Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.  
Reference number: SLD50 Poly In (1012155) - SLD50 Prismatic (1012157) - SLD50 Poly Out (1012157)



**LIGHT SOURCE - DO NOT TOUCH LED**  
Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



**PREVENTING ELECTROSTATIC DAMAGE**  
A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.