



IC BOX ULTRA AIR TIGHT Qbini - 3x LED - DI 0-10V/TRE

US_12067201_US_12067203

1 SLIDE MATING HALVES TOGETHER

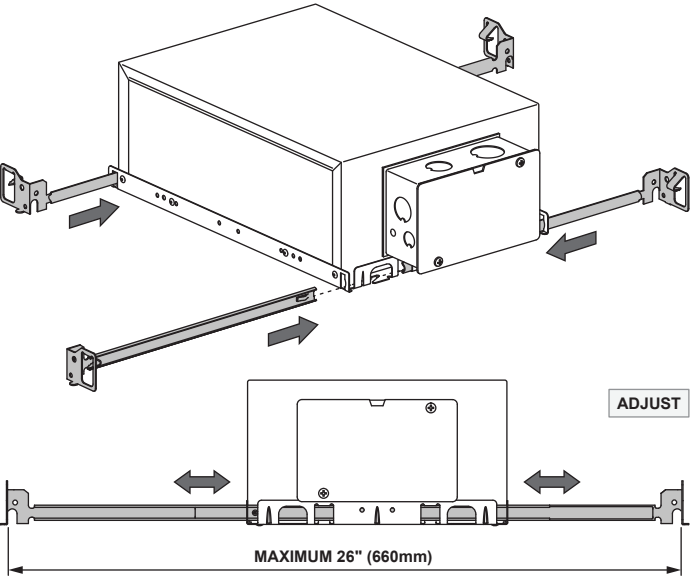


2A STUD CEILING




FASTENERS NOT INCLUDED

2B T-BAR GRID CEILING




FASTENERS NOT INCLUDED

3 CHECK HOLE POSITION

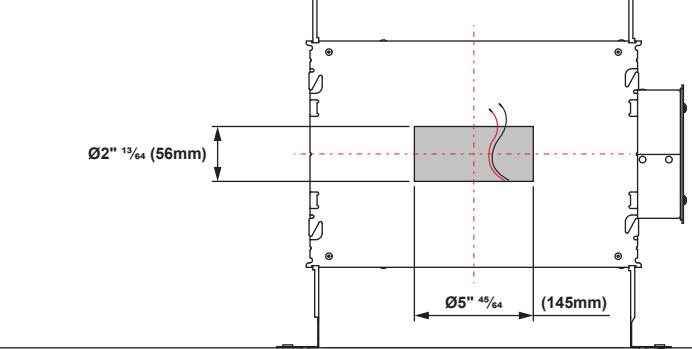


4 OPEN JUNCTION BOX & ATTACH CONDUIT

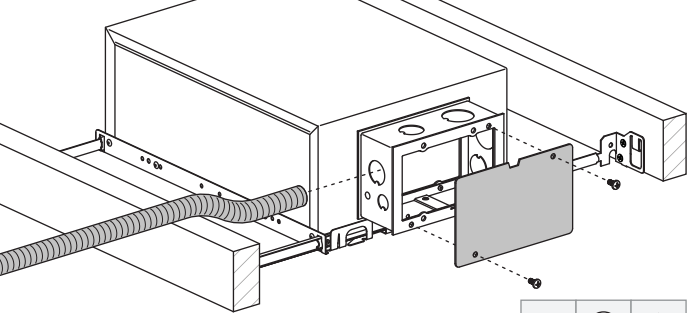


USE APPROPRIATE CONDUIT CLAMP (NOT INCLUDED)

2x

5 MAKE ELECTRICAL CONNECTION

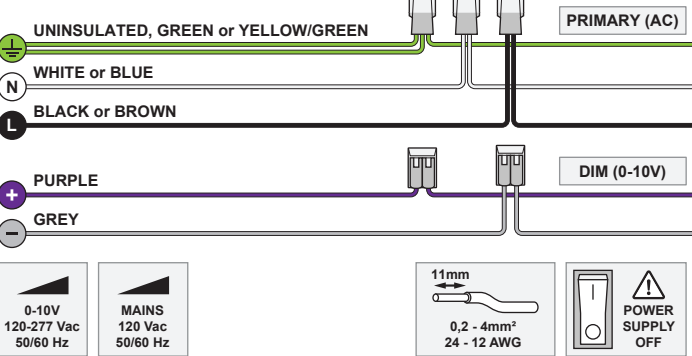


6 CLOSE JUNCTION BOX COVER, INSTALL CEILING & INSTALL QBINI FRAME

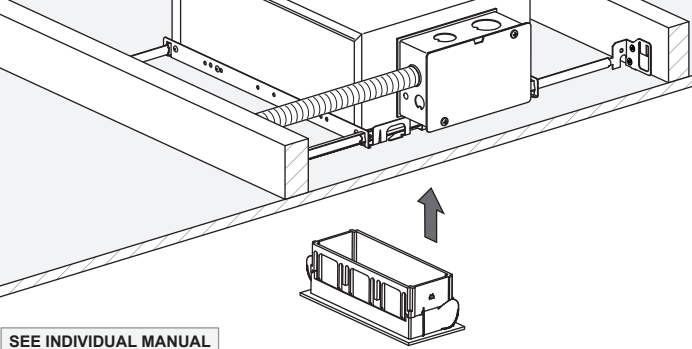

SEE INDIVIDUAL MANUAL

7 CONNECT & INSTALL LIGHT ENGINES

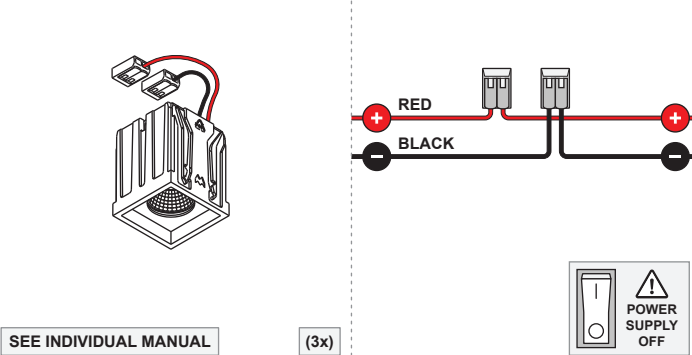

SEE INDIVIDUAL MANUAL

(3x)

POWER SUPPLY OFF

LED RECESSED LUMINAIRE BOX - TYPE IC

IMPORTANT SAFETY INSTRUCTIONS

- Read all instructions.
- Save these instructions.

BASIC SAFETY PRECAUTIONS

- Min. 60°C supply conductors.
- Inherently protected.



PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Always be properly grounded when touching leads or circuitry inside the luminaire. Use a wrist strap connected by a ground cord to the housing. Avoid touching the light sources with bare hands.

MUST BE COMBINED WITH

(NOT INCLUDED)

- Qbini 3x frame (1x) , and
- Qbini light engine (3x)

LIGHT ENGINES & ACCESSORIES

For latest version of all light engines and available accessories check www.supermodular.us or connect with your sales contact.

Meets the Airtight Energy Codes:
"ultra airtight IC (<0.2 cfm)"

0-10V

R,C

