


Marbulito Track 48V Adjustable

Overview

Taking accent lighting to the next level

Designed specifically for Pista's magnetic track rails, Marbulito takes accent lighting to the next level. With a diameter of 1.6in (41mm), Marbulito matches perfectly the thin and slim look of Pista. But there's more to love about this little stunner...

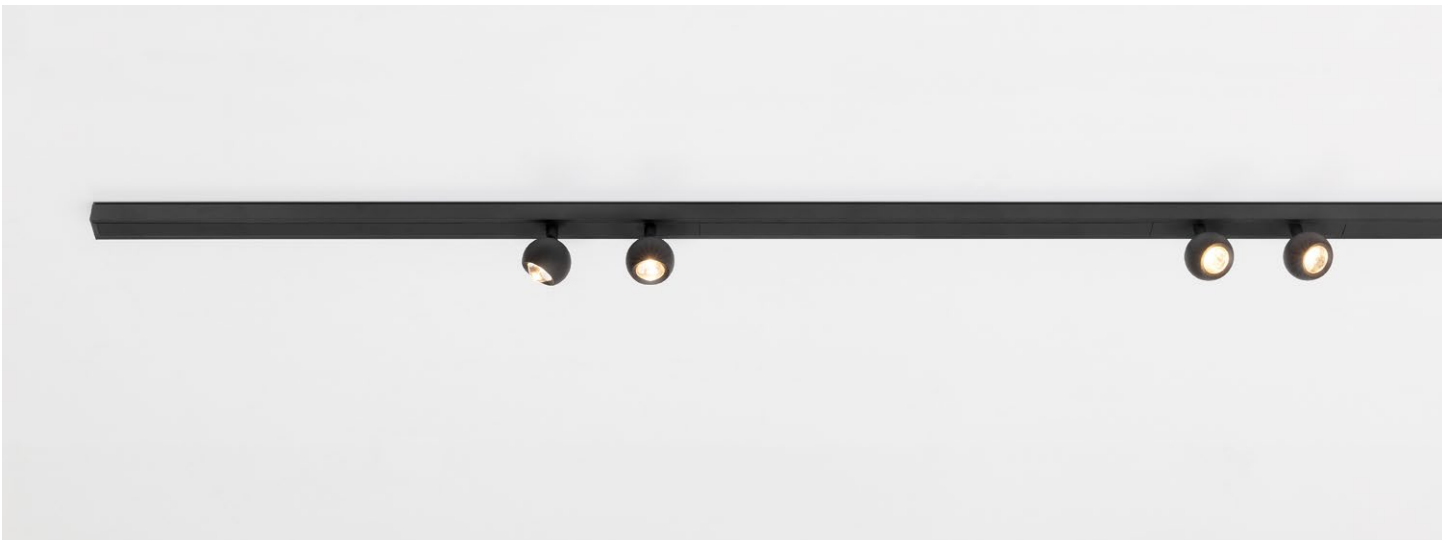




Marbulito Track 48V Adjustable

Luminaire Specifications & Ordering Information


- For use with Pista 48V track systems
- Body Material: Cast Aluminum
- Finish: Powder coat
- Inner glare control ring: always matte black
- Fixtures attach magnetically to the track and can be moved by sliding.
- Force to remove from track: 13.5lbs

Finish Information

	
White Structure (WHS) Powder Coat (Matte)	Black Structure (BLS) Powder Coat (Matte)





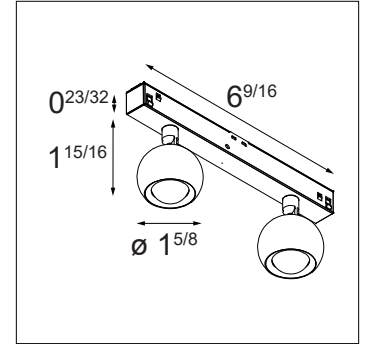





Marbulito 1X



Marbulito 2X

Pista Track Compatibility

	SURFACE / SUSPENDED TRACK	SUSPENDED UP / DOWN TRACK		RECESSED FLANGED TRACK	RECESSED TRIMLESS TRACK
		UP PORTION	DOWN PORTION		
Marbulito 1X					
Marbulito 2X					

See separate track datasheets for track information and accessories

Ordering Information

MARLIT-T48-A-1.6	-	-	M	-	DY	-	-	DI	-
1X 1 Lamp	27 2700K	M Lens Medium (25°)	DY Dry Location	0101 0-10V	WHS White Structure				
2X 2 Lamp	30 3000K			D DALI	BKS Black Structure				
	35 3500K								

Marbulito Track 48V Adjustable

Performance Specifications (per luminaire)

	1X	2X
Weight	0.2Xbs	0.4lbs
Adjustability	360° x 50°	
Location	Dry	
CRI*	92, R9: 59	
Lifetime	L80 B20 @ 50,000 hrs	
UGR	see website	



Electrical (typical)

	Dim Type	Input Voltage	Connected Load	Dimming Level***
1X	0-10V	48VDC	6.5W	1%
2X	0-10V	48VDC	10.5W	1%
1X	DALI**	48VDC	6.5W	1%
2X	DALI**	48VDC	10.5W	1%

* CRI & TM-30 Value for 3000K

** Compatible with Casambi Wireless Pista Module. See track datasheets for more details.

*** Consult the factory for dimmer compatibility

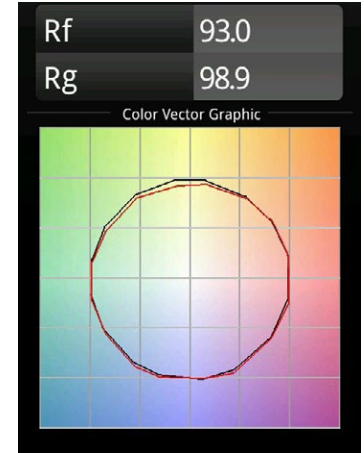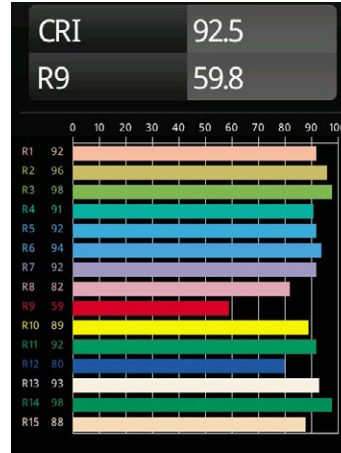

For photometric files see website or contact factory

Output Specifications

Performance per head
Reference is 3000K, medium beam, White
() indicates multipliers

Reference Delivered Lumens	CCT	Optics	Finish
322	2700K (1.0) 3000K (1.0) 3500K (1.0)	LM (1.0)	WHS (1.0) BKS (1.0)

Example Calculation

To determine typical output for 2700K, Medium in Black:

$$322 \times 1.0 \times 1.0 \times 1.0 = 322 \text{ lumen}$$

Listings and Certifications

- Dry location listed
- cUL & UL listed

Warranty

Visit <https://www.supermodular.us/warranty>