


## Marbulito Track 48V Adjustable 1.6

### Overview

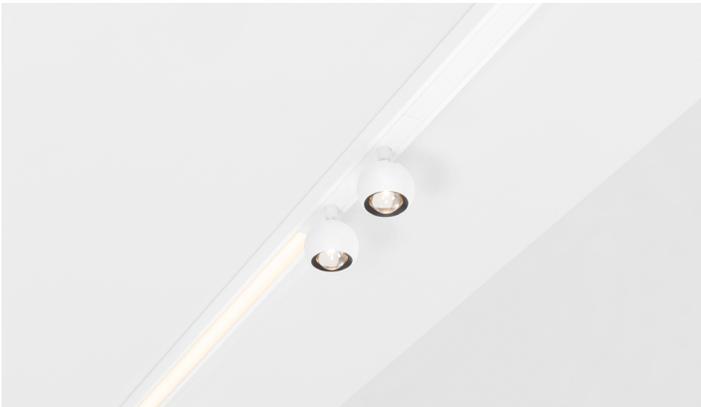

### Taking accent lighting to the next level.

Designed specifically for Pista's magnetic track rails, Marbulito takes accent lighting to the next level. With a diameter of 1.6 inch (41mm), Marbulito matches perfectly the thin and slim look of Pista. But there's more to love about this little stunner...

## Marbulito Track 48V Adjustable 1.6

### Luminaire Specifications

- For use with Pista 48V track systems
- Body material: aluminum
- Body finish: powder coat
- Inner glare control ring is always black
- Upon insertion, fixtures attach magnetically to the track
- Fixtures can be moved in the track by sliding
- Force to remove from track: 13.5lbs


### Finish Information




Black Structure (BLS)  
Powder Coat (Matte)



White Structure (WHS)  
Powder Coat (Matte)



Marbulito Track 48V Adjustable 1.6 1x

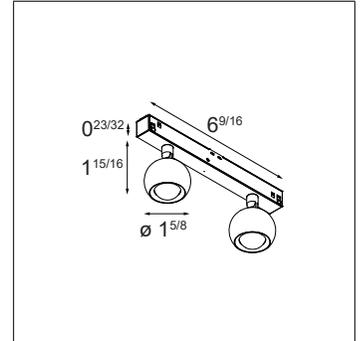

Marbulito Track 48V Adjustable 1.6 2x

### Pista Track Compatibility

	Surface Track Suspended Track	Suspended Up / Down Track		Recessed Flanged Track	Recessed Trimless Track
		Up Portion	Down Portion		
Marbulito Track 48V Adjustable 1.6 1x	Ⓜ		Ⓜ	Ⓜ	Ⓜ
Marbulito Track 48V Adjustable 1.6 2x	Ⓜ		Ⓜ	Ⓜ	Ⓜ

See separate track datasheets for track information and accessories

### Ordering Information

MARLI-T48-A-1.6			M	DY		
Marbulito Track 48V Adjustable 1.6	<b>1X</b> 1 Lamp	<b>27</b> 2700K	<b>M</b> Medium (25°)	<b>DY</b> Dry Location	<b>0101</b> 0-10V	<b>BLS</b> Black Structure
	<b>2X</b> 2 Lamp	<b>30</b> 3000K			<b>D</b> DALI	<b>WHS</b> White Structure
		<b>35</b> 3500K				

## Marbulito Track 48V Adjustable 1.6

### Performance Specifications (per luminaire)

	1x	2x
Weight	0.2lbs	0.4lbs
Adjustability	360° x 50°	360° x 50°
Location	dry	dry
CRI*	92, R9: 59	92, R9: 59
Lifetime	L80 B20 @ 50,000 hrs	L80 B20 @ 50,000 hrs
UGR	see website	see website


#### Electrical (typical)

Lamp Units	Dim Type	Input Voltage	Connected Load	Dim Level***
1x Fixed CCT	0-10V	48VDC	6.5W	1%
1x Fixed CCT	DALI**	48VDC	6.5W	1%
2x Fixed CCT	0-10V	48VDC	10.5W	1%
2x Fixed CCT	DALI**	48VDC	10.5W	1%

\* CRI & TM-30 Value for 3000K

\*\* Compatible with Casambi Wireless Pista Module. See track datasheets for more details

\*\*\* Consult the factory for dimmer compatibility

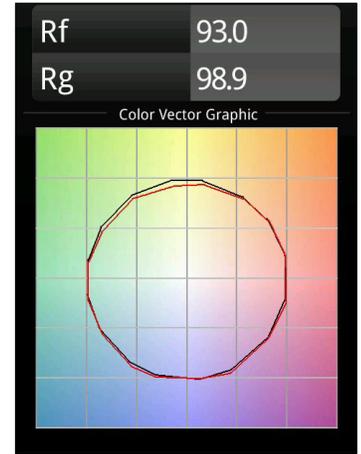

For photometric files see website or contact factory.

### Output Specifications (per head)

Reference Delivered Lumens	CCT	Optics	Finish
322 (ref. 3000K, M, WHS)	2700K (1.00) 3000K (1.00) 3500K (1.00)	M (1.00)	BLS (1.00) WHS (1.00)

Multipliers are indicated between brackets: ( )

Example calculation, to determine typical output for 2700K, Medium, Black Structure:  $610 \times (0.98) \times (1.00) \times (0.97) = 579$  lumens

### Listings and Certifications

- Classified: cULus
- Dry locations



### Warranty

- Visit <https://www.supermodular.com/en-us/warranty>