


Thimble Recessed Trimless 70 1x IP55 LED Spot DE


116222XX\_116223XX

1 CHOOSE INSTALLATION ACCESSORY - NOT INCLUDED


Recessed Trimless Ring Ø70  
11624530




Plaster Kit Recessed Trimless 150x150 - Ø70  
11624630





Concrete ring Ø70 for standard concrete boxes  
11624430



Concrete kit 150x150 - Ø70  
11624230




2





ELECTRICAL SPECS LED-FIXTURE

Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	11,2	13,2	4,1
500	11,2	13,2	6,1
+ RED		- BLACK	
For serial connection, respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.			

3

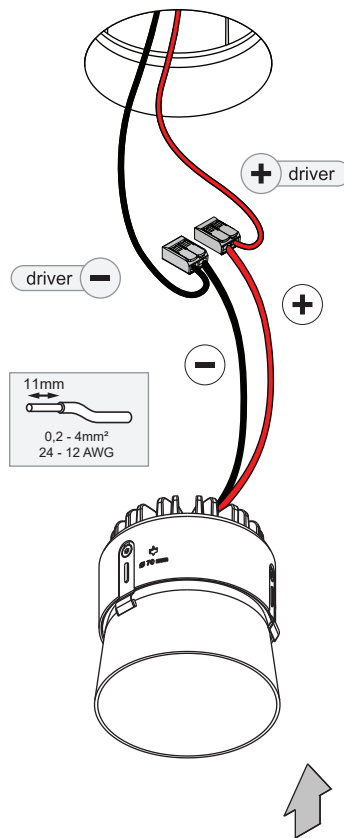

4



Replace protective shield when broken.  
The luminaire shall only be used complete  
with its protective shield.  
Reference number: 1014378



LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent  
damage of the light source. The light source  
and/or driver contained in this luminaire shall  
only be replaced by the manufacturer or his  
service agent or a similar qualified person.




PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may  
damage sensitive components. Therefore  
do not touch the LED nor the stripped  
parts of the wires with bare hands. Always  
be properly insulated by using ESD  
gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available  
accessories check [www.supermodular.com](http://www.supermodular.com) or  
connect with your sales contact.

Minimum volume requirement – with driver

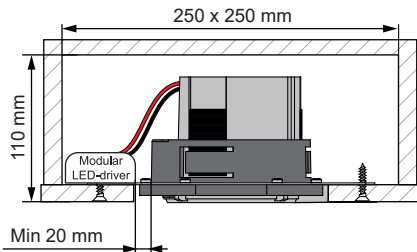

Minimum volume requirement – without driver

