


Thimble Recessed Trimless Adjustable 70 1x LED Spot DE


116232XX_116233XX

1 CHOOSE INSTALLATION ACCESSORY - NOT INCLUDED


Recessed Trimless Ring Ø70
11624530




Plaster Kit Recessed Trimless 150x150 - Ø70
11624630



Concrete ring Ø70 for standard concrete boxes
11624430



Concrete kit 150x150 - Ø70
11624230




2



+ driver


driver -





ELECTRICAL SPECS LED-FIXTURE

Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	11,2	13,2	4,1
500	11,2	13,2	6,1
+ RED		- BLACK	
For serial connection, respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.			

3

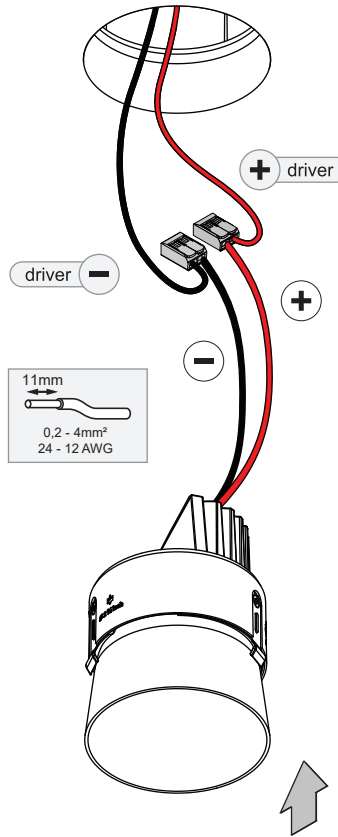

4



Replace protective shield when broken.
The luminaire shall only be used complete
with its protective shield.
Reference number: 1014378



LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent
damage of the light source. The light source
and/ or driver contained in this luminaire shall
only be replaced by the manufacturer or his
service agent or a similar qualified person.




PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may
damage sensitive components. Therefore
do not touch the LED nor the stripped
parts of the wires with bare hands. Always
be properly insulated by using ESD
gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available
accessories check www.supermodular.com or
connect with your sales contact.

Minimum volume requirement – with driver

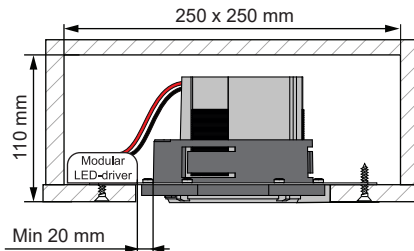

Minimum volume requirement – without driver

