


SLD 25 - SUSPENDED

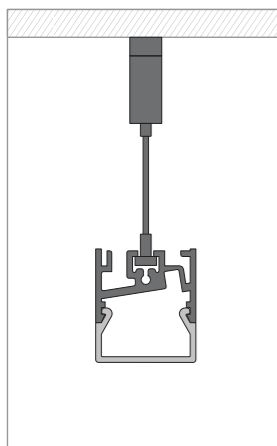

Base profile + diffuser
 US_93441209 (white struc)
 US_93441232 (black struc)
 US_93441282 (bronze)
 US_93441284 (silver bronze)
 US_93441241 (champagne)

Connection 180°
 US_93440050

Suspension kit (cable length: 4m)
 US_93000850 (white struc)
 US_93000851 (black struc)

Connection 90°
 US_93440060

Suspension hinge
 US_93001109 (white struc)
 US_93001132 (black struc)

Suspension canopy
 US_93461009 (white struc)
 US_93461032 (black struc)

Power feed cable (length: per m)
 US_93001300

LED strip 24V connection
 US_93440506

Diffuser out
 US_93440003

Endplate
 US_93449181 (white struc)
 US_93448181 (black struc)
 US_93448118 (bronze)
 US_93448106 (silver bronze)
 US_93448117 (champagne)

LED strip options
 (always mounted by Modular)
 US_93000013 (2700K) (1000lm/m)
 US_93000014 (3000K) (1000lm/m)
 US_93000015 (3500K) (1000lm/m)
 US_93000047 (2700K) (2000lm/m)
 US_93000048 (3000K) (2000lm/m)
 US_93000049 (3500K) (2000lm/m)

For conversion
 (meters to feet)
 1m = 3.28ft