


# LED driver 350-700mA 12W dali


13551630

## WIRING DIAGRAM



**⚠ SERIAL CONNECTION, RESPECT POLARITY**

DRIVER WITH 1 x LED OUTPUT

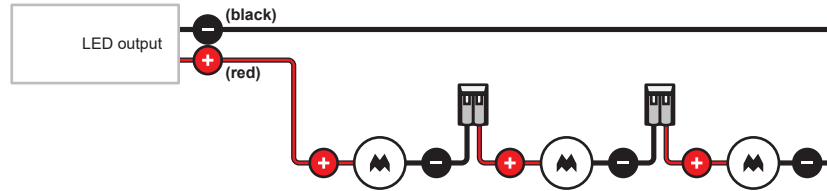

## ELECTRICAL CHARACTERISTICS

**NOMINAL INPUT VOLTAGE RANGE AC**  
100 - 240V

**INPUT FREQUENCY RANGE**  
50...60HZ

**MAXIMUM OUTPUT POWER**  
12W


**TEMPERATURE**  
Tc = 80°C  
Ta = -20...+50°C

**EFFICIENCY AT FULL LOAD**  
82%


**TYPICAL CURRENT OUTPUT RIPPLE**  
≤ 3%

**MAXIMUM DRIVERS ON MCB 16A TYPE B**  
16

## DIMENSIONS

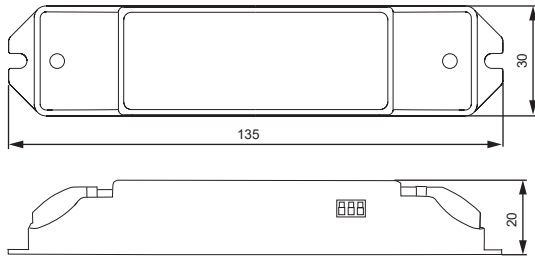

## MINIMUM HEIGHT TO TILT IN DRIVER

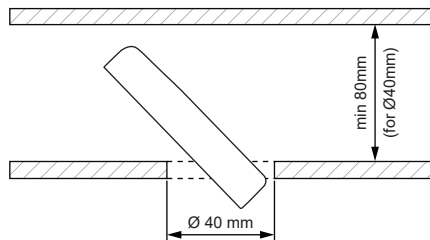

## OPERATING WINDOW

<b>350mA</b>	3.5 - 8.4W	9-24Vdc	ON OFF	1 2 3
<b>500mA</b>	5 - 12W	9-24Vdc	ON OFF	1 2 3
<b>700mA</b>	7 - 12W	9-17Vdc	ON OFF	1 2 3

## OPERATING MODE

- Dimming interface: DALI 2
- 0.01% dimming depth

## FIXTURES & ACCESSORIES

For latest version of driver matrix and available accessories check [www.supermodular.com](http://www.supermodular.com) or connect with your sales contact.

