

ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

Smart Recessed Adjustable 82 - Cake-Kup-Lotis

Modular Lighting Instruments



EPD HUB

Publishing 2024-04-15

GENERAL INFORMATION

MANUFACTURER

Manufacturer	Modular Lighting Instruments
Address	Armoedestraat 71 - 8800 Roeselare - BELGIUM
Contact details	sustainability@supermodular.com
Website	www.supermodular.com

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022
Sector	Electrical product
Category of EPD	Pre-verified EPD
Scope of the EPD	Cradle to gate with options, A4-B7, and modules C1-C4, D
EPD author	Sustainability Signify
EPD verification	Independent verification of this EPD and data, according to ISO 14025: ☒ Internal certification ☐ External verification

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of lighting products may not be comparable if they do not comply with EN 15804 and if they are not compared in a lighting context.

PRODUCT

Product name	Smart Recessed Adjustable 82 - Cake-Kup-Lotis
Additional labels	
Product reference	915005518901
Place of production	Belgium
Period for data	2022
Averaging in EPD	No averaging
Variation in GWP-fossil for A1-A3	%

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 unit
Declared unit mass	0.196 kg
GWP-fossil, A1-A3 (kgCO ₂ e)	5.23E+00
GWP-total, A1-A3 (kgCO ₂ e)	5.10E+00
Secondary material, inputs (%)	14.9
Secondary material, outputs (%)	60.3
Total energy use, A1-A3 (kWh)	19
Total water use, A1-A3 (m ³ e)	0.04

PRODUCT AND MANUFACTURER

ABOUT THE MANUFACTURER

Belgian architectural lighting since 1980. Creating beautifully crafted products that break the boundaries of technical limitations. Our ambition since the start. Over the years, we have built the reputation of being innovators and pioneers in the architectural lighting world. Today, staying true to our core values, we continue offering a full portfolio to challenge your thinking.

For more information, please visit: www.supermodular.com.

PRODUCT DESCRIPTION

The 3 original designs, Smart Kup, Lotis and Cake still manage to steal the hearts of interior designers. And this goes for the entire Smart family. Smart's accessibility and extreme versatility are arguably fit for any expression. Mix and match accent lighting, up and downlight, fixed or adjustable, a mosaic of shapes, sizes, colours and mounting options, and create a playful installation.

For more information, please visit:
<https://www.supermodular.com/en/products/smart--f-48662/>

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	86.43	EU, APAC, NAM
Minerals	0	APAC
Fossil materials	13.57	EU, APAC, NAM
Bio-based materials	0	Not applicable

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0.03

FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 unit
Mass per declared unit	0.196 kg
Functional unit	552 lumens over 50000 hours
Reference service life	50000

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

PRODUCT LIFE-CYCLE

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	x	x	MNR	MNR	MNR	MNR	MNR	x	MNR	MNR	x	x	x	x		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not declared = MNR. Modules not relevant = MNR.

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, electricity, and waste formed in the production processes at Modular's manufacturing facilities are included in this stage. The product is made of metals, plastics, and electronic components. All components are transported to Modular's production facility, where the main manufacturing processes primarily are associated with assembly. The finished product is packaged with polyethylene, cardboard, and/or paper as packaging material before being sent to customers. Manufacturing loss, ancillaries and wastes are calculated according to the data that each manufacturing site is sharing with Modular. The total annual amount of waste in kg is allocated to the total annual production in kg at the specific manufacturing site responsible for the production of the studied luminaire. Thus, it is possible to allocate it according to the weight of the product analysed in this study. Some of the waste are due to ancillary materials used during manufacturing while the rest is due to material losses.

TRANSPORT AND INSTALLATION (A4-A5)

Transport distances were calculated on the base of the supplier location and manufacturing location and then made a cumulative group choosing the conservative scenario. Environmental impacts from installation include waste packaging materials (A5). The impacts of energy consumption and the used ancillary materials during installation are considered negligible.


PRODUCT USE AND MAINTENANCE (B1-B7)

During the use phase, the product consumes electricity from Europe's electricity grid mix (B6). The total power consumption of the reference product is calculated as follows: Wattage x Reference lifetime = kWh consumed throughout the entire use phase B6.

PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. Transportation distance to treatment is assumed as 150 km and the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and loads of incineration and recycling are included in Module D.

SYSTEM BOUNDARY

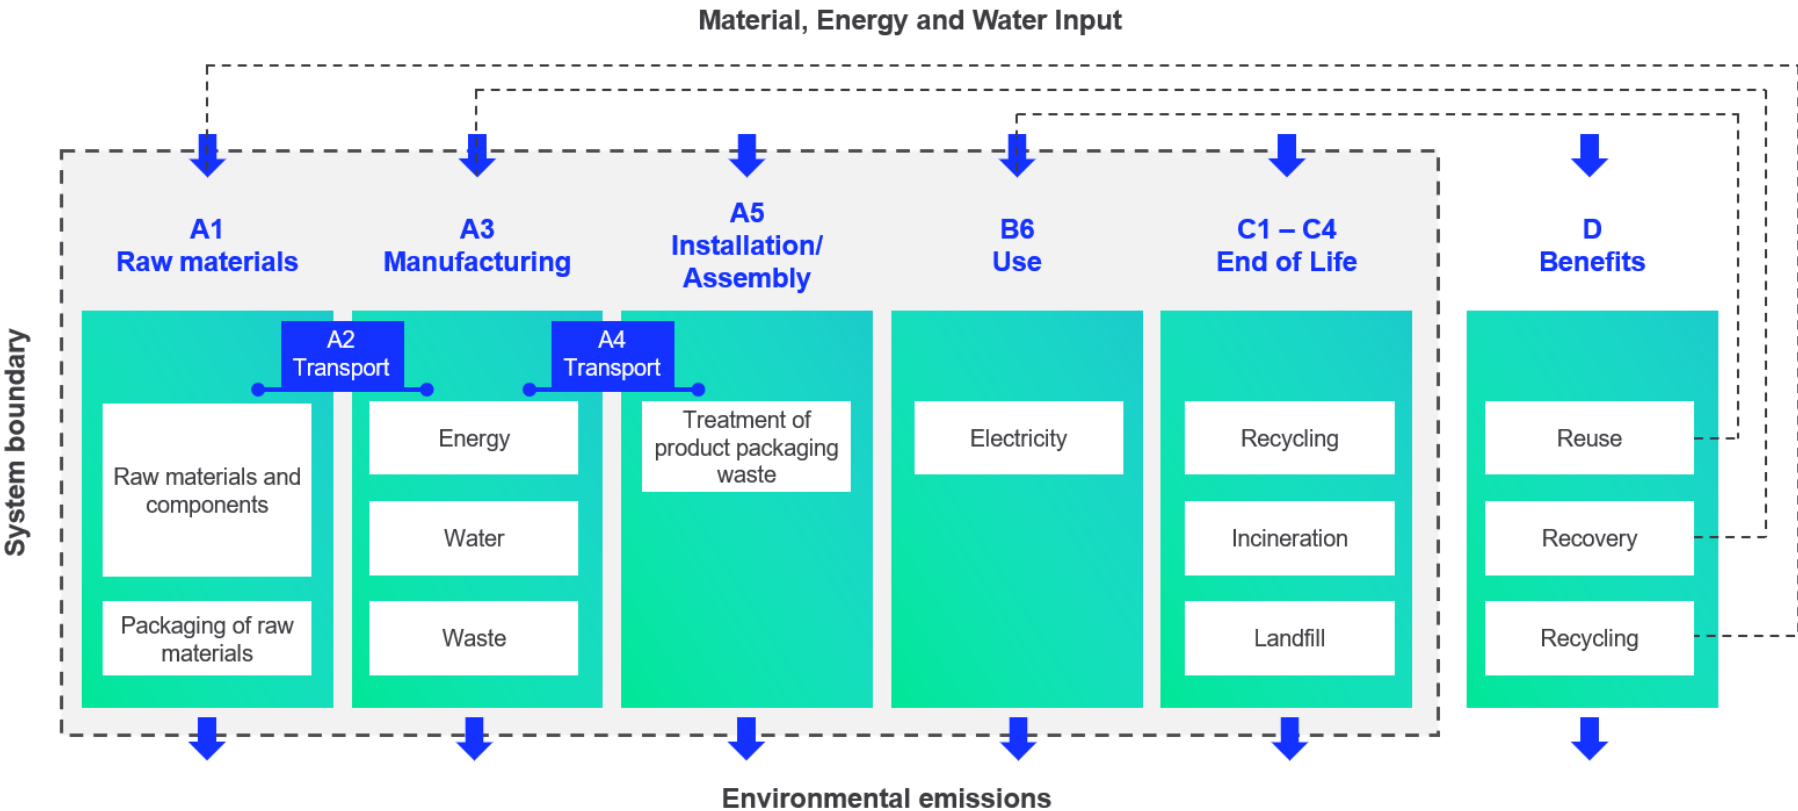

LIFE-CYCLE ASSESSMENT

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
No allocation	No allocation
No allocation	Allocated by mass or volume
Allocated by mass or volume	Allocated by mass or volume

This EPD is created with a most conservative scenario in A1-A3 in terms of material composition.

AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	Not applicable
Variation in GWP-fossil for A1-A3	Not applicable

This EPD is product and factory specific and does not contain average calculations. It is created with a most conservative scenario in A1-A3 in terms of material composition.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. Ecolnvent 3.8 database was used as the source of environmental data.

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	4,44E+00	5,15E-02	6,06E-01	5,10E+00	5,11E-02	1,13E-01	MNR	MNR	MNR	MNR	MNR	9,90E+01	MNR	MNR	2,41E-03	3,26E-02	2,07E-02	-2,11E+00
GWP – fossil	kg CO ₂ e	4,46E+00	5,14E-02	7,12E-01	5,23E+00	5,11E-02	5,64E-03	MNR	MNR	MNR	MNR	MNR	9,88E+01	MNR	MNR	2,40E-03	3,26E-02	2,07E-02	-2,11E+00
GWP – biogenic	kg CO ₂ e	-2,41E-02	0,00E+00	-1,08E-01	-1,32E-01	1,97E-05	1,08E-01	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	0,00E+00	0,00E+00	-3,43E-04
GWP – LULUC	kg CO ₂ e	5,03E-03	3,46E-05	1,69E-03	6,75E-03	1,88E-05	1,08E-06	MNR	MNR	MNR	MNR	MNR	2,31E-01	MNR	MNR	8,87E-07	4,26E-06	2,32E-06	-2,20E-04
Ozone depletion pot.	kg CFC ₁₁ e	1,70E-07	1,05E-08	7,16E-08	2,52E-07	1,17E-08	2,87E-10	MNR	MNR	MNR	MNR	MNR	5,02E-06	MNR	MNR	5,53E-10	3,93E-10	2,42E-10	-5,78E-08
Acidification potential	mol H ⁺ e	3,69E-02	1,44E-03	2,96E-03	4,14E-02	2,16E-04	2,41E-05	MNR	MNR	MNR	MNR	MNR	5,64E-01	MNR	MNR	1,02E-05	4,18E-05	1,26E-05	-2,49E-02
EP-freshwater ²⁾	kg Pe	2,27E-04	2,21E-07	2,26E-05	2,49E-04	4,18E-07	3,09E-08	MNR	MNR	MNR	MNR	MNR	1,05E-02	MNR	MNR	1,97E-08	1,41E-07	4,09E-08	-1,41E-04
EP-marine	kg Ne	4,82E-03	3,56E-04	6,61E-04	5,83E-03	6,42E-05	1,05E-05	MNR	MNR	MNR	MNR	MNR	7,48E-02	MNR	MNR	3,03E-06	1,06E-05	4,89E-06	-2,44E-03
EP-terrestrial	mol Ne	5,29E-02	3,95E-03	5,90E-03	6,28E-02	7,09E-04	1,09E-04	MNR	MNR	MNR	MNR	MNR	8,52E-01	MNR	MNR	3,34E-05	1,18E-04	4,44E-05	-2,86E-02
POCP (“smog”) ³⁾	kg NMVOCe	1,57E-02	1,03E-03	2,22E-03	1,89E-02	2,27E-04	2,70E-05	MNR	MNR	MNR	MNR	MNR	2,33E-01	MNR	MNR	1,07E-05	3,14E-05	1,25E-05	-8,29E-03
ADP-minerals & metals ⁴⁾	kg Sbe	1,61E-04	7,90E-08	2,15E-05	1,83E-04	1,20E-07	9,24E-09	MNR	MNR	MNR	MNR	MNR	9,22E-04	MNR	MNR	5,64E-09	3,51E-07	5,17E-09	-1,27E-04
ADP-fossil resources	MJ	4,56E+01	6,66E-01	1,04E+01	5,67E+01	7,67E-01	2,36E-02	MNR	MNR	MNR	MNR	MNR	2,10E+03	MNR	MNR	3,61E-02	4,22E-02	2,42E-02	-2,07E+01
Water use ⁵⁾	m ³ e depr.	1,36E+00	2,16E-03	4,11E-01	1,77E+00	3,43E-03	5,28E-03	MNR	MNR	MNR	MNR	MNR	5,75E+01	MNR	MNR	1,62E-04	1,80E-03	1,81E-03	-1,57E-01

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO₄e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	3,16E-07	2,29E-09	3,24E-08	3,51E-07	5,88E-09	2,18E-10	MNR	MNR	MNR	MNR	MNR	1,85E-06	MNR	MNR	2,77E-10	5,10E-10	2,02E-10	-1,19E-07
Ionizing radiation ⁶⁾	kBq U235e	2,17E-01	3,08E-03	2,68E-02	2,46E-01	3,65E-03	8,06E-05	MNR	MNR	MNR	MNR	MNR	5,69E+01	MNR	MNR	1,72E-04	2,39E-04	1,21E-04	-1,24E-01
Ecotoxicity (freshwater)	CTUe	1,55E+02	4,55E-01	1,86E+01	1,75E+02	6,90E-01	1,38E-01	MNR	MNR	MNR	MNR	MNR	1,43E+03	MNR	MNR	3,25E-02	2,34E-01	1,41E+01	-6,53E+01
Human toxicity, cancer	CTUh	7,39E-09	2,86E-11	4,62E-10	7,88E-09	1,69E-11	8,14E-12	MNR	MNR	MNR	MNR	MNR	4,68E-08	MNR	MNR	7,98E-13	7,75E-12	5,85E-11	-6,75E-10
Human tox. non-cancer	CTUh	1,68E-07	3,30E-10	1,63E-08	1,84E-07	6,83E-10	3,32E-10	MNR	MNR	MNR	MNR	MNR	1,54E-06	MNR	MNR	3,22E-11	3,22E-10	3,57E-09	-1,11E-07
SQP ⁷⁾	-	1,50E+01	2,17E-01	8,13E+00	2,34E+01	8,83E-01	1,37E-02	MNR	MNR	MNR	MNR	MNR	3,80E+02	MNR	MNR	4,16E-02	7,46E-02	3,28E-02	-5,13E+00

6) EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ	3,72E+00	5,11E-03	8,82E+00	1,26E+01	8,64E-03	6,92E-04	MNR	MNR	MNR	MNR	MNR	4,28E+02	MNR	MNR	4,07E-04	5,87E-03	1,09E-03	-3,61E-01
Renew. PER as material	MJ	2,24E-01	0,00E+00	9,84E-01	1,21E+00	0,00E+00	-9,84E-01	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of renew. PER	MJ	3,95E+00	5,11E-03	9,81E+00	1,38E+01	8,64E-03	-9,83E-01	MNR	MNR	MNR	MNR	MNR	4,28E+02	MNR	MNR	4,07E-04	5,87E-03	1,09E-03	-3,61E-01
Non-re. PER as energy	MJ	4,49E+01	6,66E-01	1,03E+01	5,58E+01	7,67E-01	2,36E-02	MNR	MNR	MNR	MNR	MNR	2,10E+03	MNR	MNR	3,61E-02	4,22E-02	2,42E-02	-2,07E+01
Non-re. PER as material	MJ	7,62E-01	0,00E+00	6,75E-02	8,29E-01	0,00E+00	-6,75E-02	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	-3,38E-01	-3,38E-01	0,00E+00
Total use of non-re. PER	MJ	4,56E+01	6,66E-01	1,03E+01	5,66E+01	7,67E-01	-4,39E-02	MNR	MNR	MNR	MNR	MNR	2,10E+03	MNR	MNR	3,61E-02	-2,96E-01	-3,14E-01	-2,07E+01
Secondary materials	kg	2,92E-02	2,82E-04	5,38E-02	8,33E-02	2,13E-04	2,72E-05	MNR	MNR	MNR	MNR	MNR	2,16E-01	MNR	MNR	1,00E-05	4,41E-05	7,73E-05	8,92E-02
Renew. secondary fuels	MJ	1,79E-03	1,01E-06	3,67E-03	5,46E-03	2,15E-06	3,69E-07	MNR	MNR	MNR	MNR	MNR	1,76E-03	MNR	MNR	1,01E-07	2,18E-06	5,07E-07	-4,89E-05
Non-ren. secondary fuels	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of net fresh water	m³	3,12E-02	5,06E-05	9,83E-03	4,11E-02	9,93E-05	6,62E-05	MNR	MNR	MNR	MNR	MNR	1,81E+00	MNR	MNR	4,68E-06	6,15E-05	2,88E-05	-7,59E-03

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	8,33E-01	9,04E-04	3,66E-02	8,70E-01	1,02E-03	9,95E-04	MNR	MNR	MNR	MNR	MNR	7,55E+00	MNR	MNR	4,79E-05	2,82E-04	2,19E-03	-3,41E-01
Non-hazardous waste	kg	9,65E+00	8,71E-03	7,37E-01	1,04E+01	1,67E-02	5,15E-02	MNR	MNR	MNR	MNR	MNR	4,78E+02	MNR	MNR	7,87E-04	1,96E-02	6,30E-02	-7,28E+00
Radioactive waste	kg	9,56E-05	4,67E-06	1,17E-05	1,12E-04	5,13E-06	5,29E-08	MNR	MNR	MNR	MNR	MNR	1,53E-02	MNR	MNR	2,42E-07	1,62E-07	0,00E+00	-4,58E-05

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	1,18E-01	0,00E+00	0,00E+00
Materials for energy rec	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy	MJ	0,00E+00	0,00E+00	3,41E-02	3,41E-02	0,00E+00	0,00E+00	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	2,72E-01	0,00E+00	0,00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	4,35E+00	5,11E-02	7,06E-01	5,11E+00	5,05E-02	5,49E-03	MNR	MNR	MNR	MNR	MNR	9,78E+01	MNR	MNR	2,38E-03	3,25E-02	2,05E-02	-2,07E+00
Ozone depletion Pot.	kg CFC ₁₁ e	1,46E-07	8,29E-09	6,17E-08	2,16E-07	9,30E-09	2,48E-10	MNR	MNR	MNR	MNR	MNR	4,35E-06	MNR	MNR	4,38E-10	3,23E-10	1,97E-10	-4,91E-08
Acidification	kg SO ₂ e	3,15E-02	1,15E-03	2,43E-03	3,51E-02	1,68E-04	1,75E-05	MNR	MNR	MNR	MNR	MNR	4,79E-01	MNR	MNR	7,91E-06	3,31E-05	9,67E-06	-2,16E-02
Eutrophication	kg PO ₄ ³ e	9,05E-03	1,31E-04	9,75E-04	1,02E-02	3,82E-05	1,34E-05	MNR	MNR	MNR	MNR	MNR	3,68E-01	MNR	MNR	1,80E-06	1,23E-05	4,49E-05	-5,74E-03
POCP ("smog")	kg C ₂ H ₄ e	1,69E-03	2,99E-05	1,84E-04	1,91E-03	6,56E-06	5,13E-07	MNR	MNR	MNR	MNR	MNR	1,96E-02	MNR	MNR	3,09E-07	1,18E-06	6,51E-07	-1,03E-03
ADP-elements	kg Sbe	1,60E-04	7,73E-08	2,14E-05	1,82E-04	1,16E-07	7,31E-09	MNR	MNR	MNR	MNR	MNR	9,20E-04	MNR	MNR	5,46E-09	3,51E-07	4,64E-09	-1,27E-04
ADP-fossil	MJ	4,56E+01	6,66E-01	1,04E+01	5,66E+01	7,67E-01	2,36E-02	MNR	MNR	MNR	MNR	MNR	2,10E+03	MNR	MNR	3,61E-02	4,22E-02	2,42E-02	-2,07E+01



APPENDIX (EPD HUB ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product family

To calculate the Scaled Impact (*SI*), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Modular directly for more information.

$$TSF = PSF * CSF$$

Table A1: Light management function (EPD Hub aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$Scaled\ Impact = GWP_{case} * TSF$$

Table A2 Scaled GWP per scaling factor (EPD Hub aligned)

Configuration	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
915005518701 (13310109)-Smart Lotis Recessed Adjustable 82 1x LED 2700K Medium DE White Structure	525	5	105,0	1,000	1,000	0,750	0,750	0,550	99,0	74,3	74,3	54,5
915005518801 (13310132)-Smart Lotis Recessed Adjustable 82 1x LED 2700K Medium DE Black Structure	512	5	102,0	1,004	1,004	0,753	0,753	0,552	99,4	74,5	74,5	54,7
915005519901 (13310146)-Smart Lotis Recessed Adjustable 82 1x LED 2700K Medium DE Gold Matt	522	5	104,0	1,004	1,004	0,753	0,753	0,552	99,4	74,5	74,5	54,7
915005520001 (13310209)-Smart Lotis Recessed Adjustable 82 1x LED 2700K Flood DE White Structure	502	5	100,0	1,004	1,004	0,753	0,753	0,552	99,4	74,5	74,5	54,7
915005520101 (13310232)-Smart Lotis Recessed Adjustable 82 1x LED 2700K Flood DE Black Structure	500	5	100,0	1,000	1,000	0,750	0,750	0,550	99,0	74,3	74,3	54,5
915005520201 (13310246)-Smart Lotis Recessed Adjustable 82 1x LED 2700K Flood DE Gold Matt	523	5	105,0	0,996	0,996	0,747	0,747	0,548	98,6	74,0	74,0	54,2
915005518901 (13311109)-Smart Lotis Recessed Adjustable 82 1x LED 3000K Medium DE White Structure	552	5	110,0	1,004	1,004	0,753	0,753	0,552	99,4	74,5	74,5	54,6
915005519001 (13311132)-Smart Lotis Recessed Adjustable 82 1x LED 3000K Medium DE Black Structure	539	5	108,0	0,998	0,998	0,749	0,749	0,549	98,8	74,1	74,1	54,3
915005520301 (13311146)-Smart Lotis Recessed Adjustable 82 1x LED 3000K Medium DE Gold Matt	549	5	110,0	0,998	0,998	0,749	0,749	0,549	98,8	74,1	74,1	54,4
915005520401 (13311209)-Smart Lotis Recessed Adjustable 82 1x LED 3000K Flood DE White Structure	528	5	106,0	0,996	0,996	0,747	0,747	0,548	98,6	74,0	74,0	54,2
915005520501 (13311232)-Smart Lotis Recessed Adjustable 82 1x LED 3000K Flood DE Black Structure	525	5	105,0	1,000	1,000	0,750	0,750	0,550	99,0	74,3	74,3	54,5
915005520601 (13311246)-Smart Lotis Recessed Adjustable 82 1x LED 3000K Flood DE Gold Matt	550	5	110,0	1,000	1,000	0,750	0,750	0,550	99,0	74,3	74,3	54,5
915005520701 (13312109)-Smart Lotis Recessed Adjustable 82 1x LED 4000K Medium DE White Structure	589	6	95,0	1,240	1,240	0,930	0,930	0,682	122,8	92,1	92,1	67,5
915005520801 (13312132)-Smart Lotis Recessed Adjustable 82 1x LED 4000K Medium DE Black Structure	574	6	93,0	1,234	1,234	0,926	0,926	0,679	122,2	91,7	91,7	67,2

915005520901 (13312146)-Smart Lotis Recessed Adjustable 82 1x LED 4000K Medium DE Gold Matt	586	6	94,0	1,247	1,247	0,935	0,935	0,686	123,4	92,6	92,6	67,9
915005521001 (13312209)-Smart Lotis Recessed Adjustable 82 1x LED 4000K Flood DE White Structure	563	6	91,0	1,237	1,237	0,928	0,928	0,681	122,5	91,9	91,9	67,4
915005521101 (13312232)-Smart Lotis Recessed Adjustable 82 1x LED 4000K Flood DE Black Structure	560	6	90,0	1,244	1,244	0,933	0,933	0,684	123,2	92,4	92,4	67,8
915005521201 (13312246)-Smart Lotis Recessed Adjustable 82 1x LED 4000K Flood DE Gold Matt	587	6	95,0	1,236	1,236	0,927	0,927	0,680	122,3	91,8	91,8	67,3
915005524701 (13313109)-Smart Lotis Recessed Adjustable 82 1x LED 1800-3000K WD Medium DE White Structure	498	6	83,0	1,200	1,200	0,900	0,900	0,660	118,8	89,1	89,1	65,3
915005524801 (13313132)-Smart Lotis Recessed Adjustable 82 1x LED 1800-3000K WD Medium DE Black Structure	480	6	80,0	1,200	1,200	0,900	0,900	0,660	118,8	89,1	89,1	65,3
915005524901 (13313146)-Smart Lotis Recessed Adjustable 82 1x LED 1800-3000K WD Medium DE Gold Matt	491	6	81,0	1,212	1,212	0,909	0,909	0,667	120,0	90,0	90,0	66,0
915005525001 (13313209)-Smart Lotis Recessed Adjustable 82 1x LED 1800-3000K WD Flood DE White Structure	489	6	81,0	1,207	1,207	0,906	0,906	0,664	119,5	89,7	89,7	65,7
915005525101 (13313232)-Smart Lotis Recessed Adjustable 82 1x LED 1800-3000K WD Flood DE Black Structure	459	6	76,0	1,208	1,208	0,906	0,906	0,664	119,6	89,7	89,7	65,8
915005525201 (13313246)-Smart Lotis Recessed Adjustable 82 1x LED 1800-3000K WD Flood DE Gold Matt	474	6	79,0	1,200	1,200	0,900	0,900	0,660	118,8	89,1	89,1	65,3
915005519101 (13320109)-Smart Cake Recessed Adjustable 82 1x LED 2700K Medium DE White Structure	420	5	84,0	1,000	1,000	0,750	0,750	0,550	99,0	74,3	74,3	54,5
915005519201 (13320132)-Smart Cake Recessed Adjustable 82 1x LED 2700K Medium DE Black Structure	354	5	71,0	0,997	0,997	0,748	0,748	0,548	98,7	74,0	74,0	54,3
915005521301 (13320146)-Smart Cake Recessed Adjustable 82 1x LED 2700K Medium DE Gold Matt	396	5	79,0	1,003	1,003	0,752	0,752	0,551	99,3	74,4	74,4	54,6
915005521401 (13320209)-Smart Cake Recessed Adjustable 82 1x LED 2700K Flood DE White Structure	440	5	88,0	1,000	1,000	0,750	0,750	0,550	99,0	74,3	74,3	54,5
915005521501 (13320232)-Smart Cake Recessed Adjustable 82 1x LED 2700K Flood DE Black Structure	361	5	72,0	1,003	1,003	0,752	0,752	0,552	99,3	74,5	74,5	54,6

915005521601 (13320246)-Smart Cake Recessed Adjustable 82 1x LED 2700K Flood DE Gold Matt	408	5	82,0	0,995	0,995	0,746	0,746	0,547	98,5	73,9	73,9	54,2
915005519301 (13321109)-Smart Cake Recessed Adjustable 82 1x LED 3000K Medium DE White Structure	442	5	88,0	1,005	1,005	0,753	0,753	0,553	99,5	74,6	74,6	54,7
915005519401 (13321132)-Smart Cake Recessed Adjustable 82 1x LED 3000K Medium DE Black Structure	372	5	74,0	1,005	1,005	0,754	0,754	0,553	99,5	74,7	74,7	54,7
915005521701 (13321146)-Smart Cake Recessed Adjustable 82 1x LED 3000K Medium DE Gold Matt	416	5	83,0	1,002	1,002	0,752	0,752	0,551	99,2	74,4	74,4	54,6
915005521801 (13321209)-Smart Cake Recessed Adjustable 82 1x LED 3000K Flood DE White Structure	463	5	93,0	0,996	0,996	0,747	0,747	0,548	98,6	73,9	73,9	54,2
915005521901 (13321232)-Smart Cake Recessed Adjustable 82 1x LED 3000K Flood DE Black Structure	380	5	76,0	1,000	1,000	0,750	0,750	0,550	99,0	74,3	74,3	54,5
915005522001 (13321246)-Smart Cake Recessed Adjustable 82 1x LED 3000K Flood DE Gold Matt	429	5	86,0	0,998	0,998	0,748	0,748	0,549	98,8	74,1	74,1	54,3
915005522101 (13322109)-Smart Cake Recessed Adjustable 82 1x LED 4000K Medium DE White Structure	471	6	76,0	1,239	1,239	0,930	0,930	0,682	122,7	92,0	92,0	67,5
915005522201 (13322132)-Smart Cake Recessed Adjustable 82 1x LED 4000K Medium DE Black Structure	397	6	64,0	1,241	1,241	0,930	0,930	0,682	122,8	92,1	92,1	67,6
915005522301 (13322146)-Smart Cake Recessed Adjustable 82 1x LED 4000K Medium DE Gold Matt	444	6	72,0	1,233	1,233	0,925	0,925	0,678	122,1	91,6	91,6	67,2
915005522401 (13322209)-Smart Cake Recessed Adjustable 82 1x LED 4000K Flood DE White Structure	493	6	80,0	1,233	1,233	0,924	0,924	0,678	122,0	91,5	91,5	67,1
915005522501 (13322232)-Smart Cake Recessed Adjustable 82 1x LED 4000K Flood DE Black Structure	405	6	65,0	1,246	1,246	0,935	0,935	0,685	123,4	92,5	92,5	67,9
915005522601 (13322246)-Smart Cake Recessed Adjustable 82 1x LED 4000K Flood DE Gold Matt	458	6	74,0	1,238	1,238	0,928	0,928	0,681	122,5	91,9	91,9	67,4
915005525301 (13323109)-Smart Cake Recessed Adjustable 82 1x LED 1800-3000K WD Medium DE White Structure	414	6	69,0	1,200	1,200	0,900	0,900	0,660	118,8	89,1	89,1	65,3
915005525401 (13323132)-Smart Cake Recessed Adjustable 82 1x LED 1800-3000K WD Medium DE Black Structure	350	6	58,0	1,207	1,207	0,905	0,905	0,664	119,5	89,6	89,6	65,7

915005525501 (13323146)-Smart Cake Recessed Adjustable 82 1x LED 1800-3000K WD Medium DE Gold Matt	388	6	64,0	1,213	1,213	0,909	0,909	0,667	120,0	90,0	90,0	66,0
915005525701 (13323232)-Smart Cake Recessed Adjustable 82 1x LED 1800-3000K WD Flood DE Black Structure	345	6	57,0	1,211	1,211	0,908	0,908	0,666	119,8	89,9	89,9	65,9
915005525601 (13323209)-Smart Cake Recessed Adjustable 82 1x LED 1800-3000K WD Flood DE White Structure	407	6	67,0	1,215	1,215	0,911	0,911	0,668	120,3	90,2	90,2	66,2
915005525801 (13323246)-Smart Cake Recessed Adjustable 82 1x LED 1800-3000K WD Flood DE Gold Matt	384	6	64,0	1,200	1,200	0,900	0,900	0,660	118,8	89,1	89,1	65,3
915005519501 (13330109)-Smart Kup Recessed Adjustable 82 1x LED 2700K Medium DE White Structure	525	5	105,0	1,000	1,000	0,750	0,750	0,550	99,0	74,3	74,3	54,5
915005519601 (13330132)-Smart Kup Recessed Adjustable 82 1x LED 2700K Medium DE Black Structure	512	5	102,0	1,004	1,004	0,753	0,753	0,552	99,4	74,5	74,5	54,7
915005522701 (13330146)-Smart Kup Recessed Adjustable 82 1x LED 2700K Medium DE Gold Matt	522	5	104,0	1,004	1,004	0,753	0,753	0,552	99,4	74,5	74,5	54,7
915005522801 (13330209)-Smart Kup Recessed Adjustable 82 1x LED 2700K Flood DE White Structure	502	5	100,0	1,004	1,004	0,753	0,753	0,552	99,4	74,5	74,5	54,7
915005522901 (13330232)-Smart Kup Recessed Adjustable 82 1x LED 2700K Flood DE Black Structure	500	5	100,0	1,000	1,000	0,750	0,750	0,550	99,0	74,3	74,3	54,5
915005523001 (13330246)-Smart Kup Recessed Adjustable 82 1x LED 2700K Flood DE Gold Matt	523	5	105,0	0,996	0,996	0,747	0,747	0,548	98,6	74,0	74,0	54,2
915005519701 (13331109)-Smart Kup Recessed Adjustable 82 1x LED 3000K Medium DE White Structure	552	5	110,0	1,004	1,004	0,753	0,753	0,552	99,4	74,5	74,5	54,6
915005519801 (13331132)-Smart Kup Recessed Adjustable 82 1x LED 3000K Medium DE Black Structure	539	5	108,0	0,998	0,998	0,749	0,749	0,549	98,8	74,1	74,1	54,3
915005523101 (13331146)-Smart Kup Recessed Adjustable 82 1x LED 3000K Medium DE Gold Matt	549	5	110,0	0,998	0,998	0,749	0,749	0,549	98,8	74,1	74,1	54,4
915005523201 (13331209)-Smart Kup Recessed Adjustable 82 1x LED 3000K Flood DE White Structure	528	5	106,0	0,996	0,996	0,747	0,747	0,548	98,6	74,0	74,0	54,2
915005523301 (13331232)-Smart Kup Recessed Adjustable 82 1x LED 3000K Flood DE Black Structure	525	5	105,0	1,000	1,000	0,750	0,750	0,550	99,0	74,3	74,3	54,5

915005523401 (13331246)-Smart Kup Recessed Adjustable 82 1x LED 3000K Flood DE Gold Matt	550	5	110,0	1,000	1,000	0,750	0,750	0,550	99,0	74,3	74,3	54,5
915005523501 (13332109)-Smart Kup Recessed Adjustable 82 1x LED 4000K Medium DE White Structure	589	6	95,0	1,240	1,240	0,930	0,930	0,682	122,8	92,1	92,1	67,5
915005523601 (13332132)-Smart Kup Recessed Adjustable 82 1x LED 4000K Medium DE Black Structure	574	6	93,0	1,234	1,234	0,926	0,926	0,679	122,2	91,7	91,7	67,2
915005523701 (13332146)-Smart Kup Recessed Adjustable 82 1x LED 4000K Medium DE Gold Matt	586	6	94,0	1,247	1,247	0,935	0,935	0,686	123,4	92,6	92,6	67,9
915005523801 (13332209)-Smart Kup Recessed Adjustable 82 1x LED 4000K Flood DE White Structure	563	6	91,0	1,237	1,237	0,928	0,928	0,681	122,5	91,9	91,9	67,4
915005523901 (13332232)-Smart Kup Recessed Adjustable 82 1x LED 4000K Flood DE Black Structure	560	6	90,0	1,244	1,244	0,933	0,933	0,684	123,2	92,4	92,4	67,8
915005524001 (13332246)-Smart Kup Recessed Adjustable 82 1x LED 4000K Flood DE Gold Matt	587	6	95,0	1,236	1,236	0,927	0,927	0,680	122,3	91,8	91,8	67,3
915005524101 (13333109)-Smart Kup Recessed Adjustable 82 1x LED 1800-3000K WD Medium DE White Structure	498	6	83,0	1,200	1,200	0,900	0,900	0,660	118,8	89,1	89,1	65,3
915005524201 (13333132)-Smart Kup Recessed Adjustable 82 1x LED 1800-3000K WD Medium DE Black Structure	480	6	80,0	1,200	1,200	0,900	0,900	0,660	118,8	89,1	89,1	65,3
915005524301 (13333146)-Smart Kup Recessed Adjustable 82 1x LED 1800-3000K WD Medium DE Gold Matt	491	6	81,0	1,212	1,212	0,909	0,909	0,667	120,0	90,0	90,0	66,0
915005524401 (13333209)-Smart Kup Recessed Adjustable 82 1x LED 1800-3000K WD Flood DE White Structure	489	6	81,0	1,207	1,207	0,906	0,906	0,664	119,5	89,7	89,7	65,7
915005524501 (13333232)-Smart Kup Recessed Adjustable 82 1x LED 1800-3000K WD Flood DE Black Structure	459	6	76,0	1,208	1,208	0,906	0,906	0,664	119,6	89,7	89,7	65,8
915005524601 (13333246)-Smart Kup Recessed Adjustable 82 1x LED 1800-3000K WD Flood DE Gold Matt	474	6	79,0	1,200	1,200	0,900	0,900	0,660	118,8	89,1	89,1	65,3

* Note that if the product is non-dimmable, only the values for "NC (No Control)" are valid; if the driver type is PSU, only the values for "NC (No Control)" and "PS (presence sensing)" are valid.

APPENDIX (PEP ECOPASSPORT ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management functions, the lumen output (O_{lum}) and reference service life (RSL) of each product within the same product family.

To calculate the Scaled Impact (SI_{pep}), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminary (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output (O_{lum}) and reference service lifetime (RSL) of the product to estimate the final environmental impact. The scaled impact (SI_{pep}) is presented in Table A4.

$$GSF = \frac{FU_{pep}}{FU_p} = \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$

3. Calculate the GWP scaling factor ($PGSF$), by multiplying the PSF by the GSF.

$$PGSF = PSF * GSF$$

4. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PGSF * CSF$$

Table A3: Light management functions (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

5. Lastly, the GWP of the base variant is then scaled by the TSF.

$$Scaled\ GWP = GWP_{case} * TSF$$

As described in the EPD, calculations are made based on dataset describing electricity available on the low voltage level in Europe for year 2022 (source Ecoinvent 3.8 database). This value should be adjusted depending on specific project requirements. Presented controls factors and functional unit conversion values are based on the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). Please refer to this publication or contact Modular directly for more information.

Table A4 Scale impact per scaling factor (PEP EcoPassport aligned)

Configuration	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
915005518701 (13310109)-Smart Lotis Recessed Adjustable 82 1x LED 2700K Medium DE White Structure	525	5	105,0	1,000	1,333	1,000	1,000	0,733	132,0	99,0	99,0	72,6
915005518801 (13310132)-Smart Lotis Recessed Adjustable 82 1x LED 2700K Medium DE Black Structure	512	5	102,0	1,004	1,373	1,029	1,029	0,755	135,9	101,9	101,9	74,7
915005519901 (13310146)-Smart Lotis Recessed Adjustable 82 1x LED 2700K Medium DE Gold Matt	522	5	104,0	1,004	1,346	1,010	1,010	0,740	133,3	100,0	100,0	73,3
915005520001 (13310209)-Smart Lotis Recessed Adjustable 82 1x LED 2700K Flood DE White Structure	502	5	100,0	1,004	1,400	1,050	1,050	0,770	138,6	104,0	104,0	76,2
915005520101 (13310232)-Smart Lotis Recessed Adjustable 82 1x LED 2700K Flood DE Black Structure	500	5	100,0	1,000	1,400	1,050	1,050	0,770	138,6	104,0	104,0	76,2

915005520201 (13310246)-Smart Lotis Recessed Adjustable 82 1x LED 2700K Flood DE Gold Matt	523	5	105,0	0,996	1,333	1,000	1,000	0,733	132,0	99,0	99,0	72,6
915005518901 (13311109)-Smart Lotis Recessed Adjustable 82 1x LED 3000K Medium DE White Structure	552	5	110,0	1,004	1,273	0,955	0,955	0,700	126,0	94,5	94,5	69,3
915005519001 (13311132)-Smart Lotis Recessed Adjustable 82 1x LED 3000K Medium DE Black Structure	539	5	108,0	1,0	1,3	1,0	1,0	0,7	128,3	96,3	96,3	70,6
915005520301 (13311146)-Smart Lotis Recessed Adjustable 82 1x LED 3000K Medium DE Gold Matt	549	5	110,0	1,0	1,3	1,0	1,0	0,7	126,0	94,5	94,5	69,3
915005520401 (13311209)-Smart Lotis Recessed Adjustable 82 1x LED 3000K Flood DE White Structure	528	5	106,0	1,0	1,3	1,0	1,0	0,7	130,8	98,1	98,1	71,9
915005520501 (13311232)-Smart Lotis Recessed Adjustable 82 1x LED 3000K Flood DE Black Structure	525	5	105,0	1,0	1,3	1,0	1,0	0,7	132,0	99,0	99,0	72,6
915005520601 (13311246)-Smart Lotis Recessed Adjustable 82 1x LED 3000K Flood DE Gold Matt	550	5	110,0	1,0	1,3	1,0	1,0	0,7	126,0	94,5	94,5	69,3
915005520701 (13312109)-Smart Lotis Recessed Adjustable 82 1x LED 4000K Medium DE White Structure	589	6	95,0	1,2	1,5	1,1	1,1	0,8	145,9	109,4	109,4	80,2
915005520801 (13312132)-Smart Lotis Recessed Adjustable 82 1x LED 4000K Medium DE Black Structure	574	6	93,0	1,2	1,5	1,1	1,1	0,8	149,0	111,8	111,8	82,0
915005520901 (13312146)-Smart Lotis Recessed Adjustable 82 1x LED 4000K Medium DE Gold Matt	586	6	94,0	1,2	1,5	1,1	1,1	0,8	147,4	110,6	110,6	81,1
915005521001 (13312209)-Smart Lotis Recessed Adjustable 82 1x LED 4000K Flood DE White Structure	563	6	91,0	1,2	1,5	1,2	1,2	0,8	152,3	114,2	114,2	83,8
915005521101 (13312232)-Smart Lotis Recessed Adjustable 82 1x LED 4000K Flood DE Black Structure	560	6	90,0	1,2	1,6	1,2	1,2	0,9	154,0	115,5	115,5	84,7
915005521201 (13312246)-Smart Lotis Recessed Adjustable 82 1x LED 4000K Flood DE Gold Matt	587	6	95,0	1,2	1,5	1,1	1,1	0,8	145,9	109,4	109,4	80,2
915005524701 (13313109)-Smart Lotis Recessed Adjustable 82 1x LED 1800-3000K WD Medium DE White Structure	498	6	83,0	1,2	1,7	1,3	1,3	0,9	167,0	125,2	125,2	91,8
915005524801 (13313132)-Smart Lotis Recessed Adjustable 82 1x LED 1800-3000K WD Medium DE Black Structure	480	6	80,0	1,2	1,8	1,3	1,3	1,0	173,3	129,9	129,9	95,3

915005524901 (13313146)-Smart Lotis Recessed Adjustable 82 1x LED 1800-3000K WD Medium DE Gold Matt	491	6	81,0	1,2	1,7	1,3	1,3	1,0	171,1	128,3	128,3	94,1
915005525001 (13313209)-Smart Lotis Recessed Adjustable 82 1x LED 1800-3000K WD Flood DE White Structure	489	6	81,0	1,2	1,7	1,3	1,3	1,0	171,1	128,3	128,3	94,1
915005525101 (13313232)-Smart Lotis Recessed Adjustable 82 1x LED 1800-3000K WD Flood DE Black Structure	459	6	76,0	1,2	1,8	1,4	1,4	1,0	182,4	136,8	136,8	100,3
915005525201 (13313246)-Smart Lotis Recessed Adjustable 82 1x LED 1800-3000K WD Flood DE Gold Matt	474	6	79,0	1,2	1,8	1,3	1,3	1,0	175,4	131,6	131,6	96,5
915005519101 (13320109)-Smart Cake Recessed Adjustable 82 1x LED 2700K Medium DE White Structure	420	5	84,0	1,0	1,7	1,3	1,3	0,9	165,0	123,8	123,8	90,8
915005519201 (13320132)-Smart Cake Recessed Adjustable 82 1x LED 2700K Medium DE Black Structure	354	5	71,0	1,0	2,0	1,5	1,5	1,1	195,2	146,4	146,4	107,4
915005521301 (13320146)-Smart Cake Recessed Adjustable 82 1x LED 2700K Medium DE Gold Matt	396	5	79,0	1,0	1,8	1,3	1,3	1,0	175,4	131,6	131,6	96,5
915005521401 (13320209)-Smart Cake Recessed Adjustable 82 1x LED 2700K Flood DE White Structure	440	5	88,0	1,0	1,6	1,2	1,2	0,9	157,5	118,1	118,1	86,6
915005521501 (13320232)-Smart Cake Recessed Adjustable 82 1x LED 2700K Flood DE Black Structure	361	5	72,0	1,0	1,9	1,5	1,5	1,1	192,5	144,4	144,4	105,9
915005521601 (13320246)-Smart Cake Recessed Adjustable 82 1x LED 2700K Flood DE Gold Matt	408	5	82,0	1,0	1,7	1,3	1,3	0,9	169,0	126,8	126,8	93,0
915005519301 (13321109)-Smart Cake Recessed Adjustable 82 1x LED 3000K Medium DE White Structure	442	5	88,0	1,0	1,6	1,2	1,2	0,9	157,5	118,1	118,1	86,6
915005519401 (13321132)-Smart Cake Recessed Adjustable 82 1x LED 3000K Medium DE Black Structure	372	5	74,0	1,0	1,9	1,4	1,4	1,0	187,3	140,5	140,5	103,0
915005521701 (13321146)-Smart Cake Recessed Adjustable 82 1x LED 3000K Medium DE Gold Matt	416	5	83,0	1,0	1,7	1,3	1,3	0,9	167,0	125,2	125,2	91,8
915005521801 (13321209)-Smart Cake Recessed Adjustable 82 1x LED 3000K Flood DE White Structure	463	5	93,0	1,0	1,5	1,1	1,1	0,8	149,0	111,8	111,8	82,0
915005521901 (13321232)-Smart Cake Recessed Adjustable 82 1x LED 3000K Flood DE Black Structure	380	5	76,0	1,0	1,8	1,4	1,4	1,0	182,4	136,8	136,8	100,3

915005522001 (13321246)-Smart Cake Recessed Adjustable 82 1x LED 3000K Flood DE Gold Matt	429	5	86,0	1,0	1,6	1,2	1,2	0,9	161,2	120,9	120,9	88,6
915005522101 (13322109)-Smart Cake Recessed Adjustable 82 1x LED 4000K Medium DE White Structure	471	6	76,0	1,2	1,8	1,4	1,4	1,0	182,4	136,8	136,8	100,3
915005522201 (13322132)-Smart Cake Recessed Adjustable 82 1x LED 4000K Medium DE Black Structure	397	6	64,0	1,2	2,2	1,6	1,6	1,2	216,6	162,4	162,4	119,1
915005522301 (13322146)-Smart Cake Recessed Adjustable 82 1x LED 4000K Medium DE Gold Matt	444	6	72,0	1,2	1,9	1,5	1,5	1,1	192,5	144,4	144,4	105,9
915005522401 (13322209)-Smart Cake Recessed Adjustable 82 1x LED 4000K Flood DE White Structure	493	6	80,0	1,2	1,8	1,3	1,3	1,0	173,3	129,9	129,9	95,3
915005522501 (13322232)-Smart Cake Recessed Adjustable 82 1x LED 4000K Flood DE Black Structure	405	6	65,0	1,2	2,2	1,6	1,6	1,2	213,2	159,9	159,9	117,3
915005522601 (13322246)-Smart Cake Recessed Adjustable 82 1x LED 4000K Flood DE Gold Matt	458	6	74,0	1,2	1,9	1,4	1,4	1,0	187,3	140,5	140,5	103,0
915005525301 (13323109)-Smart Cake Recessed Adjustable 82 1x LED 1800-3000K WD Medium DE White Structure	414	6	69,0	1,2	2,0	1,5	1,5	1,1	200,9	150,7	150,7	110,5
915005525401 (13323132)-Smart Cake Recessed Adjustable 82 1x LED 1800-3000K WD Medium DE Black Structure	350	6	58,0	1,2	2,4	1,8	1,8	1,3	239,0	179,2	179,2	131,4
915005525501 (13323146)-Smart Cake Recessed Adjustable 82 1x LED 1800-3000K WD Medium DE Gold Matt	388	6	64,0	1,2	2,2	1,6	1,6	1,2	216,6	162,4	162,4	119,1
915005525701 (13323232)-Smart Cake Recessed Adjustable 82 1x LED 1800-3000K WD Flood DE Black Structure	345	6	57,0	1,2	2,5	1,8	1,8	1,4	243,2	182,4	182,4	133,7
915005525601 (13323209)-Smart Cake Recessed Adjustable 82 1x LED 1800-3000K WD Flood DE White Structure	407	6	67,0	1,2	2,1	1,6	1,6	1,1	206,9	155,1	155,1	113,8
915005525801 (13323246)-Smart Cake Recessed Adjustable 82 1x LED 1800-3000K WD Flood DE Gold Matt	384	6	64,0	1,2	2,2	1,6	1,6	1,2	216,6	162,4	162,4	119,1
915005519501 (13330109)-Smart Kup Recessed Adjustable 82 1x LED 2700K Medium DE White Structure	525	5	105,0	1,0	1,3	1,0	1,0	0,7	132,0	99,0	99,0	72,6
915005519601 (13330132)-Smart Kup Recessed Adjustable 82 1x LED 2700K Medium DE Black Structure	512	5	102,0	1,0	1,4	1,0	1,0	0,8	135,9	101,9	101,9	74,7

915005522701 (13330146)-Smart Kup Recessed Adjustable 82 1x LED 2700K Medium DE Gold Matt	522	5	104,0	1,0	1,3	1,0	1,0	0,7	133,3	100,0	100,0	73,3
915005522801 (13330209)-Smart Kup Recessed Adjustable 82 1x LED 2700K Flood DE White Structure	502	5	100,0	1,0	1,4	1,1	1,1	0,8	138,6	104,0	104,0	76,2
915005522901 (13330232)-Smart Kup Recessed Adjustable 82 1x LED 2700K Flood DE Black Structure	500	5	100,0	1,0	1,4	1,1	1,1	0,8	138,6	104,0	104,0	76,2
915005523001 (13330246)-Smart Kup Recessed Adjustable 82 1x LED 2700K Flood DE Gold Matt	523	5	105,0	1,0	1,3	1,0	1,0	0,7	132,0	99,0	99,0	72,6
915005519701 (13331109)-Smart Kup Recessed Adjustable 82 1x LED 3000K Medium DE White Structure	552	5	110,0	1,0	1,3	1,0	1,0	0,7	126,0	94,5	94,5	69,3
915005519801 (13331132)-Smart Kup Recessed Adjustable 82 1x LED 3000K Medium DE Black Structure	539	5	108,0	1,0	1,3	1,0	1,0	0,7	128,3	96,3	96,3	70,6
915005523101 (13331146)-Smart Kup Recessed Adjustable 82 1x LED 3000K Medium DE Gold Matt	549	5	110,0	1,0	1,3	1,0	1,0	0,7	126,0	94,5	94,5	69,3
915005523201 (13331209)-Smart Kup Recessed Adjustable 82 1x LED 3000K Flood DE White Structure	528	5	106,0	1,0	1,3	1,0	1,0	0,7	130,8	98,1	98,1	71,9
915005523301 (13331232)-Smart Kup Recessed Adjustable 82 1x LED 3000K Flood DE Black Structure	525	5	105,0	1,0	1,3	1,0	1,0	0,7	132,0	99,0	99,0	72,6
915005523401 (13331246)-Smart Kup Recessed Adjustable 82 1x LED 3000K Flood DE Gold Matt	550	5	110,0	1,0	1,3	1,0	1,0	0,7	126,0	94,5	94,5	69,3
915005523501 (13332109)-Smart Kup Recessed Adjustable 82 1x LED 4000K Medium DE White Structure	589	6	95,0	1,2	1,5	1,1	1,1	0,8	145,9	109,4	109,4	80,2
915005523601 (13332132)-Smart Kup Recessed Adjustable 82 1x LED 4000K Medium DE Black Structure	574	6	93,0	1,2	1,5	1,1	1,1	0,8	149,0	111,8	111,8	82,0
915005523701 (13332146)-Smart Kup Recessed Adjustable 82 1x LED 4000K Medium DE Gold Matt	586	6	94,0	1,2	1,5	1,1	1,1	0,8	147,4	110,6	110,6	81,1
915005523801 (13332209)-Smart Kup Recessed Adjustable 82 1x LED 4000K Flood DE White Structure	563	6	91,0	1,2	1,5	1,2	1,2	0,8	152,3	114,2	114,2	83,8
915005523901 (13332232)-Smart Kup Recessed Adjustable 82 1x LED 4000K Flood DE Black Structure	560	6	90,0	1,2	1,6	1,2	1,2	0,9	154,0	115,5	115,5	84,7

915005524001 (13332246)-Smart Kup Recessed Adjustable 82 1x LED 4000K Flood DE Gold Matt	587	6	95,0	1,2	1,5	1,1	1,1	0,8	145,9	109,4	109,4	80,2
915005524101 (13333109)-Smart Kup Recessed Adjustable 82 1x LED 1800-3000K WD Medium DE White Structure	498	6	83,0	1,2	1,7	1,3	1,3	0,9	167,0	125,2	125,2	91,8
915005524201 (13333132)-Smart Kup Recessed Adjustable 82 1x LED 1800-3000K WD Medium DE Black Structure	480	6	80,0	1,2	1,8	1,3	1,3	1,0	173,3	129,9	129,9	95,3
915005524301 (13333146)-Smart Kup Recessed Adjustable 82 1x LED 1800-3000K WD Medium DE Gold Matt	491	6	81,0	1,2	1,7	1,3	1,3	1,0	171,1	128,3	128,3	94,1
915005524401 (13333209)-Smart Kup Recessed Adjustable 82 1x LED 1800-3000K WD Flood DE White Structure	489	6	81,0	1,2	1,7	1,3	1,3	1,0	171,1	128,3	128,3	94,1
915005524501 (13333232)-Smart Kup Recessed Adjustable 82 1x LED 1800-3000K WD Flood DE Black Structure	459	6	76,0	1,2	1,8	1,4	1,4	1,0	182,4	136,8	136,8	100,3
915005524601 (13333246)-Smart Kup Recessed Adjustable 82 1x LED 1800-3000K WD Flood DE Gold Matt	474	6	79,0	1,2	1,8	1,3	1,3	1,0	175,4	131,6	131,6	96,5

* Note that if the product is non-dimmable, only the values for "NC (No Control)" are valid; if the driver type is PSU, only the values for "NC (No Control)" and "PS (presence sensing)" for are valid.

