
Shellby 184 LED DE


121800XX_121801XX










Drive Current (mA)	Forward Voltage		Power
	min (Vf)	max (Vf)	(W)
350	14,8	18,0	5,7
500	15,2	18,6	8,5
700	15,9	19,5	12,4
For serial connection, respect polarity!			
RED		→ BLACK	

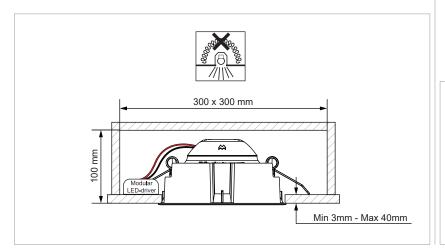

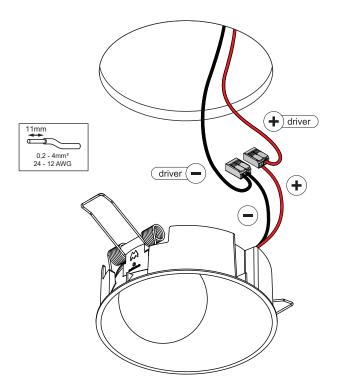









Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.

Reference number: 80000626





Touching the LED can result in permanent damage of the light source. The light source and/or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales













