


SLD75 recessed bracket trimless

93550997

Cut-out size



(Length + 5mm) x 81mm

LENGTH
PROFILE LENGTH + 5mm

WIDTH
MINIMUM 54mm
MAXIMUM 56mm

MINIMUM 7mm
MAXIMUM 21mm

PROFILE LENGTH

see profile drawing for distance


SCREWS NOT INCLUDED



Use FLEX filler



Dimensions.

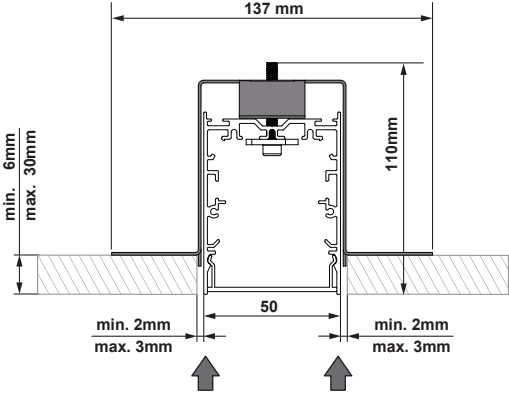

137 mm

110 mm

min. 6mm
max. 30mm

min. 2mm
max. 3mm

50

min. 2mm
max. 3mm

Use FLEX filler





Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.
On site conditions (e.g. heat, humidity, ...) can lead to expansion of the diffuser. Therefore onsite shortening of the diffuser can be required.




LIGHT SOURCE - DO NOT TOUCH LED
Touching the LED can result in permanent damage of the light source. The light source and/or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.




PREVENTING ELECTROSTATIC DAMAGE
A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.






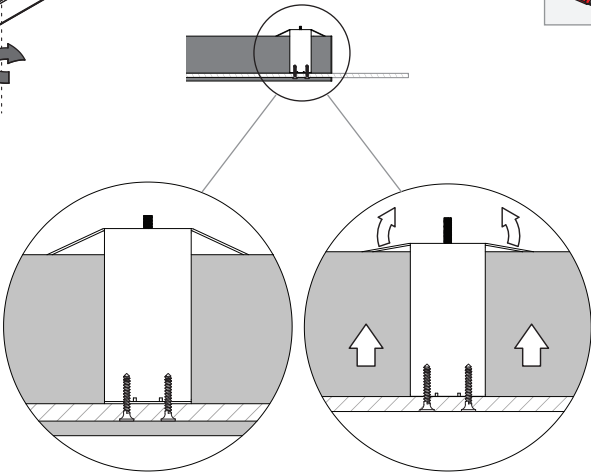

Use FLEX filler



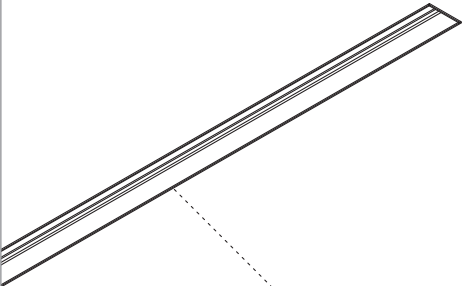

02 - 14/05/2024

