


Extruded Stripped Track 48V Suspended 1.8

Overview

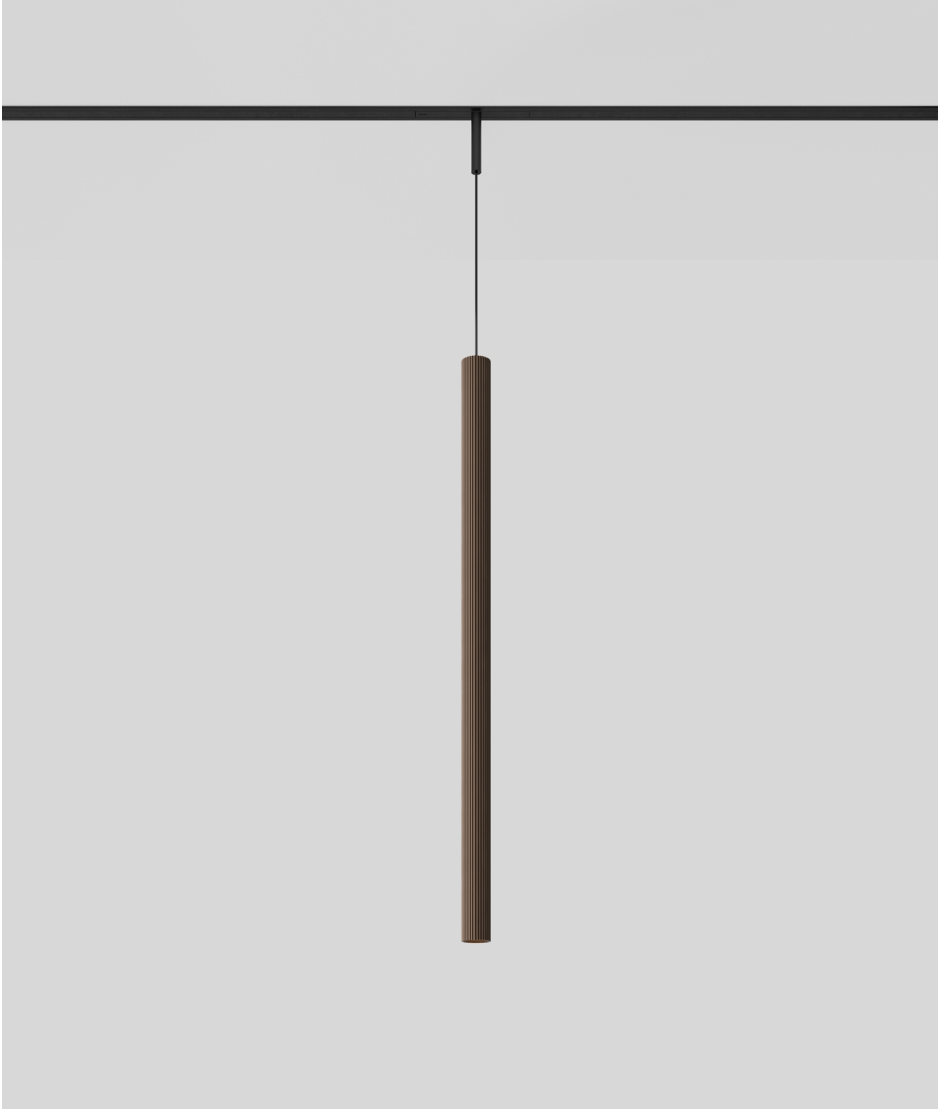


Strong lines that blend. Extruded Stripped is a contemporary design that harmonizes smoothly with its environment. This new family welcomes statement and stillness in a very minimalist look.


Extruded Stripped Track 48V Suspended 1.8

Luminaire Specifications


- For use with Pista 48V track systems
- Aperture: 0.9"
- Tube material: aluminum (available in different lengths)
- Tube finish: powder coat or anodisation
- Inner glare control ring: always matte black
- Cable diameter: 0.18"
- Cable color: black
- Cable length: 78.7" (can be field adjusted)
- Upon insertion, fixtures lock into the track
- Fixtures can be moved in the track by sliding
- Fixtures can be unlocked / removed from the track with a flathead screwdriver

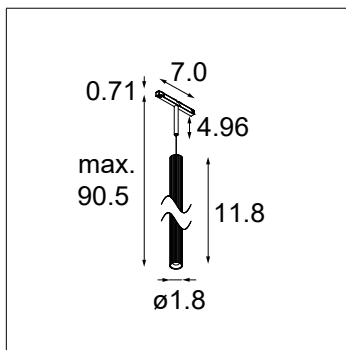

Extruded Stripped Track 48V 1.8
Tube length: 11.8"

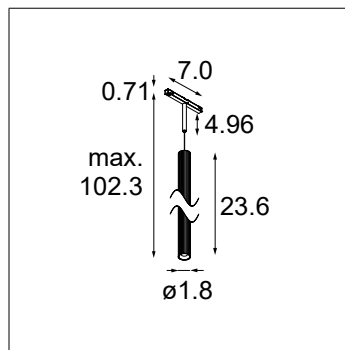

Extruded Stripped Track 48V 1.8
Tube length: 23.6"

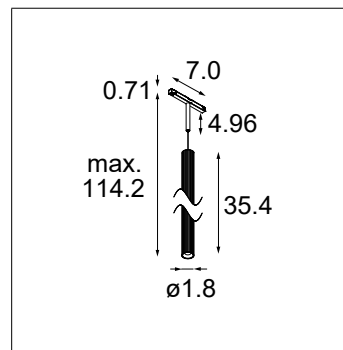

Extruded Stripped Track 48V 1.8
Tube length: 35.4"



Finish Information



Grey White Structure (GWS)
Powder Coat (Matte)



Black (BLA)
Anodised



Bronze (BRA)
Anodised



Champagne (CHA)
Anodised

Pista Track Compatibility

	Surface Track Suspended Track	Suspended Up / Down Track		Recessed Flanged Track	Recessed Trimless Track
		Up Portion	Down Portion		
Extruded Stripped Track 48V 1.8	M		M	M	M

See separate track datasheets for track information and accessories

Ordering Information

		F	DY		
EXTRS-T48-SP-1.8-11.8-1X	Extruded Stripped Track 48V 1.8 Tube length: 11.8"	27 2700K	F Flood	DY Dry Location	0101 0-10V
EXTRS-T48-SP-1.8-23.6-1X	Extruded Stripped Track 48V 1.8 Tube length: 23.6"	30 3000K			D DALI
EXTRS-T48-SP-1.8-35.4-1X	Extruded Stripped Track 48V 1.8 Tube length: 35.4"	35 3500K			
		WD Warm Dim 3000K - 1800K			
					GWS Grey White Structure
					BLA Black
					BRA Bronze
					CHA Champagne

Extruded Stripped Track 48V Suspended 1.8

Performance Specifications (per luminaire)

	Fixed CCT	Warm Dim
Weight (length: 11.8")	1.5lbs	1.5lbs
Weight (length: 23.6")	2.5lbs	2.5lbs
Weight (length: 35.4")	3.6lbs	3.6lbs
Location	dry	dry
CRI*	92, R9: 72	95, R9: 88
Lifetime	L80 B20 @ 50,000 hrs	L80 B20 @ 50,000 hrs
UGR	see website	see website
Beam angle	43°	48°



Electrical (typical)

Lamp Units	Dim Type	Input Voltage	Connected Load	Dim Level***
1x Fixed CCT	0-10V	48VDC	10.3W	1%
1x Fixed CCT	DALI**	48VDC	10.3W	1%
1x Warm Dim	0-10V	48VDC	6.9W	1%
1x Warm Dim	DALI**	48VDC	6.9W	1%

* CRI & TM-30 Value for 3000K

** Compatible with Casambi Wireless Pista Module. See track datasheets for more details

*** Consult the factory for dimmer compatibility

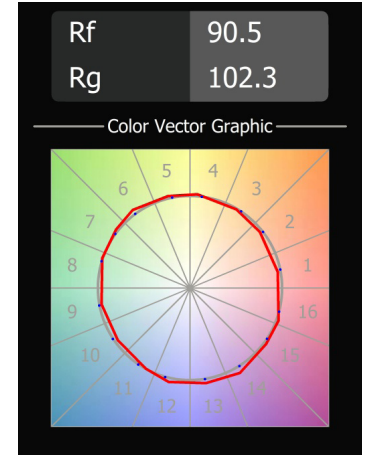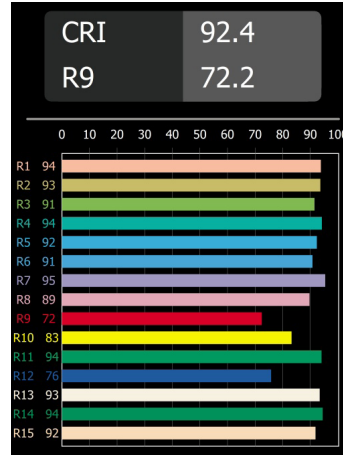

For photometric files see website or contact factory.

Output Specifications (per luminaire)

Reference Delivered Lumens	CCT	Optics	Finish
794 (ref. 3000K, F, GWS)	2700K (0.98) 3000K (1.00) 3500K (1.08)	F (1.00)	GWS (1.00) BLA (1.00) BRA (1.00) CHA (1.00)
379 (ref. 3000K-1800K, F, GWS)	3000K - 1800K (1.00)	F (1.00)	GWS (1.00) BLA (1.00) BRA (1.00) CHA (1.00)

Multipliers are indicated between brackets: ()

Example calculation, to determine typical output for 2700K, flood, bronze: 794 x (0.98) x (1.00) x (1.00) = 778 lumens

Listings and Certifications

- Classified: cULus
- Dry locations



Warranty

- Visit <https://www.supermodular.com/en-us/warranty>