




ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

Smart Recessed 48 IP55

Modular Lighting Instruments



EPD HUB

Publishing date 2024-10-03



GENERAL INFORMATION

MANUFACTURER

Manufacturer	Modular Lighting Instruments
Address	Armoedestraat 71 - 8800 Roeselare - BELGIUM
Contact details	sustainability@supermodular.com
Website	www.supermodular.com

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022
Sector	Electrical product
Category of EPD	Pre-verified EPD
Scope of the EPD	Cradle to gate with options, A4-B7, and modules C1-C4, D
EPD author	Sustainability Signify
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input checked="" type="checkbox"/> Internal certification <input type="checkbox"/> External verification

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of lighting products may not be comparable if they do not comply with EN 15804 and if they are not compared in a lighting context.

PRODUCT

Product name	Smart Recessed 48 IP55
Additional labels	Not applicable
Product reference	915005086801 (12861009)
Place of production	BELGIUM
Period for data	2024
Averaging in EPD	No averaging
Variation in GWP-fossil for A1-A3	Not applicable

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 Unit
Declared unit mass	0.091 kg
GWP-fossil, A1-A3 (kgCO2e)	2.40E+00
GWP-total, A1-A3 (kgCO2e)	2.33E+00
Secondary material, inputs (%)	11.3
Secondary material, outputs (%)	66.5
Total energy use, A1-A3 (kWh)	9.08
Net fresh water use, A1-A3 (m3e)	0.02

PRODUCT AND MANUFACTURER

ABOUT THE MANUFACTURER

Belgian architectural lighting since 1980. Creating beautifully crafted products that break the boundaries of technical limitations. Our ambition since the start. Over the years, we have built the reputation of being innovators and pioneers in the architectural lighting world. Today, staying true to our core values, we continue offering a full portfolio to challenge your thinking.

For more information, please visit: www.supermodular.com.

PRODUCT DESCRIPTION

Like the flower that opens up and welcomes you in, Smart Recessed brings charm to your space with a simple and elegant design. Smart Recessed is a popular spot for a minimalistic expression.

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	84.08	APAC , NAM , EU
Minerals	3.82	EU , APAC
Fossil materials	12.1	APAC , NAM , EU
Bio-based materials	0	Not applicable

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C 0

Biogenic carbon content in packaging, kg C 0.014

FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 Unit
Mass per declared unit	0.091 kg
Functional unit	85 Lumens over 50000 hours
Reference service life	50000 hours

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0.1 % (1000 ppm).

PRODUCT LIFE-CYCLE

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage		Assembly stage		Use stage							End of life stage				Beyond the system boundaries				
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D			
x	x	x	x	x	MNR	MNR	MNR	MNR	MNR	x	MNR	MNR	x	x	x	x	x		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Operational	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not relevant = MNR.

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, electricity, and waste formed in the production processes at Modular's manufacturing facilities are included in this stage. The product is made of metals, plastics, and electronic components. All components are transported to Modular's production facility, where the main manufacturing processes primarily are associated with assembly. The finished product is packaged with polyethylene, cardboard, and/or paper as packaging material before being sent to customers. Manufacturing loss, ancillaries and wastes are calculated according to the data that each manufacturing site is sharing with Modular. The total annual amount of waste in kg is allocated to the total annual production in kg at the specific manufacturing site responsible for the production of the studied luminaire. Thus, it is possible to allocate it according to the weight of the product analysed in this study. Some of the waste are due to ancillary materials used during manufacturing while the rest is due to material losses.

TRANSPORT AND INSTALLATION (A4-A5)

Transport distances were calculated on the base of the supplier location and manufacturing location and then made a cumulative group choosing the conservative scenario. Environmental impacts from installation include waste packaging materials (A5). The impacts of energy consumption and the used ancillary materials during installation are considered negligible.


PRODUCT USE AND MAINTENANCE (B1-B7)

During the use phase, the product consumes electricity from EU's electricity grid mix (B6). The total power consumption of the reference product is calculated as follows: Wattage x Reference lifetime = kWh consumed throughout the entire use phase B6.

PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. Transportation distance to treatment is assumed as 150 km and the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and loads of incineration and recycling are included in Module D.

SYSTEM BOUNDARY

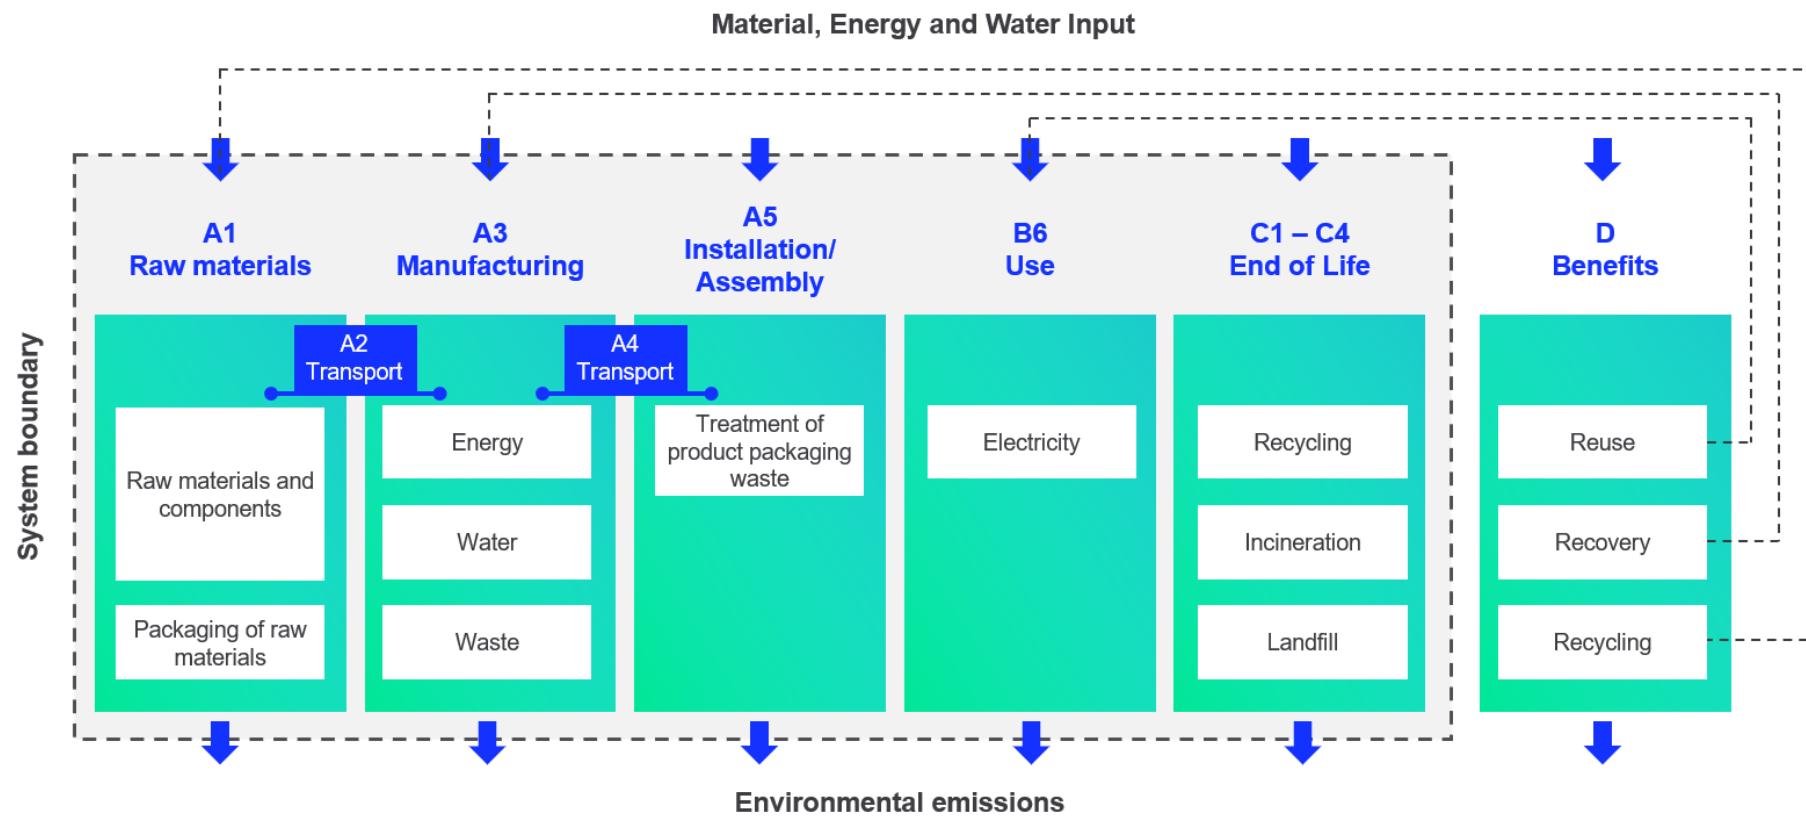

LIFE-CYCLE ASSESSMENT

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass or volume
Manufacturing energy and waste	Allocated by mass or volume

This EPD is created with a most conservative scenario in A1-A3 in terms of material composition.

AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	Not applicable
Variation in GWP-fossil for A1-A3	Not applicable

This EPD is product and factory specific and does not contain average calculations. It is created with a most conservative scenario in A1-A3 in terms of material composition.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. Ecoinvent 3.8 database was used as the source of environmental data.

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	2.08E+00	2.42E-02	2.32E-01	2.33E+00	2.39E-02	5.22E-02	MNR	MNR	MNR	MNR	MNR	1.98E+01	MNR	MNR	1.28E-03	1.32E-02	2.58E-02	-9.81E-01
GWP – fossil	kg CO ₂ e	2.09E+00	2.42E-02	2.82E-01	2.40E+00	2.38E-02	1.63E-03	MNR	MNR	MNR	MNR	MNR	1.98E+01	MNR	MNR	1.28E-03	1.32E-02	9.46E-03	-9.81E-01
GWP – biogenic	kg CO ₂ e	-1.63E-02	0.00E+00	-5.06E-02	-6.70E-02	9.22E-06	5.06E-02	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	0.00E+00	1.63E-02	-1.30E-04
GWP – LULUC	kg CO ₂ e	2.79E-03	1.44E-05	9.18E-04	3.72E-03	8.79E-06	5.37E-07	MNR	MNR	MNR	MNR	MNR	4.62E-02	MNR	MNR	4.73E-07	2.07E-06	1.11E-06	-8.57E-05
Ozone depletion pot.	kg CFC-11e	7.94E-08	5.07E-09	3.17E-08	1.16E-07	5.48E-09	1.34E-10	MNR	MNR	MNR	MNR	MNR	1.00E-06	MNR	MNR	2.95E-10	1.78E-10	1.13E-10	-2.67E-08
Acidification potential	mol H ⁺ e	1.53E-02	5.34E-04	9.72E-04	1.68E-02	1.01E-04	1.16E-05	MNR	MNR	MNR	MNR	MNR	1.13E-01	MNR	MNR	5.43E-06	1.90E-05	5.82E-06	-1.06E-02
EP-freshwater ²⁾	kg Pe	9.15E-05	1.27E-07	6.97E-06	9.86E-05	1.95E-07	1.47E-08	MNR	MNR	MNR	MNR	MNR	2.09E-03	MNR	MNR	1.05E-08	6.75E-08	1.97E-08	-6.33E-05
EP-marine	kg Ne	2.19E-03	1.33E-04	2.67E-04	2.59E-03	3.00E-05	5.14E-06	MNR	MNR	MNR	MNR	MNR	1.50E-02	MNR	MNR	1.61E-06	4.71E-06	2.18E-06	-1.11E-03
EP-terrestrial	mol Ne	2.42E-02	1.48E-03	2.28E-03	2.80E-02	3.31E-04	5.27E-05	MNR	MNR	MNR	MNR	MNR	1.70E-01	MNR	MNR	1.78E-05	5.26E-05	2.03E-05	-1.29E-02
POCP ("smog") ³⁾	kg NMVOCe	7.14E-03	3.91E-04	1.17E-03	8.70E-03	1.06E-04	1.31E-05	MNR	MNR	MNR	MNR	MNR	4.66E-02	MNR	MNR	5.70E-06	1.40E-05	5.73E-06	-3.73E-03
ADP-minerals & metals ⁴⁾	kg Sbe	6.00E-05	4.19E-08	1.80E-06	6.19E-05	5.59E-08	4.25E-09	MNR	MNR	MNR	MNR	MNR	1.84E-04	MNR	MNR	3.01E-09	1.60E-07	2.40E-09	-3.10E-05
ADP-fossil resources	MJ	2.08E+01	3.25E-01	4.56E+00	2.57E+01	3.58E-01	1.14E-02	MNR	MNR	MNR	MNR	MNR	4.21E+02	MNR	MNR	1.93E-02	1.98E-02	1.13E-02	-9.60E+00
Water use ⁵⁾	m ³ e depr.	4.98E-01	1.17E-03	1.05E-01	6.04E-01	1.60E-03	2.45E-03	MNR	MNR	MNR	MNR	MNR	1.15E+01	MNR	MNR	8.62E-05	7.67E-04	8.39E-04	-6.71E-02

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	1.57E-07	1.50E-09	1.39E-08	1.72E-07	2.75E-09	1.05E-10	MNR	MNR	MNR	MNR	MNR	3.71E-07	MNR	MNR	1.48E-10	2.34E-10	9.60E-11	-5.41E-08
Ionizing radiation ⁶⁾	kBq U235e	7.77E-02	1.52E-03	9.89E-03	8.91E-02	1.70E-03	3.78E-05	MNR	MNR	MNR	MNR	MNR	1.14E+01	MNR	MNR	9.18E-05	1.18E-04	5.71E-05	-5.76E-02
Ecotoxicity (freshwater)	CTUe	7.13E+01	2.41E-01	5.47E+00	7.70E+01	3.22E-01	6.00E-02	MNR	MNR	MNR	MNR	MNR	2.86E+02	MNR	MNR	1.73E-02	1.07E-01	6.70E+00	-2.37E+01
Human toxicity, cancer	CTUh	3.04E-09	1.21E-11	2.18E-10	3.27E-09	7.91E-12	4.15E-12	MNR	MNR	MNR	MNR	MNR	9.37E-09	MNR	MNR	4.26E-13	3.43E-12	1.60E-11	-8.19E-11
Human tox. non-cancer	CTUh	6.13E-08	1.96E-10	3.13E-09	6.46E-08	3.19E-10	1.65E-10	MNR	MNR	MNR	MNR	MNR	3.08E-07	MNR	MNR	1.72E-11	1.43E-10	8.14E-10	-3.30E-08
SQP ⁷⁾	-	7.44E+00	1.80E-01	5.13E+00	1.27E+01	4.12E-01	6.93E-03	MNR	MNR	MNR	MNR	MNR	7.60E+01	MNR	MNR	2.22E-02	3.42E-02	1.53E-02	-2.05E+00

6) EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ	1.72E+00	2.82E-03	5.92E+00	7.65E+00	4.03E-03	3.11E-04	MNR	MNR	MNR	MNR	MNR	8.56E+01	MNR	MNR	2.17E-04	2.76E-03	5.12E-04	-1.45E-01
Renew. PER as material	MJ	1.59E-01	0.00E+00	4.75E-01	6.35E-01	0.00E+00	-4.75E-01	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	-2.59E-03	-1.57E-01	0.00E+00
Total use of renew. PER	MJ	1.88E+00	2.82E-03	6.40E+00	8.28E+00	4.03E-03	-4.75E-01	MNR	MNR	MNR	MNR	MNR	8.56E+01	MNR	MNR	2.17E-04	1.75E-04	-1.56E-01	-1.45E-01
Non-re. PER as energy	MJ	2.06E+01	3.25E-01	4.15E+00	2.50E+01	3.58E-01	1.14E-02	MNR	MNR	MNR	MNR	MNR	4.20E+02	MNR	MNR	1.93E-02	1.98E-02	1.13E-02	-9.60E+00
Non-re. PER as material	MJ	3.18E-01	0.00E+00	1.12E-02	3.29E-01	0.00E+00	-1.12E-02	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	-1.57E-01	-1.61E-01	0.00E+00
Total use of non-re. PER	MJ	2.09E+01	3.25E-01	4.16E+00	2.54E+01	3.58E-01	1.35E-04	MNR	MNR	MNR	MNR	MNR	4.20E+02	MNR	MNR	1.93E-02	-1.37E-01	-1.50E-01	-9.60E+00
Secondary materials	kg	1.03E-02	1.25E-04	1.83E-02	2.87E-02	9.94E-05	1.28E-05	MNR	MNR	MNR	MNR	MNR	4.33E-02	MNR	MNR	5.35E-06	1.99E-05	3.57E-05	4.18E-02
Renew. secondary fuels	MJ	8.85E-04	6.08E-07	1.15E-03	2.04E-03	1.00E-06	1.52E-07	MNR	MNR	MNR	MNR	MNR	3.51E-04	MNR	MNR	5.40E-08	1.02E-06	2.36E-07	-2.68E-05
Non-ren. secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m ³	1.15E-02	2.95E-05	5.42E-03	1.69E-02	4.64E-05	2.34E-05	MNR	MNR	MNR	MNR	MNR	3.62E-01	MNR	MNR	2.50E-06	2.60E-05	1.20E-05	-3.24E-03

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	3.90E-01	4.39E-04	1.32E-02	4.03E-01	4.75E-04	7.60E-04	MNR	MNR	MNR	MNR	MNR	1.51E+00	MNR	MNR	2.55E-05	1.34E-04	5.28E-04	-1.56E-01
Non-hazardous waste	kg	3.67E+00	5.03E-03	2.13E-01	3.89E+00	7.80E-03	1.67E-02	MNR	MNR	MNR	MNR	MNR	9.55E+01	MNR	MNR	4.20E-04	8.59E-03	3.01E-02	-3.06E+00
Radioactive waste	kg	3.75E-05	2.25E-06	7.01E-06	4.67E-05	2.40E-06	3.03E-08	MNR	MNR	MNR	MNR	MNR	3.06E-03	MNR	MNR	1.29E-07	7.66E-08	0.00E+00	-2.12E-05

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	5.56E-02	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	4.92E-03	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	1.59E-02	1.59E-02	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	1.08E-01	0.00E+00	0.00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	2.03E+00	2.40E-02	2.81E-01	2.34E+00	2.36E-02	1.55E-03	MNR	MNR	MNR	MNR	MNR	1.96E+01	MNR	MNR	1.27E-03	1.31E-02	9.38E-03	-9.62E-01
Ozone depletion Pot.	kg CFC-11e	6.74E-08	4.02E-09	2.68E-08	9.82E-08	4.34E-09	1.15E-10	MNR	MNR	MNR	MNR	MNR	8.70E-07	MNR	MNR	2.34E-10	1.46E-10	9.17E-11	-2.26E-08
Acidification	kg SO ₂ e	1.30E-02	4.26E-04	7.83E-04	1.42E-02	7.84E-05	8.38E-06	MNR	MNR	MNR	MNR	MNR	9.57E-02	MNR	MNR	4.22E-06	1.51E-05	4.46E-06	-9.17E-03
Eutrophication	kg PO ₄ ³⁻ e	3.72E-03	5.09E-05	3.18E-04	4.08E-03	1.79E-05	6.50E-06	MNR	MNR	MNR	MNR	MNR	7.37E-02	MNR	MNR	9.61E-07	5.56E-06	1.92E-05	-2.52E-03
POCP ("smog")	kg C ₂ H ₄ e	7.45E-04	1.13E-05	7.87E-05	8.35E-04	3.06E-06	2.39E-07	MNR	MNR	MNR	MNR	MNR	3.92E-03	MNR	MNR	1.65E-07	5.46E-07	3.00E-07	-4.46E-04
ADP-elements	kg Sbe	6.11E-05	4.09E-08	1.75E-06	6.29E-05	5.41E-08	3.38E-09	MNR	MNR	MNR	MNR	MNR	1.84E-04	MNR	MNR	2.91E-09	1.60E-07	2.16E-09	-3.09E-05
ADP-fossil	MJ	2.09E+01	3.25E-01	4.56E+00	2.57E+01	3.58E-01	1.14E-02	MNR	MNR	MNR	MNR	MNR	4.20E+02	MNR	MNR	1.93E-02	1.98E-02	1.13E-02	-9.60E+00

APPENDIX (EPD HUB ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaires (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product family.

To calculate the Scaled Impact (SI), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in question P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according to the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Signify directly for more information.

$$TSF = PSF * CSF$$

Table A1: Light management function (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$\text{Scaled Impact} = \text{GWP}_{\text{case}} * \text{TSF}$$

Table A2 Scaled GWP per scaling factor (EPD Hub aligned)

Configuration	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
915005086801 - 12861009 Smart Lotis Recessed 48 1x IP55 LED 3000K Medium DE White Structure	85.0	1.0	85.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292690 - 12861014 Smart Lotis Recessed 48 1x IP55 LED 3000K Medium DE Bronze Brushed	82.0	1.0	82.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292691 - 12861015 Smart Lotis Recessed 48 1x IP55 LED 3000K Medium DE Champagne Brushed	83.0	1.0	83.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292692 - 12861016 Smart Lotis Recessed 48 1x IP55 LED 3000K Medium DE Silver Bronze Brushed	83.0	1.0	83.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005086701 - 12861032 Smart Lotis Recessed 48 1x IP55 LED 3000K Medium DE Black Structure	81.0	1.0	81.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292693 - 12861043 Smart Lotis Recessed 48 1x IP55 LED 3000K Medium DE Black Brushed	81.0	1.0	81.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005598301 - 12861046 Smart Lotis Recessed 48 1x IP55 LED 3000K Medium DE Gold Matt	83.0	1.0	83.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005339001 - 12861109 Smart Lotis Recessed 48 1x IP55 LED 2700K Medium DE White Structure	81.0	1.0	81.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292694 - 12861114 Smart Lotis Recessed 48 1x IP55 LED 2700K Medium DE Bronze Brushed	78.0	1.0	78.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292695 - 12861115 Smart Lotis Recessed 48 1x IP55 LED 2700K Medium DE Champagne Brushed	78.0	1.0	78.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9

915006292696 - 12861116 Smart Lotis Recessed 48 1x IP55 LED 2700K Medium DE Silver Bronze Brushed	79.0	1.0	79.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005339101 - 12861132 Smart Lotis Recessed 48 1x IP55 LED 2700K Medium DE Black Structure	77.0	1.0	77.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292697 - 12861143 Smart Lotis Recessed 48 1x IP55 LED 2700K Medium DE Black Brushed	77.0	1.0	77.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005598401 - 12861146 Smart Lotis Recessed 48 1x IP55 LED 2700K Medium DE Gold Matt	79.0	1.0	79.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005340601 - 12861209 Smart Lotis Recessed 48 1x IP55 LED 4000K Medium DE White Structure	94.0	1.0	94.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292698 - 12861214 Smart Lotis Recessed 48 1x IP55 LED 4000K Medium DE Bronze Brushed	90.0	1.0	90.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292699 - 12861215 Smart Lotis Recessed 48 1x IP55 LED 4000K Medium DE Champagne Brushed	91.0	1.0	91.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292701 - 12861216 Smart Lotis Recessed 48 1x IP55 LED 4000K Medium DE Silver Bronze Brushed	91.0	1.0	91.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005340701 - 12861232 Smart Lotis Recessed 48 1x IP55 LED 4000K Medium DE Black Structure	89.0	1.0	89.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292702 - 12861243 Smart Lotis Recessed 48 1x IP55 LED 4000K Medium DE Black Brushed	90.0	1.0	90.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005598501 - 12861246 Smart Lotis Recessed 48 1x IP55 LED 4000K Medium DE Gold Matt	91.0	1.0	91.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005934301 - 12861309 Smart Lotis Recessed 48 1x IP55 LED 1800-3000K WD Medium DE White Structure	180.0	4.0	45.0	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915006292703 - 12861314 Smart Lotis Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Bronze Brushed	169.0	4.0	42.2	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915006292704 - 12861315 Smart Lotis Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Champagne Brushed	182.0	4.0	45.5	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915006292705 - 12861316 Smart Lotis Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Silver Bronze Brushed	183.0	4.0	45.8	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6

915005934401 - 12861332 Smart Lotus Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Black Structure	165.0	4.0	41.2	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915006292706 - 12861343 Smart Lotus Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Black Brushed	169.0	4.0	42.2	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915005934501 - 12861346 Smart Lotus Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Gold Matt	175.0	4.0	43.8	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915005086001 - 12871009 Smart Cake Recessed 48 1x IP55 LED 3000K Medium DE White Structure	71.0	1.0	71.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292731 - 12871014 Smart Cake Recessed 48 1x IP55 LED 3000K Medium DE Bronze Brushed	67.0	1.0	67.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292732 - 12871015 Smart Cake Recessed 48 1x IP55 LED 3000K Medium DE Champagne Brushed	70.0	1.0	70.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292733 - 12871016 Smart Cake Recessed 48 1x IP55 LED 3000K Medium DE Silver Bronze Brushed	70.0	1.0	70.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005085901 - 12871032 Smart Cake Recessed 48 1x IP55 LED 3000K Medium DE Black Structure	67.0	1.0	67.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292734 - 12871043 Smart Cake Recessed 48 1x IP55 LED 3000K Medium DE Black Brushed	66.0	1.0	66.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005598901 - 12871046 Smart Cake Recessed 48 1x IP55 LED 3000K Medium DE Gold Matt	66.0	1.0	66.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005339401 - 12871109 Smart Cake Recessed 48 1x IP55 LED 2700K Medium DE White Structure	67.0	1.0	67.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292735 - 12871114 Smart Cake Recessed 48 1x IP55 LED 2700K Medium DE Bronze Brushed	63.0	1.0	63.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292736 - 12871115 Smart Cake Recessed 48 1x IP55 LED 2700K Medium DE Champagne Brushed	66.0	1.0	66.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292737 - 12871116 Smart Cake Recessed 48 1x IP55 LED 2700K Medium DE Silver Bronze Brushed	66.0	1.0	66.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005339501 - 12871132 Smart Cake Recessed 48 1x IP55 LED 2700K Medium DE Black Structure	64.0	1.0	64.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9

915006292738 - 12871143 Smart Cake Recessed 48 1x IP55 LED 2700K Medium DE Black Brushed	63.0	1.0	63.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005599001 - 12871146 Smart Cake Recessed 48 1x IP55 LED 2700K Medium DE Gold Matt	63.0	1.0	63.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005341001 - 12871209 Smart Cake Recessed 48 1x IP55 LED 4000K Medium DE White Structure	78.0	1.0	78.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292739 - 12871214 Smart Cake Recessed 48 1x IP55 LED 4000K Medium DE Bronze Brushed	74.0	1.0	74.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292740 - 12871215 Smart Cake Recessed 48 1x IP55 LED 4000K Medium DE Champagne Brushed	77.0	1.0	77.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292741 - 12871216 Smart Cake Recessed 48 1x IP55 LED 4000K Medium DE Silver Bronze Brushed	77.0	1.0	77.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005341101 - 12871232 Smart Cake Recessed 48 1x IP55 LED 4000K Medium DE Black Structure	74.0	1.0	74.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292742 - 12871243 Smart Cake Recessed 48 1x IP55 LED 4000K Medium DE Black Brushed	73.0	1.0	73.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005599101 - 12871246 Smart Cake Recessed 48 1x IP55 LED 4000K Medium DE Gold Matt	73.0	1.0	73.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005935201 - 12871309 Smart Cake Recessed 48 1x IP55 LED 1800-3000K WD Medium DE White Structure	121.0	4.0	30.2	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915006292743 - 12871314 Smart Cake Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Bronze Brushed	96.0	4.0	24.0	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915006292744 - 12871315 Smart Cake Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Champagne Brushed	110.0	4.0	27.5	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915006292745 - 12871316 Smart Cake Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Silver Bronze Brushed	113.0	4.0	28.2	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915005935301 - 12871332 Smart Cake Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Black Structure	89.0	4.0	22.2	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915006292746 - 12871343 Smart Cake Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Black Brushed	94.0	4.0	23.5	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6

915005935401 - 12871346 Smart Cake Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Gold Matt	109.0	4.0	27.2	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915005086401 - 12881009 Smart Kup Recessed 48 1x IP55 LED 3000K Medium DE White Structure	85.0	1.0	85.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292771 - 12881014 Smart Kup Recessed 48 1x IP55 LED 3000K Medium DE Bronze Brushed	82.0	1.0	82.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292772 - 12881015 Smart Kup Recessed 48 1x IP55 LED 3000K Medium DE Champagne Brushed	83.0	1.0	83.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292773 - 12881016 Smart Kup Recessed 48 1x IP55 LED 3000K Medium DE Silver Bronze Brushed	83.0	1.0	83.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005086301 - 12881032 Smart Kup Recessed 48 1x IP55 LED 3000K Medium DE Black Structure	81.0	1.0	81.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292774 - 12881043 Smart Kup Recessed 48 1x IP55 LED 3000K Medium DE Black Brushed	82.0	1.0	82.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005599501 - 12881046 Smart Kup Recessed 48 1x IP55 LED 3000K Medium DE Gold Matt	80.0	1.0	80.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005339801 - 12881109 Smart Kup Recessed 48 1x IP55 LED 2700K Medium DE White Structure	81.0	1.0	81.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292775 - 12881114 Smart Kup Recessed 48 1x IP55 LED 2700K Medium DE Bronze Brushed	78.0	1.0	78.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292776 - 12881115 Smart Kup Recessed 48 1x IP55 LED 2700K Medium DE Champagne Brushed	79.0	1.0	79.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292777 - 12881116 Smart Kup Recessed 48 1x IP55 LED 2700K Medium DE Silver Bronze Brushed	79.0	1.0	79.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005339901 - 12881132 Smart Kup Recessed 48 1x IP55 LED 2700K Medium DE Black Structure	77.0	1.0	77.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292778 - 12881143 Smart Kup Recessed 48 1x IP55 LED 2700K Medium DE Black Brushed	78.0	1.0	78.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005599601 - 12881146 Smart Kup Recessed 48 1x IP55 LED 2700K Medium DE Gold Matt	76.0	1.0	76.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9

915005341401 - 12881209 Smart Kup Recessed 48 1x IP55 LED 4000K Medium DE White Structure	94.0	1.0	94.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292779 - 12881214 Smart Kup Recessed 48 1x IP55 LED 4000K Medium DE Bronze Brushed	90.0	1.0	90.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292780 - 12881215 Smart Kup Recessed 48 1x IP55 LED 4000K Medium DE Champagne Brushed	91.0	1.0	91.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292781 - 12881216 Smart Kup Recessed 48 1x IP55 LED 4000K Medium DE Silver Bronze Brushed	92.0	1.0	92.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005341501 - 12881232 Smart Kup Recessed 48 1x IP55 LED 4000K Medium DE Black Structure	89.0	1.0	89.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292782 - 12881243 Smart Kup Recessed 48 1x IP55 LED 4000K Medium DE Black Brushed	90.0	1.0	90.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005599701 - 12881246 Smart Kup Recessed 48 1x IP55 LED 4000K Medium DE Gold Matt	88.0	1.0	88.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005934601 - 12881309 Smart Kup Recessed 48 1x IP55 LED 1800-3000K WD Medium DE White Structure	184.0	4.0	46.0	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915006292783 - 12881314 Smart Kup Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Bronze Brushed	178.0	4.0	44.5	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915006292784 - 12881315 Smart Kup Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Champagne Brushed	187.0	4.0	46.8	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915006292785 - 12881316 Smart Kup Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Silver Bronze Brushed	189.0	4.0	47.2	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915005934701 - 12881332 Smart Kup Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Black Structure	170.0	4.0	42.5	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915006292786 - 12881343 Smart Kup Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Black Brushed	176.0	4.0	44.0	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915005934801 - 12881346 Smart Kup Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Gold Matt	181.0	4.0	45.2	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915005087201 - 12891009 Smart Lotus Asy Recessed 48 1x IP55 LED 3000K Medium DE White Structure	83.0	1.0	83.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9

915006292812 - 12891014 Smart Lotis Asy Recessed 48 1x IP55 LED 3000K Medium DE Bronze Brushed	72.0	1.0	72.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292813 - 12891015 Smart Lotis Asy Recessed 48 1x IP55 LED 3000K Medium DE Champagne Brushed	74.0	1.0	74.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292814 - 12891016 Smart Lotis Asy Recessed 48 1x IP55 LED 3000K Medium DE Silver Bronze Brushed	74.0	1.0	74.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005087101 - 12891032 Smart Lotis Asy Recessed 48 1x IP55 LED 3000K Medium DE Black Structure	78.0	1.0	78.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292815 - 12891043 Smart Lotis Asy Recessed 48 1x IP55 LED 3000K Medium DE Black Brushed	71.0	1.0	71.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005600101 - 12891046 Smart Lotis Asy Recessed 48 1x IP55 LED 3000K Medium DE Gold Matt	75.0	1.0	75.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005340201 - 12891109 Smart Lotis Asy Recessed 48 1x IP55 LED 2700K Medium DE White Structure	78.0	1.0	78.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292816 - 12891114 Smart Lotis Asy Recessed 48 1x IP55 LED 2700K Medium DE Bronze Brushed	68.0	1.0	68.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292817 - 12891115 Smart Lotis Asy Recessed 48 1x IP55 LED 2700K Medium DE Champagne Brushed	70.0	1.0	70.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292818 - 12891116 Smart Lotis Asy Recessed 48 1x IP55 LED 2700K Medium DE Silver Bronze Brushed	70.0	1.0	70.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005340301 - 12891132 Smart Lotis Asy Recessed 48 1x IP55 LED 2700K Medium DE Black Structure	74.0	1.0	74.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292819 - 12891143 Smart Lotis Asy Recessed 48 1x IP55 LED 2700K Medium DE Black Brushed	68.0	1.0	68.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005600201 - 12891146 Smart Lotis Asy Recessed 48 1x IP55 LED 2700K Medium DE Gold Matt	71.0	1.0	71.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005341801 - 12891209 Smart Lotis Asy Recessed 48 1x IP55 LED 4000K Medium DE White Structure	91.0	1.0	91.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292820 - 12891214 Smart Lotis Asy Recessed 48 1x IP55 LED 4000K Medium DE Bronze Brushed	79.0	1.0	79.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9

915006292821 - 12891215 Smart Lotis Asy Recessed 48 1x IP55 LED 4000K Medium DE Champagne Brushed	81.0	1.0	81.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292822 - 12891216 Smart Lotis Asy Recessed 48 1x IP55 LED 4000K Medium DE Silver Bronze Brushed	82.0	1.0	82.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005341901 - 12891232 Smart Lotis Asy Recessed 48 1x IP55 LED 4000K Medium DE Black Structure	86.0	1.0	86.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915006292823 - 12891243 Smart Lotis Asy Recessed 48 1x IP55 LED 4000K Medium DE Black Brushed	79.0	1.0	79.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005600301 - 12891246 Smart Lotis Asy Recessed 48 1x IP55 LED 4000K Medium DE Gold Matt	83.0	1.0	83.0	1.0	1.0	0.75	0.75	0.55	19.8	14.9	14.9	10.9
915005934901 - 12891309 Smart Lotis Asy Recessed 48 1x IP55 LED 1800-3000K WD Medium DE White Structure	160.0	4.0	40.0	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915006292824 - 12891314 Smart Lotis Asy Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Bronze Brushed	137.0	4.0	34.2	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915006292825 - 12891315 Smart Lotis Asy Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Champagne Brushed	156.0	4.0	39.0	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915006292826 - 12891316 Smart Lotis Asy Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Silver Bronze Brushed	157.0	4.0	39.2	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915005935001 - 12891332 Smart Lotis Asy Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Black Structure	140.0	4.0	35.0	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915006292827 - 12891343 Smart Lotis Asy Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Black Brushed	138.0	4.0	34.5	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6
915005935101 - 12891346 Smart Lotis Asy Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Gold Matt	155.0	4.0	38.8	4.0	4.0	3.0	3.0	2.2	79.2	59.4	59.4	43.6

* Note that if the product is non-dimmable, only the values for "NC (No Control)" are valid; if the driver type is PSU, only the values for "NC (No Control)" and "PS (presence sensing)" are valid.

APPENDIX (PEP ECOPASSPORT ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaires (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management functions, the lumen output (O_{lum}) and reference service life (RSL) of each product within the same product family.

To calculate the Scaled Impact (SI_{pep}), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in question P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminaire (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output (O_{lum}) and reference service lifetime (RSL) of the product to estimate the final environmental impact. The scaled impact (SI_{pep}) is presented in Table A4.

$$GSF = \frac{FU_{pep}}{FU_p} = \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$

3. Calculate the GWP scaling factor (PGSF), by multiplying the PSF by the GSF.

$$PGSF = PSF * GSF$$

4. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PGSF * CSF$$

Table A3: Light management functions (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

5. Lastly, the GWP of the base variant is then scaled by the TSF.

$$\text{Scaled GWP} = \text{GWP}_{\text{case}} * \text{TSF}$$

As described in the EPD, calculations are made based on dataset describing electricity available on the low voltage level in Europe for year 2022 (source Ecoinvent 3.8 database). This value should be adjusted depending on specific project requirements. Presented controls factors and functional unit conversion values are based on the PEP EcoPassport PSR for luminaires (PSR-0014-ed2.0-EN-2023 07 13). Please refer to this publication or contact Signify directly for more information.

Table A4 Scale impact per scaling factor (PEP EcoPassport aligned)

Configuration	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
915005086801 - 12861009 Smart Lotis Recessed 48 1x IP55 LED 3000K Medium DE White Structure	85.0	1.0	85.0	1.0	8.235	6.176	6.176	4.529	163.1	122.3	122.3	89.7
915006292690 - 12861014 Smart Lotis Recessed 48 1x IP55 LED 3000K Medium DE Bronze Brushed	82.0	1.0	82.0	1.0	8.537	6.403	6.403	4.695	169.0	126.8	126.8	93.0
915006292691 - 12861015 Smart Lotis Recessed 48 1x IP55 LED 3000K Medium DE Champagne Brushed	83.0	1.0	83.0	1.0	8.434	6.325	6.325	4.639	167.0	125.2	125.2	91.9
915006292692 - 12861016 Smart Lotis Recessed 48 1x IP55 LED 3000K Medium DE Silver Bronze Brushed	83.0	1.0	83.0	1.0	8.434	6.325	6.325	4.639	167.0	125.2	125.2	91.9

915005086701 - 12861032 Smart Lotis Recessed 48 1x IP55 LED 3000K Medium DE Black Structure	81.0	1.0	81.0	1.0	8.642	6.481	6.481	4.753	171.1	128.3	128.3	94.1
915006292693 - 12861043 Smart Lotis Recessed 48 1x IP55 LED 3000K Medium DE Black Brushed	81.0	1.0	81.0	1.0	8.642	6.481	6.481	4.753	171.1	128.3	128.3	94.1
915005598301 - 12861046 Smart Lotis Recessed 48 1x IP55 LED 3000K Medium DE Gold Matt	83.0	1.0	83.0	1.0	8.434	6.325	6.325	4.639	167.0	125.2	125.2	91.9
915005339001 - 12861109 Smart Lotis Recessed 48 1x IP55 LED 2700K Medium DE White Structure	81.0	1.0	81.0	1.0	8.642	6.481	6.481	4.753	171.1	128.3	128.3	94.1
915006292694 - 12861114 Smart Lotis Recessed 48 1x IP55 LED 2700K Medium DE Bronze Brushed	78.0	1.0	78.0	1.0	8.974	6.731	6.731	4.936	177.7	133.3	133.3	97.7
915006292695 - 12861115 Smart Lotis Recessed 48 1x IP55 LED 2700K Medium DE Champagne Brushed	78.0	1.0	78.0	1.0	8.974	6.731	6.731	4.936	177.7	133.3	133.3	97.7
915006292696 - 12861116 Smart Lotis Recessed 48 1x IP55 LED 2700K Medium DE Silver Bronze Brushed	79.0	1.0	79.0	1.0	8.861	6.646	6.646	4.874	175.4	131.6	131.6	96.5
915005339101 - 12861132 Smart Lotis Recessed 48 1x IP55 LED 2700K Medium DE Black Structure	77.0	1.0	77.0	1.0	9.091	6.818	6.818	5.0	180.0	135.0	135.0	99.0
915006292697 - 12861143 Smart Lotis Recessed 48 1x IP55 LED 2700K Medium DE Black Brushed	77.0	1.0	77.0	1.0	9.091	6.818	6.818	5.0	180.0	135.0	135.0	99.0
915005598401 - 12861146 Smart Lotis Recessed 48 1x IP55 LED 2700K Medium DE Gold Matt	79.0	1.0	79.0	1.0	8.861	6.646	6.646	4.874	175.4	131.6	131.6	96.5
915005340601 - 12861209 Smart Lotis Recessed 48 1x IP55 LED 4000K Medium DE White Structure	94.0	1.0	94.0	1.0	7.447	5.585	5.585	4.096	147.5	110.6	110.6	81.1
915006292698 - 12861214 Smart Lotis Recessed 48 1x IP55 LED 4000K Medium DE Bronze Brushed	90.0	1.0	90.0	1.0	7.778	5.833	5.833	4.278	154.0	115.5	115.5	84.7
915006292699 - 12861215 Smart Lotis Recessed 48 1x IP55 LED 4000K Medium DE Champagne Brushed	91.0	1.0	91.0	1.0	7.692	5.769	5.769	4.231	152.3	114.2	114.2	83.8
915006292701 - 12861216 Smart Lotis Recessed 48 1x IP55 LED 4000K Medium DE Silver Bronze Brushed	91.0	1.0	91.0	1.0	7.692	5.769	5.769	4.231	152.3	114.2	114.2	83.8
915005340701 - 12861232 Smart Lotis Recessed 48 1x IP55 LED 4000K Medium DE Black Structure	89.0	1.0	89.0	1.0	7.865	5.899	5.899	4.326	155.7	116.8	116.8	85.7

915006292702 - 12861243 Smart Lotis Recessed 48 1x IP55 LED 4000K Medium DE Black Brushed	90.0	1.0	90.0	1.0	7.778	5.833	5.833	4.278	154.0	115.5	115.5	84.7
915005598501 - 12861246 Smart Lotis Recessed 48 1x IP55 LED 4000K Medium DE Gold Matt	91.0	1.0	91.0	1.0	7.692	5.769	5.769	4.231	152.3	114.2	114.2	83.8
915005934301 - 12861309 Smart Lotis Recessed 48 1x IP55 LED 1800-3000K WD Medium DE White Structure	180.0	4.0	45.0	4.0	15.556	11.667	11.667	8.556	308.0	231.0	231.0	169.4
915006292703 - 12861314 Smart Lotis Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Bronze Brushed	169.0	4.0	42.2	4.0	16.568	12.426	12.426	9.112	328.0	246.0	246.0	180.4
915006292704 - 12861315 Smart Lotis Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Champagne Brushed	182.0	4.0	45.5	4.0	15.384	11.538	11.538	8.461	304.6	228.5	228.5	167.5
915006292705 - 12861316 Smart Lotis Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Silver Bronze Brushed	183.0	4.0	45.8	4.0	15.3	11.475	11.475	8.415	302.9	227.2	227.2	166.6
915005934401 - 12861332 Smart Lotis Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Black Structure	165.0	4.0	41.2	4.0	16.968	12.726	12.726	9.332	336.0	252.0	252.0	184.8
915006292706 - 12861343 Smart Lotis Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Black Brushed	169.0	4.0	42.2	4.0	16.568	12.426	12.426	9.112	328.0	246.0	246.0	180.4
915005934501 - 12861346 Smart Lotis Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Gold Matt	175.0	4.0	43.8	4.0	16.0	12.0	12.0	8.8	316.8	237.6	237.6	174.2
915005086001 - 12871009 Smart Cake Recessed 48 1x IP55 LED 3000K Medium DE White Structure	71.0	1.0	71.0	1.0	9.859	7.394	7.394	5.422	195.2	146.4	146.4	107.4
915006292731 - 12871014 Smart Cake Recessed 48 1x IP55 LED 3000K Medium DE Bronze Brushed	67.0	1.0	67.0	1.0	10.448	7.836	7.836	5.746	206.9	155.2	155.2	113.8
915006292732 - 12871015 Smart Cake Recessed 48 1x IP55 LED 3000K Medium DE Champagne Brushed	70.0	1.0	70.0	1.0	10.0	7.5	7.5	5.5	198.0	148.5	148.5	108.9
915006292733 - 12871016 Smart Cake Recessed 48 1x IP55 LED 3000K Medium DE Silver Bronze Brushed	70.0	1.0	70.0	1.0	10.0	7.5	7.5	5.5	198.0	148.5	148.5	108.9
915005085901 - 12871032 Smart Cake Recessed 48 1x IP55 LED 3000K Medium DE Black Structure	67.0	1.0	67.0	1.0	10.448	7.836	7.836	5.746	206.9	155.2	155.2	113.8
915006292734 - 12871043 Smart Cake Recessed 48 1x IP55 LED 3000K Medium DE Black Brushed	66.0	1.0	66.0	1.0	10.606	7.954	7.954	5.833	210.0	157.5	157.5	115.5

915005598901 - 12871046 Smart Cake Recessed 48 1x IP55 LED 3000K Medium DE Gold Matt	66.0	1.0	66.0	1.0	10.606	7.954	7.954	5.833	210.0	157.5	157.5	115.5
915005339401 - 12871109 Smart Cake Recessed 48 1x IP55 LED 2700K Medium DE White Structure	67.0	1.0	67.0	1.0	10.448	7.836	7.836	5.746	206.9	155.2	155.2	113.8
915006292735 - 12871114 Smart Cake Recessed 48 1x IP55 LED 2700K Medium DE Bronze Brushed	63.0	1.0	63.0	1.0	11.111	8.333	8.333	6.111	220.0	165.0	165.0	121.0
915006292736 - 12871115 Smart Cake Recessed 48 1x IP55 LED 2700K Medium DE Champagne Brushed	66.0	1.0	66.0	1.0	10.606	7.954	7.954	5.833	210.0	157.5	157.5	115.5
915006292737 - 12871116 Smart Cake Recessed 48 1x IP55 LED 2700K Medium DE Silver Bronze Brushed	66.0	1.0	66.0	1.0	10.606	7.954	7.954	5.833	210.0	157.5	157.5	115.5
915005339501 - 12871132 Smart Cake Recessed 48 1x IP55 LED 2700K Medium DE Black Structure	64.0	1.0	64.0	1.0	10.938	8.204	8.204	6.016	216.6	162.4	162.4	119.1
915006292738 - 12871143 Smart Cake Recessed 48 1x IP55 LED 2700K Medium DE Black Brushed	63.0	1.0	63.0	1.0	11.111	8.333	8.333	6.111	220.0	165.0	165.0	121.0
915005599001 - 12871146 Smart Cake Recessed 48 1x IP55 LED 2700K Medium DE Gold Matt	63.0	1.0	63.0	1.0	11.111	8.333	8.333	6.111	220.0	165.0	165.0	121.0
915005341001 - 12871209 Smart Cake Recessed 48 1x IP55 LED 4000K Medium DE White Structure	78.0	1.0	78.0	1.0	8.974	6.731	6.731	4.936	177.7	133.3	133.3	97.7
915006292739 - 12871214 Smart Cake Recessed 48 1x IP55 LED 4000K Medium DE Bronze Brushed	74.0	1.0	74.0	1.0	9.459	7.094	7.094	5.202	187.3	140.5	140.5	103.0
915006292740 - 12871215 Smart Cake Recessed 48 1x IP55 LED 4000K Medium DE Champagne Brushed	77.0	1.0	77.0	1.0	9.091	6.818	6.818	5.0	180.0	135.0	135.0	99.0
915006292741 - 12871216 Smart Cake Recessed 48 1x IP55 LED 4000K Medium DE Silver Bronze Brushed	77.0	1.0	77.0	1.0	9.091	6.818	6.818	5.0	180.0	135.0	135.0	99.0
915005341101 - 12871232 Smart Cake Recessed 48 1x IP55 LED 4000K Medium DE Black Structure	74.0	1.0	74.0	1.0	9.459	7.094	7.094	5.202	187.3	140.5	140.5	103.0
915006292742 - 12871243 Smart Cake Recessed 48 1x IP55 LED 4000K Medium DE Black Brushed	73.0	1.0	73.0	1.0	9.589	7.192	7.192	5.274	189.9	142.4	142.4	104.4
915005599101 - 12871246 Smart Cake Recessed 48 1x IP55 LED 4000K Medium DE Gold Matt	73.0	1.0	73.0	1.0	9.589	7.192	7.192	5.274	189.9	142.4	142.4	104.4

915005935201 - 12871309 Smart Cake Recessed 48 1x IP55 LED 1800-3000K WD Medium DE White Structure	121.0	4.0	30.2	4.0	23.14	17.355	17.355	12.727	458.2	343.6	343.6	252.0
915006292743 - 12871314 Smart Cake Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Bronze Brushed	96.0	4.0	24.0	4.0	29.168	21.876	21.876	16.042	577.5	433.1	433.1	317.6
915006292744 - 12871315 Smart Cake Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Champagne Brushed	110.0	4.0	27.5	4.0	25.456	19.092	19.092	14.001	504.0	378.0	378.0	277.2
915006292745 - 12871316 Smart Cake Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Silver Bronze Brushed	113.0	4.0	28.2	4.0	24.78	18.585	18.585	13.629	490.6	368.0	368.0	269.9
915005935301 - 12871332 Smart Cake Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Black Structure	89.0	4.0	22.2	4.0	31.46	23.595	23.595	17.303	622.9	467.2	467.2	342.6
915006292746 - 12871343 Smart Cake Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Black Brushed	94.0	4.0	23.5	4.0	29.788	22.341	22.341	16.383	589.8	442.4	442.4	324.4
915005935401 - 12871346 Smart Cake Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Gold Matt	109.0	4.0	27.2	4.0	25.688	19.266	19.266	14.128	508.6	381.5	381.5	279.7
915005086401 - 12881009 Smart Kup Recessed 48 1x IP55 LED 3000K Medium DE White Structure	85.0	1.0	85.0	1.0	8.235	6.176	6.176	4.529	163.1	122.3	122.3	89.7
915006292771 - 12881014 Smart Kup Recessed 48 1x IP55 LED 3000K Medium DE Bronze Brushed	82.0	1.0	82.0	1.0	8.537	6.403	6.403	4.695	169.0	126.8	126.8	93.0
915006292772 - 12881015 Smart Kup Recessed 48 1x IP55 LED 3000K Medium DE Champagne Brushed	83.0	1.0	83.0	1.0	8.434	6.325	6.325	4.639	167.0	125.2	125.2	91.9
915006292773 - 12881016 Smart Kup Recessed 48 1x IP55 LED 3000K Medium DE Silver Bronze Brushed	83.0	1.0	83.0	1.0	8.434	6.325	6.325	4.639	167.0	125.2	125.2	91.9
915005086301 - 12881032 Smart Kup Recessed 48 1x IP55 LED 3000K Medium DE Black Structure	81.0	1.0	81.0	1.0	8.642	6.481	6.481	4.753	171.1	128.3	128.3	94.1
915006292774 - 12881043 Smart Kup Recessed 48 1x IP55 LED 3000K Medium DE Black Brushed	82.0	1.0	82.0	1.0	8.537	6.403	6.403	4.695	169.0	126.8	126.8	93.0
915005599501 - 12881046 Smart Kup Recessed 48 1x IP55 LED 3000K Medium DE Gold Matt	80.0	1.0	80.0	1.0	8.75	6.562	6.562	4.812	173.2	129.9	129.9	95.3
915005339801 - 12881109 Smart Kup Recessed 48 1x IP55 LED 2700K Medium DE White Structure	81.0	1.0	81.0	1.0	8.642	6.481	6.481	4.753	171.1	128.3	128.3	94.1

915006292775 - 12881114 Smart Kup Recessed 48 1x IP55 LED 2700K Medium DE Bronze Brushed	78.0	1.0	78.0	1.0	8.974	6.731	6.731	4.936	177.7	133.3	133.3	97.7
915006292776 - 12881115 Smart Kup Recessed 48 1x IP55 LED 2700K Medium DE Champagne Brushed	79.0	1.0	79.0	1.0	8.861	6.646	6.646	4.874	175.4	131.6	131.6	96.5
915006292777 - 12881116 Smart Kup Recessed 48 1x IP55 LED 2700K Medium DE Silver Bronze Brushed	79.0	1.0	79.0	1.0	8.861	6.646	6.646	4.874	175.4	131.6	131.6	96.5
915005339901 - 12881132 Smart Kup Recessed 48 1x IP55 LED 2700K Medium DE Black Structure	77.0	1.0	77.0	1.0	9.091	6.818	6.818	5.0	180.0	135.0	135.0	99.0
915006292778 - 12881143 Smart Kup Recessed 48 1x IP55 LED 2700K Medium DE Black Brushed	78.0	1.0	78.0	1.0	8.974	6.731	6.731	4.936	177.7	133.3	133.3	97.7
915005599601 - 12881146 Smart Kup Recessed 48 1x IP55 LED 2700K Medium DE Gold Matt	76.0	1.0	76.0	1.0	9.211	6.908	6.908	5.066	182.4	136.8	136.8	100.3
915005341401 - 12881209 Smart Kup Recessed 48 1x IP55 LED 4000K Medium DE White Structure	94.0	1.0	94.0	1.0	7.447	5.585	5.585	4.096	147.5	110.6	110.6	81.1
915006292779 - 12881214 Smart Kup Recessed 48 1x IP55 LED 4000K Medium DE Bronze Brushed	90.0	1.0	90.0	1.0	7.778	5.833	5.833	4.278	154.0	115.5	115.5	84.7
915006292780 - 12881215 Smart Kup Recessed 48 1x IP55 LED 4000K Medium DE Champagne Brushed	91.0	1.0	91.0	1.0	7.692	5.769	5.769	4.231	152.3	114.2	114.2	83.8
915006292781 - 12881216 Smart Kup Recessed 48 1x IP55 LED 4000K Medium DE Silver Bronze Brushed	92.0	1.0	92.0	1.0	7.609	5.707	5.707	4.185	150.7	113.0	113.0	82.9
915005341501 - 12881232 Smart Kup Recessed 48 1x IP55 LED 4000K Medium DE Black Structure	89.0	1.0	89.0	1.0	7.865	5.899	5.899	4.326	155.7	116.8	116.8	85.7
915006292782 - 12881243 Smart Kup Recessed 48 1x IP55 LED 4000K Medium DE Black Brushed	90.0	1.0	90.0	1.0	7.778	5.833	5.833	4.278	154.0	115.5	115.5	84.7
915005599701 - 12881246 Smart Kup Recessed 48 1x IP55 LED 4000K Medium DE Gold Matt	88.0	1.0	88.0	1.0	7.955	5.966	5.966	4.375	157.5	118.1	118.1	86.6
915005934601 - 12881309 Smart Kup Recessed 48 1x IP55 LED 1800-3000K WD Medium DE White Structure	184.0	4.0	46.0	4.0	15.216	11.412	11.412	8.369	301.3	226.0	226.0	165.7
915006292783 - 12881314 Smart Kup Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Bronze Brushed	178.0	4.0	44.5	4.0	15.732	11.799	11.799	8.653	311.5	233.6	233.6	171.3

915006292784 - 12881315 Smart Kup Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Champagne Brushed	187.0	4.0	46.8	4.0	14.972	11.229	11.229	8.235	296.4	222.3	222.3	163.1
915006292785 - 12881316 Smart Kup Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Silver Bronze Brushed	189.0	4.0	47.2	4.0	14.816	11.112	11.112	8.149	293.4	220.0	220.0	161.4
915005934701 - 12881332 Smart Kup Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Black Structure	170.0	4.0	42.5	4.0	16.472	12.354	12.354	9.06	326.1	244.6	244.6	179.4
915006292786 - 12881343 Smart Kup Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Black Brushed	176.0	4.0	44.0	4.0	15.908	11.931	11.931	8.749	315.0	236.2	236.2	173.2
915005934801 - 12881346 Smart Kup Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Gold Matt	181.0	4.0	45.2	4.0	15.468	11.601	11.601	8.507	306.3	229.7	229.7	168.4
915005087201 - 12891009 Smart Lotis Asy Recessed 48 1x IP55 LED 3000K Medium DE White Structure	83.0	1.0	83.0	1.0	8.434	6.325	6.325	4.639	167.0	125.2	125.2	91.9
915006292812 - 12891014 Smart Lotis Asy Recessed 48 1x IP55 LED 3000K Medium DE Bronze Brushed	72.0	1.0	72.0	1.0	9.722	7.291	7.291	5.347	192.5	144.4	144.4	105.9
915006292813 - 12891015 Smart Lotis Asy Recessed 48 1x IP55 LED 3000K Medium DE Champagne Brushed	74.0	1.0	74.0	1.0	9.459	7.094	7.094	5.202	187.3	140.5	140.5	103.0
915006292814 - 12891016 Smart Lotis Asy Recessed 48 1x IP55 LED 3000K Medium DE Silver Bronze Brushed	74.0	1.0	74.0	1.0	9.459	7.094	7.094	5.202	187.3	140.5	140.5	103.0
915005087101 - 12891032 Smart Lotis Asy Recessed 48 1x IP55 LED 3000K Medium DE Black Structure	78.0	1.0	78.0	1.0	8.974	6.731	6.731	4.936	177.7	133.3	133.3	97.7
915006292815 - 12891043 Smart Lotis Asy Recessed 48 1x IP55 LED 3000K Medium DE Black Brushed	71.0	1.0	71.0	1.0	9.859	7.394	7.394	5.422	195.2	146.4	146.4	107.4
915005600101 - 12891046 Smart Lotis Asy Recessed 48 1x IP55 LED 3000K Medium DE Gold Matt	75.0	1.0	75.0	1.0	9.333	7.0	7.0	5.133	184.8	138.6	138.6	101.6
915005340201 - 12891109 Smart Lotis Asy Recessed 48 1x IP55 LED 2700K Medium DE White Structure	78.0	1.0	78.0	1.0	8.974	6.731	6.731	4.936	177.7	133.3	133.3	97.7
915006292816 - 12891114 Smart Lotis Asy Recessed 48 1x IP55 LED 2700K Medium DE Bronze Brushed	68.0	1.0	68.0	1.0	10.294	7.721	7.721	5.662	203.8	152.9	152.9	112.1
915006292817 - 12891115 Smart Lotis Asy Recessed 48 1x IP55 LED 2700K Medium DE Champagne Brushed	70.0	1.0	70.0	1.0	10.0	7.5	7.5	5.5	198.0	148.5	148.5	108.9

915006292818 - 12891116 Smart Lotis Asy Recessed 48 1x IP55 LED 2700K Medium DE Silver Bronze Brushed	70.0	1.0	70.0	1.0	10.0	7.5	7.5	5.5	198.0	148.5	148.5	108.9
915005340301 - 12891132 Smart Lotis Asy Recessed 48 1x IP55 LED 2700K Medium DE Black Structure	74.0	1.0	74.0	1.0	9.459	7.094	7.094	5.202	187.3	140.5	140.5	103.0
915006292819 - 12891143 Smart Lotis Asy Recessed 48 1x IP55 LED 2700K Medium DE Black Brushed	68.0	1.0	68.0	1.0	10.294	7.721	7.721	5.662	203.8	152.9	152.9	112.1
915005600201 - 12891146 Smart Lotis Asy Recessed 48 1x IP55 LED 2700K Medium DE Gold Matt	71.0	1.0	71.0	1.0	9.859	7.394	7.394	5.422	195.2	146.4	146.4	107.4
915005341801 - 12891209 Smart Lotis Asy Recessed 48 1x IP55 LED 4000K Medium DE White Structure	91.0	1.0	91.0	1.0	7.692	5.769	5.769	4.231	152.3	114.2	114.2	83.8
915006292820 - 12891214 Smart Lotis Asy Recessed 48 1x IP55 LED 4000K Medium DE Bronze Brushed	79.0	1.0	79.0	1.0	8.861	6.646	6.646	4.874	175.4	131.6	131.6	96.5
915006292821 - 12891215 Smart Lotis Asy Recessed 48 1x IP55 LED 4000K Medium DE Champagne Brushed	81.0	1.0	81.0	1.0	8.642	6.481	6.481	4.753	171.1	128.3	128.3	94.1
915006292822 - 12891216 Smart Lotis Asy Recessed 48 1x IP55 LED 4000K Medium DE Silver Bronze Brushed	82.0	1.0	82.0	1.0	8.537	6.403	6.403	4.695	169.0	126.8	126.8	93.0
915005341901 - 12891232 Smart Lotis Asy Recessed 48 1x IP55 LED 4000K Medium DE Black Structure	86.0	1.0	86.0	1.0	8.14	6.105	6.105	4.477	161.2	120.9	120.9	88.6
915006292823 - 12891243 Smart Lotis Asy Recessed 48 1x IP55 LED 4000K Medium DE Black Brushed	79.0	1.0	79.0	1.0	8.861	6.646	6.646	4.874	175.4	131.6	131.6	96.5
915005600301 - 12891246 Smart Lotis Asy Recessed 48 1x IP55 LED 4000K Medium DE Gold Matt	83.0	1.0	83.0	1.0	8.434	6.325	6.325	4.639	167.0	125.2	125.2	91.9
915005934901 - 12891309 Smart Lotis Asy Recessed 48 1x IP55 LED 1800-3000K WD Medium DE White Structure	160.0	4.0	40.0	4.0	17.5	13.125	13.125	9.625	346.5	259.9	259.9	190.6
915006292824 - 12891314 Smart Lotis Asy Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Bronze Brushed	137.0	4.0	34.2	4.0	20.436	15.327	15.327	11.24	404.6	303.5	303.5	222.6
915006292825 - 12891315 Smart Lotis Asy Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Champagne Brushed	156.0	4.0	39.0	4.0	17.948	13.461	13.461	9.871	355.4	266.5	266.5	195.4
915006292826 - 12891316 Smart Lotis Asy Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Silver Bronze Brushed	157.0	4.0	39.2	4.0	17.836	13.377	13.377	9.81	353.2	264.9	264.9	194.2

915005935001 - 12891332 Smart Lotus Asy Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Black Structure	140.0	4.0	35.0	4.0	20.0	15.0	15.0	11.0	396.0	297.0	297.0	217.8
915006292827 - 12891343 Smart Lotus Asy Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Black Brushed	138.0	4.0	34.5	4.0	20.288	15.216	15.216	11.158	401.7	301.3	301.3	220.9
915005935101 - 12891346 Smart Lotus Asy Recessed 48 1x IP55 LED 1800-3000K WD Medium DE Gold Matt	155.0	4.0	38.8	4.0	18.064	13.548	13.548	9.935	357.7	268.3	268.3	196.7

** Note that if the product is non-dimmable, only the values for "NC (No Control)" are valid; if the driver type is PSU, only the values for "NC (No Control)" and "PS (presence sensing)" are valid.

ANNEX

USE PHASE (B6) VALUES FOR DIFFERENT COUNTRY MIX

The table in this annex is useful for conversion and comparison of B6 values with other energy country mix. The Global Warming Potential Total (GWP tot) value is illustrated for each country. The value refers to 1 kwh.

Example on how to use the table:

This EPD was done according to a specific customer use location that can be read in the paragraph **PRODUCT USE AND MAINTENANCE (B1-B7)**.

If for example the EPD was done according to EU energy mix and you want to see how the GWP total changes according to a Finland country energy mix, you can take the original value in the results table here highlighted in yellow:

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	5,88E+00	2,61E-01	-1,25E-01	6,02E+00	3,02E-01	5,41E-01	MND	MND	MND	MND	MND	4,06E+02	MND	MNR	1,77E-02	2,62E-01	1,88E-01	-1,09E+01

Divide that value according to the EU value from the following table (EU = 3,96E-01) and then multiplying for the Finland value from the same table (FINLAND = 2,70E-01).

Thus, the calculation of this example would be:

$$\text{New B6 GWP tot for Finland} = (4,06E+02 / 3,96E-01) \times 2,70E-01 = 2,76 E+02$$

Country	GWP tot (kg CO2 eq. per kwh)
AUSTRALIA	9,59E-01
AUSTRIA	3,37E-01
BELGIUM	2,63E-01
CHINA	1,14E+00
DENMARK	2,91E-01
EU	3,96E-01
FINLAND	2,70E-01
FRANCE	8,77E-02
GERMANY	5,32E-01
HUNGARY	4,67E-01
IRELAND	4,26E-01
ITALY	3,94E-01
LATAM	3,50E-01
NAM	4,83E-01
NETHERLANDS	5,88E-01
NORWAY	2,59E-02
POLAND	1,05E+00

PORUGAL	4,22E-01
ROW	7,32E-01
SPAIN	3,34E-01
SWEDEN	4,95E-02
SWITZERLAND	5,38E-02
UK	3,17E-01

Source Ecoinvent 3.8