
EXTRUDED STRIPPED SUSPENDED 46 1xLED WD FLOOD DE

137902XX_137905XX_137908XX

EXTRUDED STRIPPED LED MODULE

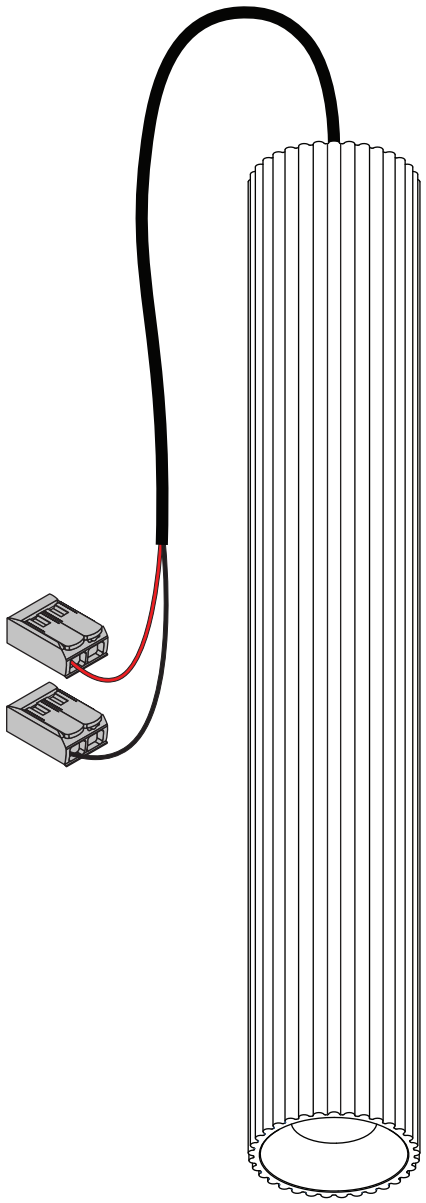


WARM DIM ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	15,5	18,5	6
+ RED		− BLACK	
For serial connection, respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.			

EXTRUDED STRIPPED CEILING SOLUTIONS - NOT INCLUDED


OPTION 1	CONNECTION HOUSING SURFACE DE	Ø52mm H78mm

137911XX




OPTION 2	CONNECTION HOUSING SEMI-RECESSED DE	Ø89mm H3,5mm

137910XX



OPTION 3	KOMPAS ROUND SURFACE 340	Ø340mm H52mm

13570XXX

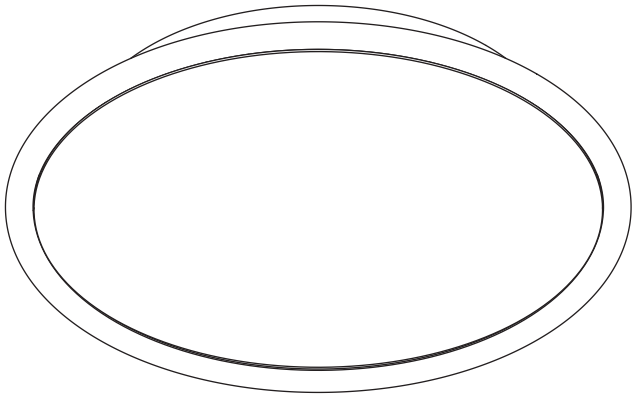

Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.
Reference number: 1014457

LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source.The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

III IP 20