

Nyto Semi-Recessed Adjustable 50 1x LED WD Flood DE

138470XX

1








WARM DIM
ELECTRICAL SPECS LED-FIXTURE

Drive current (mA)	Forward voltage		Power (W)
	min (Vf)	max (Vf)	
250	29,5	35,8	8,3
RED		BLACK	


For serial connection only, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED driver.


2

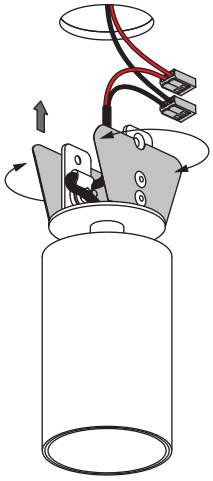

ONLY TO BE INSTALLED OUTSIDE ARM'S REACH

3







Uninstall

1






2




Minimum dimensions & volume requirements


In false ceiling:



In concrete:



In false ceiling with driver:

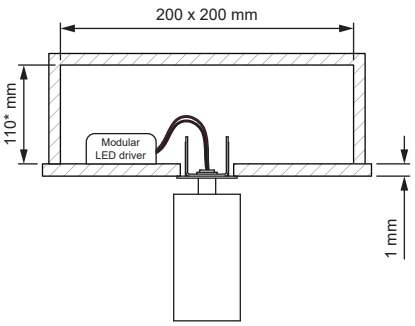

* also make sure to check the tilt-in height for drivers



Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.
Reference number: 1016425 (flood)



LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source and/or driver contained in this luminaire shall only be replaced by the manufcaturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

02 - 19/06/2026

III — IP 20 — UK CA — CE