


Nyto Track 48V Adjustable 30 2x LED


138220XX_138221XX_138222XX_138223XX_138224XX_138225XX_138226XX_138227XX_138228XX_138229XX_138230XX_138231XX

1.1 INSTALLATION



⚠ ONLY TO BE INSTALLED OUTSIDE ARM'S REACH

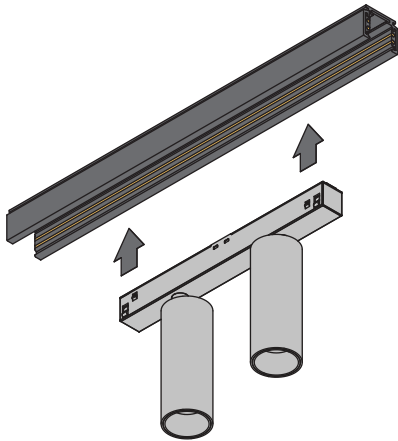



VOLTAGE	48 V
POWER spot	9.2 W
POWER medium, flood	12.7 W




1.2 INSTALLATION

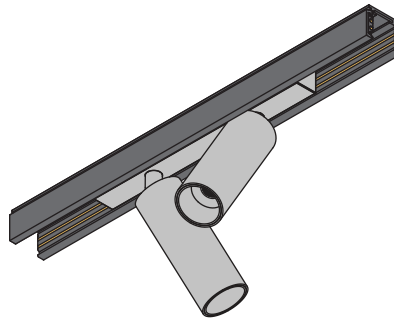

2.1 UNINSTALL


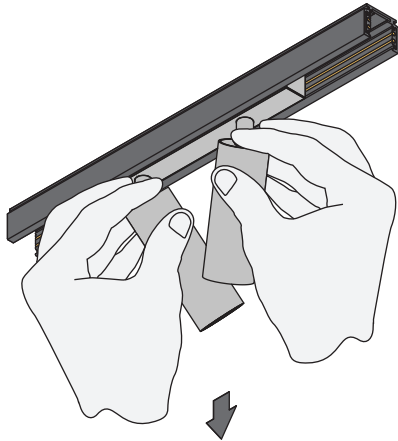


2.2 UNINSTALL

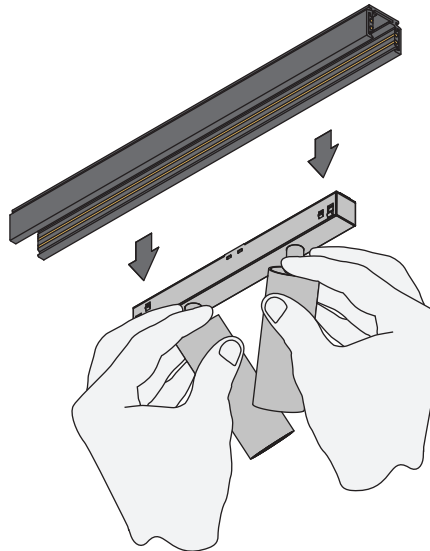

⚠ Turn off power before taking out luminaires from the track system

ELECTRICAL

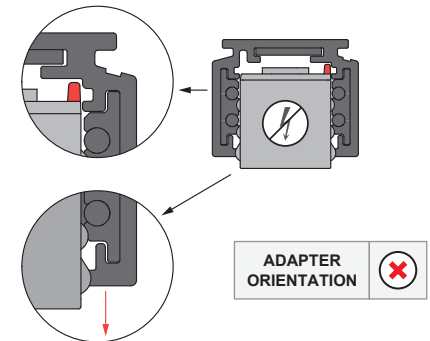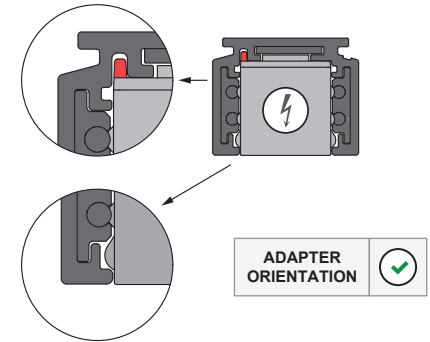

Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.
Reference number: 1016387 (spot and medium), 1016388 (flood).



LIGHT SOURCE - DO NOT TOUCH LED
Touching the LED can result in permanent damage of the light source. The light source and/or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE
A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.