


Nyto Track 48V Adjustable 30 1x LED


138201XX_138202XX_138204XX_138205XX_138207XX_138208XX_138210XX_138211XX_138213XX_138214XX_138216XX_138217XX_138218XX_138219XX

1.1 INSTALLATION



ONLY TO BE INSTALLED OUTSIDE ARM'S REACH

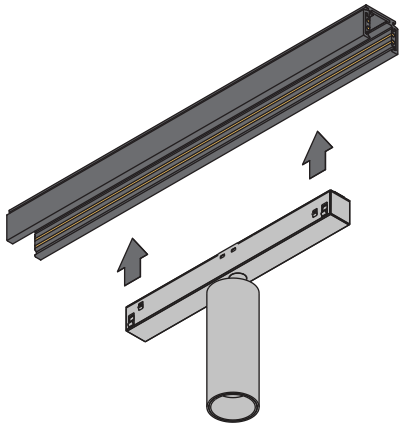



VOLTAGE	48 V
POWER spot	5.1 W
POWER medium, flood, warm dim	7 W




1.2 INSTALLATION

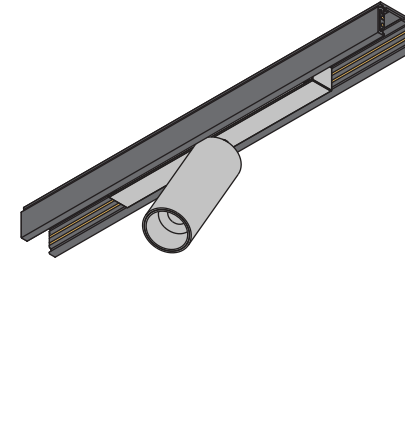

2.1 UNINSTALL

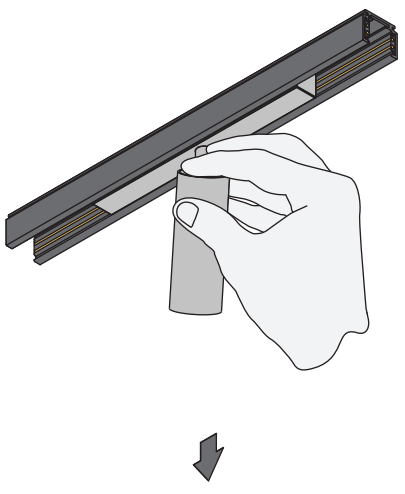


2.2 UNINSTALL

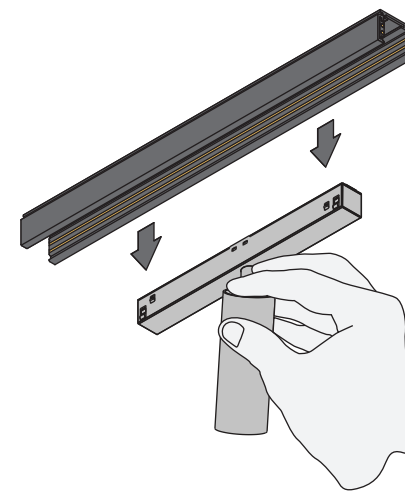


! Turn off power before taking out luminaires from the track system

ELECTRICAL

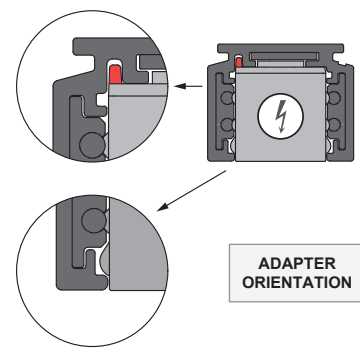

ADAPTER ORIENTATION 

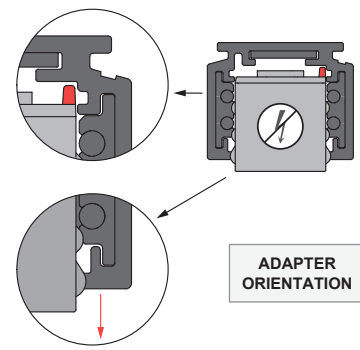

ADAPTER ORIENTATION 

 Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.
Reference number: 1016387 (spot and medium), 1016388 (flood), 1015964 (warm dim).

 **LIGHT SOURCE - DO NOT TOUCH LED**
Touching the LED can result in permanent damage of the light source. The light source and/or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

 **PREVENTING ELECTROSTATIC DAMAGE**
A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES
For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

48V

III

1-10V

DALI





IP 20





06 - 22/04/2025