


Nyto Track 48V Adjustable 40 1x LED


138301XX_138302XX_138304XX_138305XX_138307XX_138308XX_138310XX_138311XX_138313XX_138314XX_138316XX_138317XX_138319XX_138320XX_138322XX_138323XX_138324XX_138325XX

1.1 INSTALLATION



ONLY TO BE INSTALLED OUTSIDE ARM'S REACH

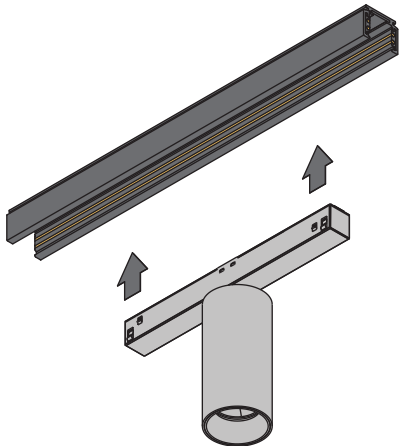



VOLTAGE	48 V
POWER spot	7.4 W
POWER medium, flood, wide flood	10.3 W
POWER warm dim flood	9 W




1.2 INSTALLATION

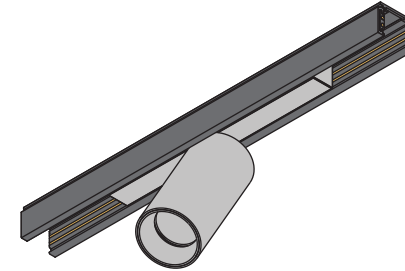

2.1 UNINSTALL

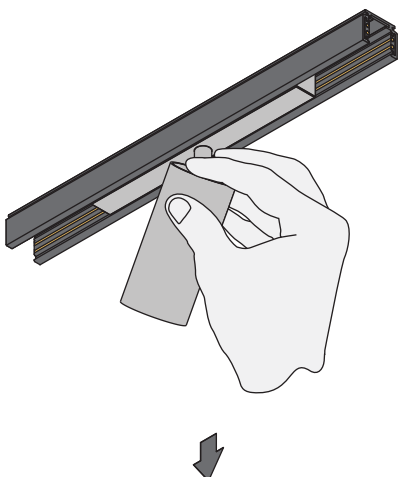

2.2 UNINSTALL

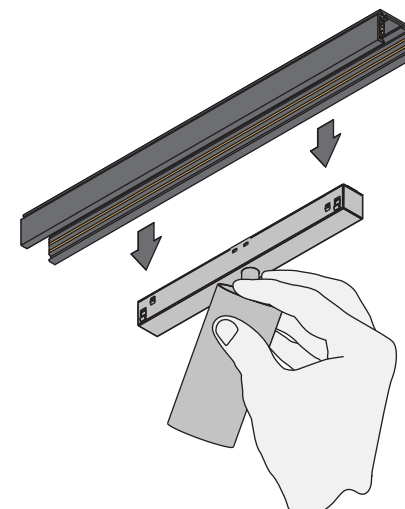

ELECTRICAL



ADAPTER ORIENTATION 



ADAPTER ORIENTATION 



Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.
Reference number: 1016382 (spot), 1016383 (medium), 1016384 (flood), 1016385 (wide flood), 1016424 (warm dim flood).



LIGHT SOURCE - DO NOT TOUCH LED
Touching the LED can result in permanent damage of the light source. The light source and/or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE
A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES
For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

05 - 25/10/2023

48V

III

1-10V

DALI





IP 20



UK CA

