


Nyto Track 48V Adjustable 50 2x LED


138432XX_138433XX_138434XX_138435XX_138436XX_138437XX_138438XX_138439XX_138440XX_138441XX_138442XX_138443XX_138444XX_138445XX_138446XX_138447XX_138448XX_138449XX_138450XX_138451XX

1.1 INSTALLATION



ONLY TO BE INSTALLED OUTSIDE ARM'S REACH

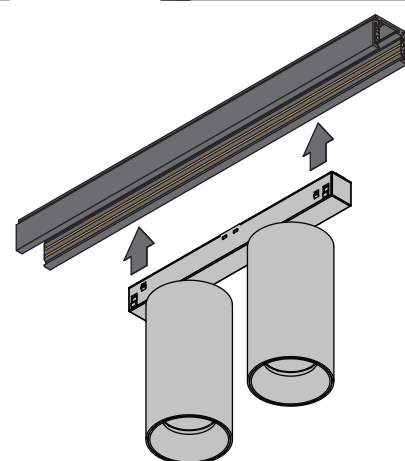



VOLTAGE	48 V
POWER super spot	20.1 W
POWER spot	27.2 W
POWER medium, flood, wide flood (1-10V)	27.2 W
POWER medium, flood, wide flood (DALI)	36.7 W



1.2 INSTALLATION

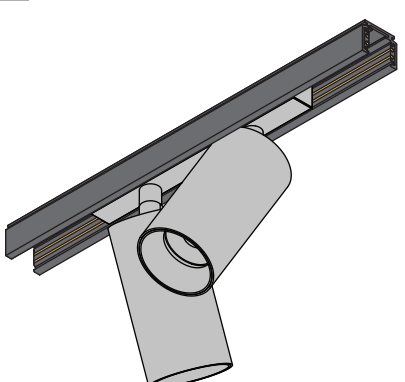


2.1 UNINSTALL

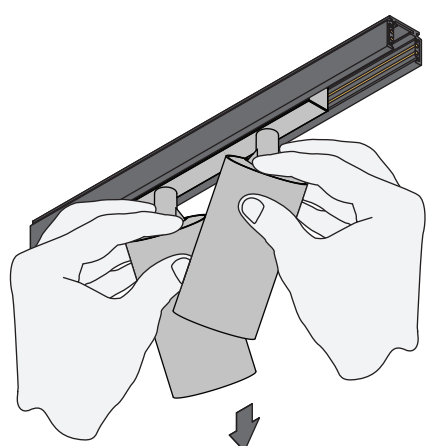


Turn off power before taking out luminaires from the track system


2.2 UNINSTALL

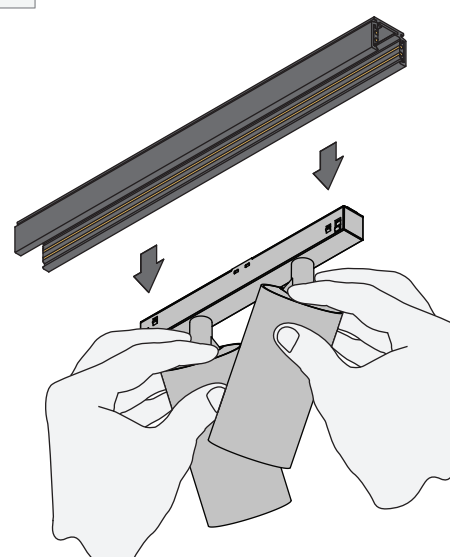

ELECTRICAL

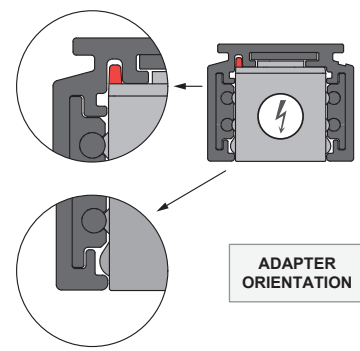

ADAPTER ORIENTATION

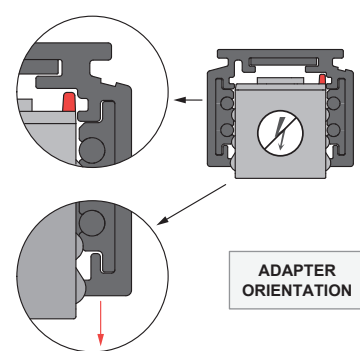

ADAPTER ORIENTATION

Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.
Reference number: 1016377 (super spot and spot), 1016378 (medium), 1016379 (flood), 1016380 (wide flood).

Light source icon

LIGHT SOURCE - DO NOT TOUCH LED
Touching the LED can result in permanent damage of the light source. The light source and/or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

ESD icon

PREVENTING ELECTROSTATIC DAMAGE
A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES
For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

0.2m

48V

III

1-10V

DALI

IP 20

UK CA

CE