


Nyto Track 48V Adjustable 40 2x LED

138326XX_138327XX_138328XX_138329XX_138330XX_138331XX_138332XX_138333XX_138334XX_138335XX_138336XX_138337XX_138338XX_138339XX_138340XX_138341XX


1.1 INSTALLATION

ONLY TO BE INSTALLED OUTSIDE ARM'S REACH

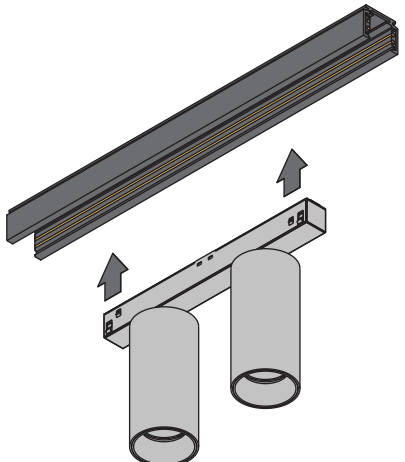


VOLTAGE	48 V
POWER spot	13.7 W
POWER medium, flood, white flood	19 W

1.2 INSTALLATION

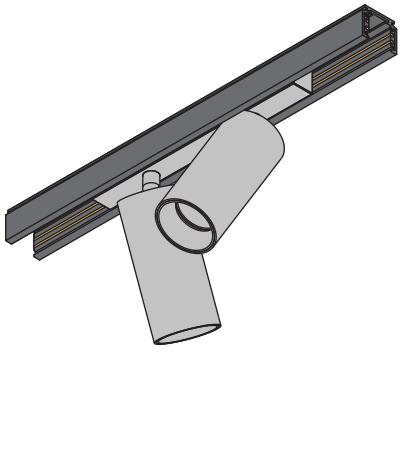

ON


2.1 UNINSTALL

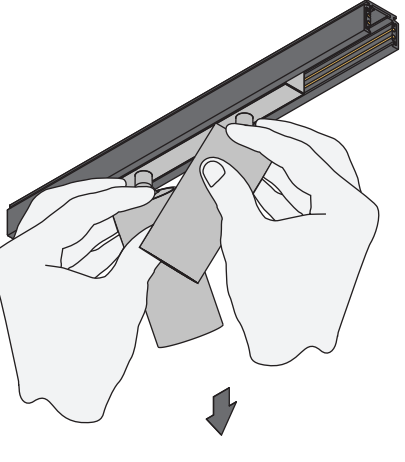

OFF


! Turn off power before taking out luminaires from the track system

2.2 UNINSTALL

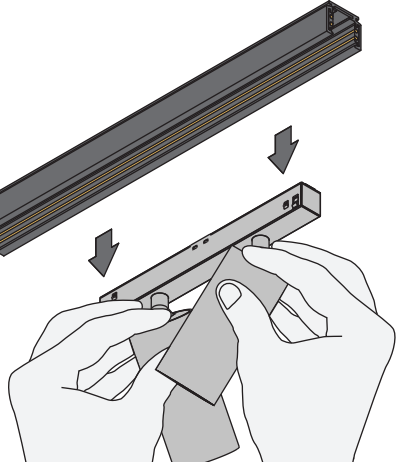


OFF


ELECTRICAL

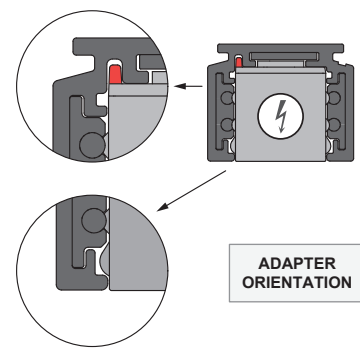

ADAPTER ORIENTATION

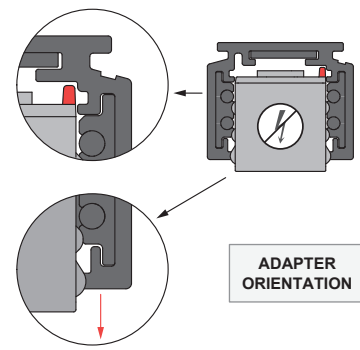

ADAPTER ORIENTATION



Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.
Reference number: 1016382 (spot), 1016383 (medium), 1016384 (flood), 1016385 (wide flood).



LIGHT SOURCE - DO NOT TOUCH LED
Touching the LED can result in permanent damage of the light source. The light source and/or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE
A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES
For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

48V

III

1-10V

DALI





IP 20



UK CA

CE

07 - 23/04/2025