



LED Driver Trailing Edge 350-700mA 4-14W

13552030


WIRING DIAGRAM




⚠ SERIAL CONNECTION, RESPECT POLARITY

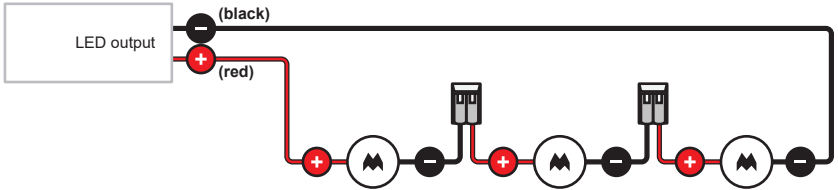

DIMENSIONS

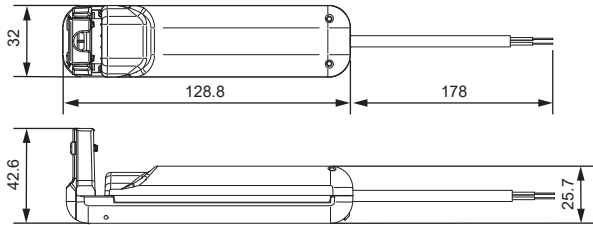

MINIMUM HEIGHT TO TILT IN DRIVER

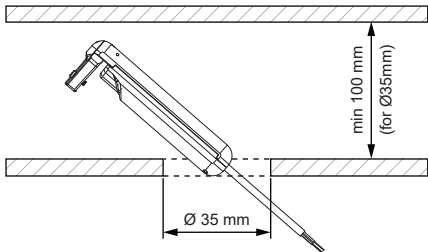

OPERATING WINDOW

350mA	3.5 - 14W	10-20Vdc	ON OFF	1	2
500mA	5 - 14W	10-20Vdc	ON OFF	1	2
700mA	7 - 14W	10-20Vdc	ON OFF	1	2

Important: Check dipswitch settings on driver before installation. Refer to fixture installation instruction for maximum drive current and set dipswitches accordingly.

OPERATING MODE

- Hybrid dimming (AM+PWM)

ELECTRICAL CHARACTERISTICS

NOMINAL INPUT VOLTAGE RANGE AC

220 - 240V

INPUT FREQUENCY RANGE

50...60HZ

DC OPERATING RANGE

None

MAXIMUM OUTPUT POWER

14W

TEMPERATURE

Tc = 83°C

Ta = -20...+45°C

EFFICIENCY AT FULL LOAD

>78%

TYPICAL CURRENT OUTPUT RIPPLE

≤ 5%

MAXIMUM DRIVERS ON MCB 16A TYPE B

80

Technical datasheet available on request

FIXTURES & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

