


Nyto Track 48V Adjustable 40 1x LED Non-Dim


138300XX\_138303XX\_138306XX\_138309XX\_138312XX\_138315XX\_138318XX\_138321XX

1.1 INSTALLATION



ONLY TO BE INSTALLED OUTSIDE ARM'S REACH

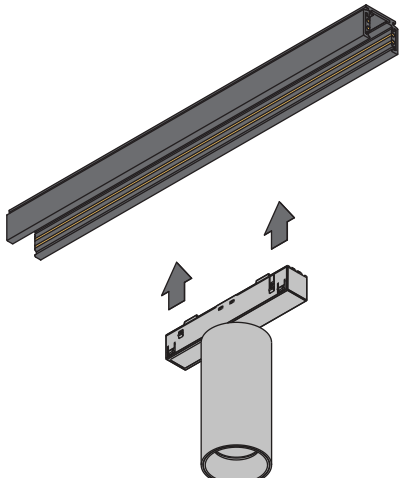



VOLTAGE	48 V
POWER spot	7.6 W
POWER medium, flood, wide flood	10.3 W



1.2 INSTALLATION

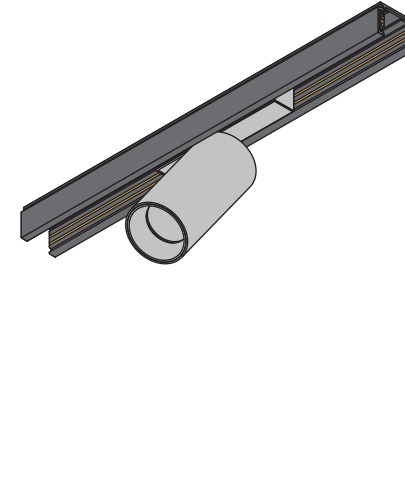


2.1 UNINSTALL

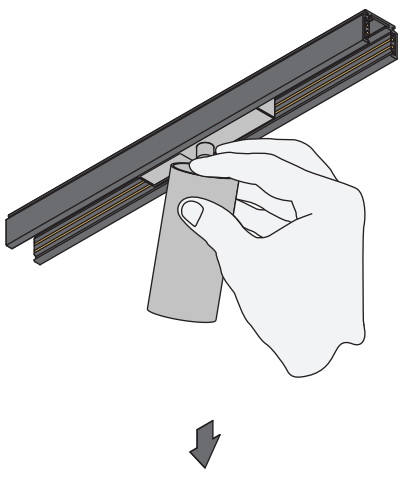

Turn off power before taking out luminaires from the track system

2.2 UNINSTALL

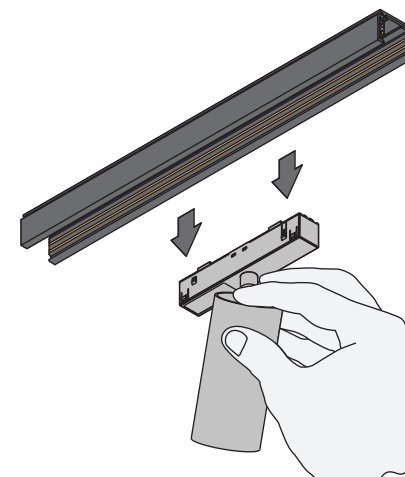

ELECTRICAL



ADAPTER ORIENTATION



ADAPTER ORIENTATION

Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.  
Reference number: 1016382 (spot), 1016383 (medium), 1016384 (flood), 1016385 (wide flood).

LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source and/or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check [www.supermodular.com](http://www.supermodular.com) or connect with your sales contact.

48V

III

IP 20

UK

CA

CE

06 - 23/04/2025