



LED Driver 24V 100W Pushdim DALI

13552730

WIRING DIAGRAM

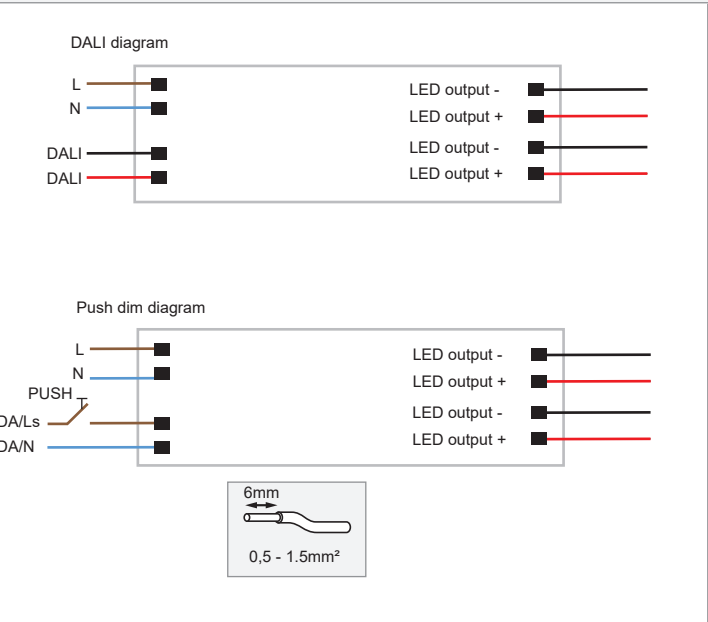

⚠ PARALLEL CONNECTION, RESPECT POLARITY

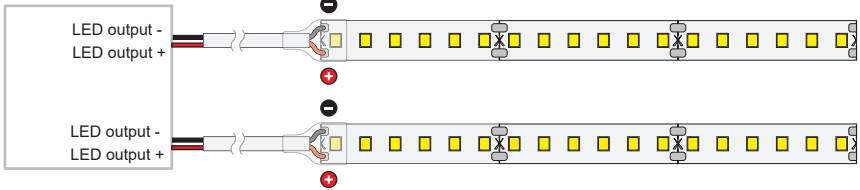

ELECTRICAL CHARACTERISTICS

NOMINAL INPUT VOLTAGE RANGE AC

220 - 240V

INPUT FREQUENCY RANGE

50...60HZ

MAXIMUM OUTPUT POWER

100W

MINIMUM OUTPUT POWER

20W

TEMPERATURE

Tc = 85°C

Ta = -25...+45°C


EFFICIENCY AT FULL LOAD

92%


MAXIMUM DRIVERS ON MCB 16A TYPE B

11

DIMENSIONS

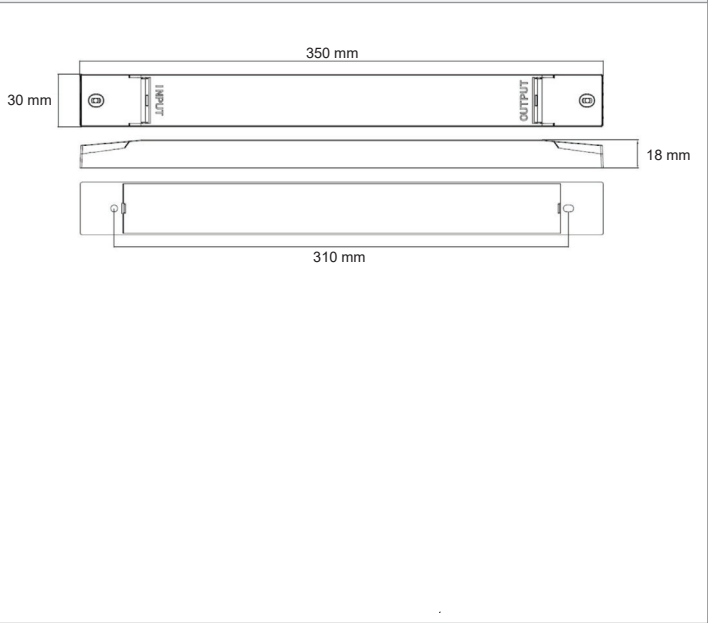

OPERATING WINDOW

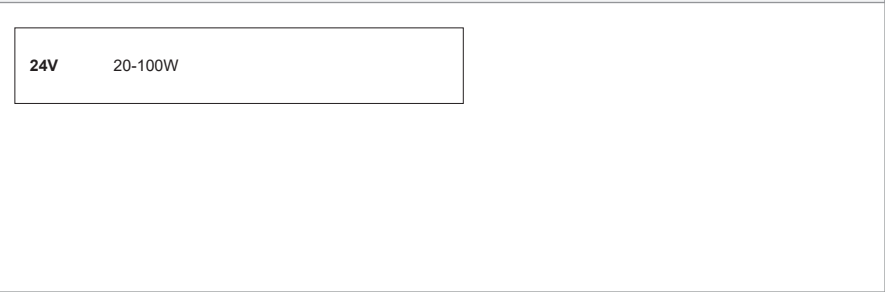

OPERATING MODE

- Compatible with standard DALI interfaces
- DALI-2 approved
- 1-100% dimming

Technical datasheet available on request

FIXTURES & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

