

Sulfer Wall Up/Down 2x IP54 LED DE

132744XX_132745XX


1

⚠ Not suitable for installation ≤5km from the coast




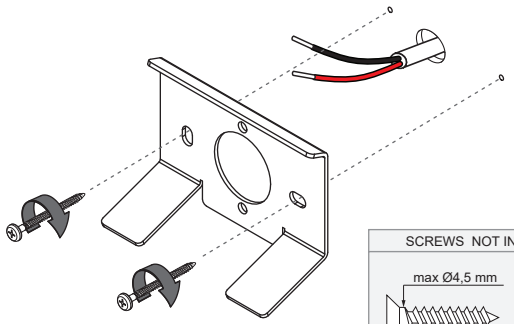


SCREWS NOT INCLUDED




ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	8,7	9,5	3,2
⊕ RED		⊖ BLACK	
Respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.			

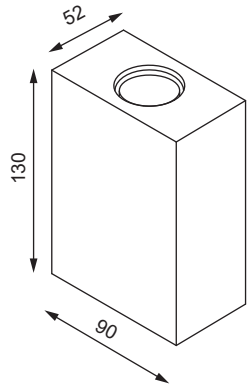





2





⚠ RESPECT POLARITY

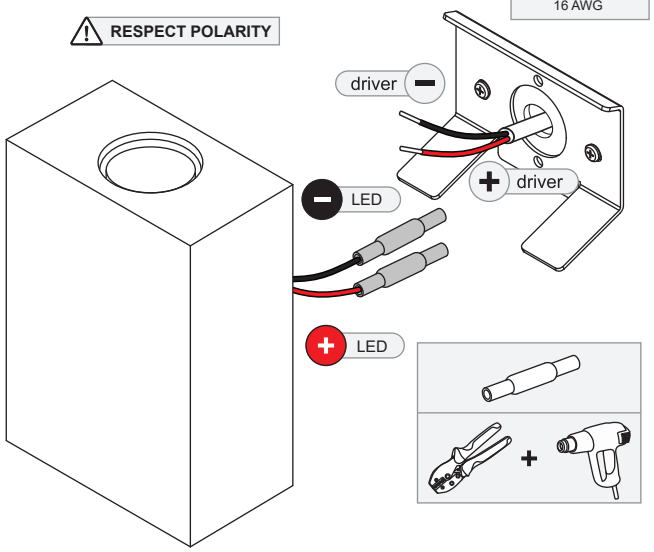

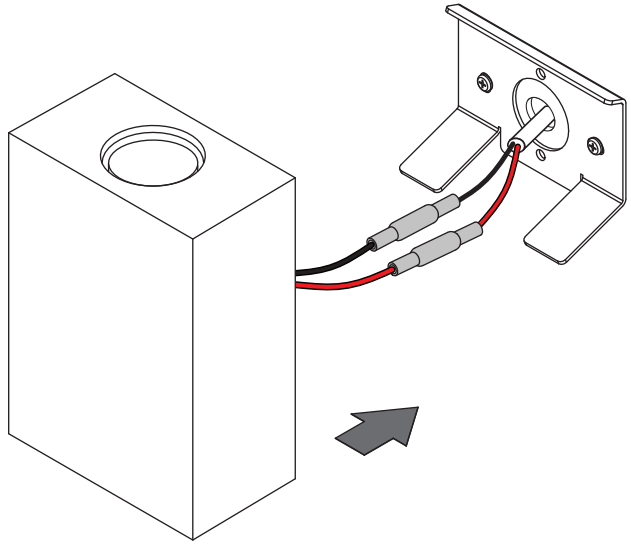

3



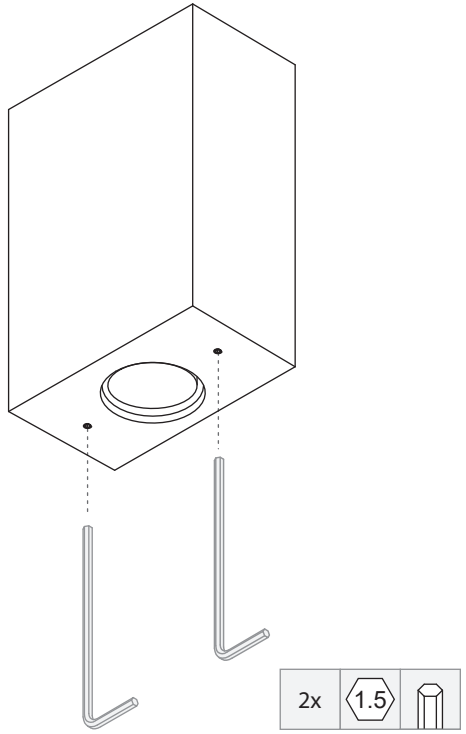

PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

CLEANING INSTRUCTIONS

To avoid corrosion, clean at least quarterly with a non-abrasive cloth and a neutral detergent. Parts of the fixture which are not protected by the installation housing may not come into contact with the ground or aggressive chemical material (e.g. fertilizers, weed killers, lime,...). Excessive use of de-icing agent in the vicinity of the fixture must be avoided.

LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source.
The light source and/or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

350mA ⎓ | III | IP 54