

Nyto Track 48V Adjustable 2.0

Overview



Very subtle, Nyto allows you to add a personal touch to the space or match an existing shade in the interior. With plenty of lighting, colour and application options, Nyto is ideal for many places and spaces.

Nyto Track 48V Adjustable 2.0


Luminaire Specifications

- For use with Pista 48V track systems
- Aperture: 1.3"
- Adjustability: 360° x 90°
- Body material: aluminum
- Body finish: powder coat
- Inner glare control ring: always matte black
- Upon insertion, fixtures lock into the track
- Fixtures can be moved in the track by sliding
- Force to remove from track: 13.5lbs
- Can be provided with honeycomb (consult the factory for details)


Finish Information




Black Structure (BLS)
Powder Coat (Matte)



White Structure (WHS)
Powder Coat (Matte)



Nyto Track 48V Adjustable 2.0 1x



Nyto Track 48V Adjustable 2.0 2x

Pista Track Compatibility

	Surface Track Suspended Track	Suspended Up / Down Track		Recessed Flanged Track	Recessed Trimless Track
		Up Portion	Down Portion		
Nyto Track 48V Adjustable 2.0 1x	Ⓜ		Ⓜ	Ⓜ	Ⓜ
Nyto Track 48V Adjustable 2.0 2x	Ⓜ		Ⓜ	Ⓜ	Ⓜ

See separate track datasheets for track information and accessories

Ordering Information

NYTO-T48-A-2.0	-		-		-	DY	-		-	
Nyto Track 48V Adjustable 2.0		1X 1 Lamp		27 2700K		SS Super Spot (11°)		DY Dry Location		0101 0-10V
		2X 2 Lamp		30 3000K		S Spot (17°)				D DALI-2 ⁽²⁾
				35 3500K		M Medium (28°)				
				WD Warm Dim 3000K - 1800K ⁽¹⁾		F Flood (44°)				
						WF Wide Flood (58°)				
						WD versions				
						F Flood (43°)				
										BLS Black Structure
										WHS White Structure


⁽¹⁾ Warm Dim option is only available for 1 Lamp versions

⁽²⁾ DALI-2 option is only available for 1 Lamp versions


Nyto Track 48V Adjustable 2.0

Performance Specifications (per luminaire)


Luminaire	Fixed CCT	Fixed CCT	Warm Dim
	Super Spot	Spot / Medium / Flood / Wide Flood	Flood
Weight (1x version)	0.6lbs	0.6lbs	0.6lbs
Weight (2x version)	1.0lbs	1.0lbs	/
Adjustability	360° x 90°	360° x 90°	360° x 90°
Location	dry	dry	dry
IP Rating	IP20	IP20	IP20
CRI*	91, R9: 50	92, R9: 72	93, R9: 78
Lifetime	L70 B20 @ 50,000 hrs	L80 B10 @ 50,000 hrs	L90 B10 @ 50,000 hrs
UGR & Photometric Files	see website	see website	see website

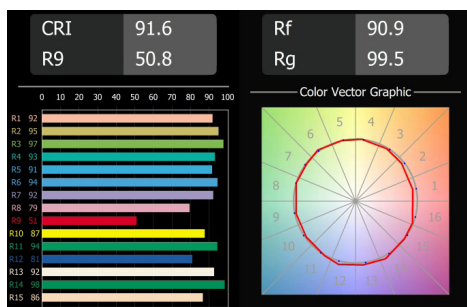

Fixed CCT (Super Spot)*

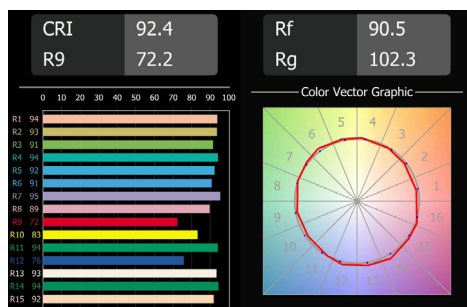

Fixed CCT (Spot / Medium / Flood / Wide Flood)*

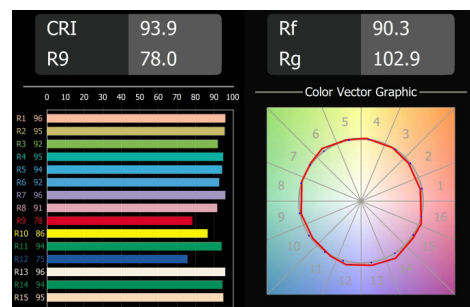

Warm Dim (Flood)*

Electrical (typical)	Dim Type	Input Voltage	Connected Load	Dim Level***
1x Fixed CCT (Super Spot)	0-10V	48VDC	11.0W	1%
1x Fixed CCT (Super Spot)	DALI-2**	48VDC	11.0W	1%
1x Fixed CCT (Spot)	0-10V	48VDC	14.9W	1%
1x Fixed CCT (Spot)	DALI-2**	48VDC	14.9W	1%
1x Fixed CCT (Medium / Flood / Wide Flood)	0-10V	48VDC	19.3W	1%
1x Fixed CCT (Medium / Flood / Wide Flood)	DALI-2**	48VDC	19.3W	1%
1x Warm Dim (Flood)	0-10V	48VDC	9.0W	1%
1x Warm Dim (Flood)	DALI-2**	48VDC	9.0W	1%
2x Fixed CCT (Super Spot)	0-10V	48VDC	20.1W	1%
2x Fixed CCT (Spot)	0-10V	48VDC	27.2W	1%
2x Fixed CCT (Medium / Flood / Wide Flood)	0-10V	48VDC	27.2W	1%

* CRI & TM-30 Value for 3000K

** Compatible with Casambi Wireless Pista Module. See track datasheets for more details

*** Consult the factory for dimmer compatibility

Nyto Track 48V Adjustable 2.0

Output Specifications (per head)

Reference Delivered Lumens	Version	CCT	Optics	Finish
Fixed CCT (Super Spot)				
473 (ref. 1X, 3000K, SS, WHS)	1X (1.00) 2X (1.00)	2700K (1.02) 3000K (1.00) 3500K (1.04)	SS (1.00)	BLS (1.00) WHS (1.00)
Fixed CCT (Spot)				
767 (ref. 1X, 3000K, S, WHS)	1X (1.00) 2X (1.00)	2700K (0.98) 3000K (1.00) 3500K (1.08)	S (1.00)	BLS (1.00) WHS (1.00)
Fixed CCT (Medium / Flood / Wide Flood)				
1302 (ref. 1X, 3000K, M, WHS)	1X (1.00) 2X (0.92)	2700K (0.96) 3000K (1.00) 3500K (1.08)	M (1.00) F (0.97) WF (0.94)	BLS (1.00) WHS (1.00)
Warm Dim (Flood)				
675 (ref. 1X, 3000K-1800K, F, WHS)	1X (1.00)	3000K - 1800K (1.00)	F (1.00)	BLS (1.00) WHS (1.00)

Multipliers are indicated between brackets: ()

Example calculation, to determine typical output for 2 Lamp version, 2700K, Flood, Black Structure: $1302 \times (0.92) \times (0.96) \times (0.97) \times (1.00) = 1115$ lumens

Listings and Certifications

- Classified: cULus
- Dry locations



Warranty

- Visit <https://www.supermodular.com/en-us/warranty>