

Date

Customer

Project

Type

SLD20 Suspended

Light in form, pure in function. With its slim 20 mm profile, SLD20 brings elegant light lines to any space. Customisable in length, colour, and configuration, it ensures seamless applications and a stylish ambience.



Base Profile

Dimensions	20mm x 35mm (h x w)
Base thickness	1,5mm
Mounting	Ceiling
Indoor/Outdoor	Indoor
Finish (RAL finish available on request)	Brushed anodised: bronze, champagne, silver bronze Fine structured scratch resistant powder coating: black, white
IP rating	IP20
Glow Wire Test	960°
CRI	90+
Warranty	5 years


Diffuser

Type	Polycarbonate (poly and poly in)
------	----------------------------------

Lighting Modules

Linear Lighting module

LED type	LED strip 24V
Colour temperature	2700K, 3000K, 4000K (3500K on request)
Dimming	Non-dimmable, 1-10V, 0-10V, Dali/Pushdim

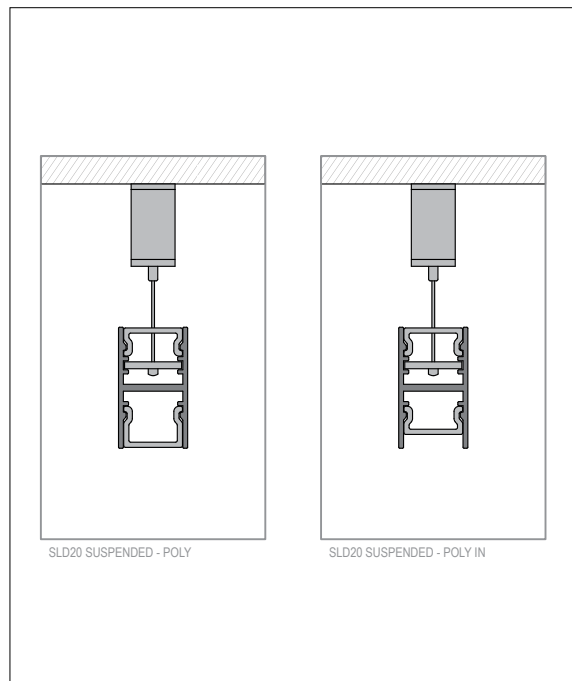

Finish Information

(RAL finish available on request)




silver bronze
(brushed anodised)



bronze
(brushed anodised)



champagne
(brushed anodised)




white structure
(powder coating)




black structure
(powder coating)

Base Profile




- 93630009** SLD20 PROFILE SURFACE WHITE STRUCTURE /M
- 93630032** SLD20 PROFILE SURFACE BLACK STRUCTURE /M
- 93630082** SLD20 PROFILE SURFACE BRONZE BRUSHED ANODISED /M
- 93630041** SLD20 PROFILE SURFACE CHAMPAGNE BRUSHED ANODISED /M
- 93630084** SLD20 PROFILE SURFACE SILVER BRONZE BRUSHED ANODISED /M

Diffuser




- 93632100** SLD20 DIFFUSER IN /M




- 93632000** SLD20 DIFFUSER /M

Endplate




- 93631009** SLD20 ENDPLATE WHITE STRUCTURE
- 93631032** SLD20 ENDPLATE BLACK STRUCTURE
- 93631015** SLD20 ENDPLATE CHAMPAGNE BRUSHED
- 93631014** SLD20 ENDPLATE BRONZE BRUSHED
- 93631016** SLD20 ENDPLATE SILVER BRONZE BRUSHED

Cover




- 93633209** SLD20 BACK COVER 1000 WHITE STRUCTURE
- 93633232** SLD20 BACK COVER 1000 BLACK STRUCTURE
- 93633309** SLD20 BACK COVER 2000 WHITE STRUCTURE
- 93633332** SLD20 BACK COVER 2000 BLACK STRUCTURE

Connection




- 93633102** SLD20 CONNLEDSTR24V SP BL
- 93633138** SLD20 CONNLEDSTR24V SP WH

Fixation / Mounting




- 93632609** SLD20 SUSPENSION KIT 2000 WHITE STRUCTURE
- 93632632** SLD20 SUSPENSION KIT 2000 BLACK STRUCTURE
- 93632709** SLD20 SUSPENSION KIT 6000 WHITE STRUCTURE
- 93632732** SLD20 SUSPENSION KIT 6000 BLACK STRUCTURE




- 93001209** SUSPENSION HINGE WHITE STRUCTURE
- 93001232** SUSPENSION HINGE BLACK STRUCTURE

Electrical Supply




93002001 POWER FEED CONNECTION BOX SQUARE 2P WHITE STRUCTURE

93002002 POWER FEED CONNECTION BOX SQUARE 2P BLACK STRUCTURE



93640500 POWER FEED CABLE 2X0,75 COAXIAL BLACK /M



Linear LED Strip 24V

1000lm/m

	2700K	3000K	4000K
mounted/m	93000540	93000541	93000542

2000lm/m


	2700K	3000K	4000K
mounted/m	93000004	93000005	93000006

Lamp type	LED STRIP - diffuser poly included		
Delivered lumens		1000lm/m	2000lm/m
	2700K	794lm/m	1390lm/m
	3000K	847lm/m	1420lm/m
	4000K	770lm/m	1352lm/m
Connected load	2700K	10.8W/m	18.9W/m
	3000K	10.8W/m	18.9W/m
	4000K	9.6W/m	16.6W/m
Efficacy	2700K	74lm/W	74lm/W
	3000K	78lm/w	75lm/W
	4000K	80lm/W	81lm/W
Binning	3SDCM		
Lifetime	L80 B10 @50000hrs		

REMOTE DRIVERS

12405830	LED DRIVER 24V 20W
12405030	LED DRIVER 24V 150W
12402030	LED DRIVER 24V 20W 1-10V
12409730	LED DRIVER 24V 60W NON-DIM/0/1-10V
12409830	LED DRIVER 24V 100W NON-DIM/0/1-10V
12409930	LED DRIVER 24V 150W NON-DIM/0/1-10V
13550830	LED DRIVER 24V 100W PUSHDIM/DALI
13550930	LED DRIVER 24V 150W PUSHDIM/DALI

SURFACE MOUNTED DRIVERS



93009504	LED DRIVER CONSTANT VOLTAGE 24V SURFACE (FOR SUSPENDED MOUNTING) NON-DIM 100W WHITE STRUCTURE
93009505	LED DRIVER CONSTANT VOLTAGE 24V SURFACE (FOR SUSPENDED MOUNTING) NON-DIM 100W BLACK STRUCTURE
98009504	LED DRIVER CONSTANT VOLTAGE 24V SURFACE (FOR SUSPENDED MOUNTING) DALI/PUSH-DIM 20-100W WHITE STRUCTURE
98009505	LED DRIVER CONSTANT VOLTAGE 24V SURFACE (FOR SUSPENDED MOUNTING) DALI/PUSH-DIM 20-100W BLACK STRUCTURE